

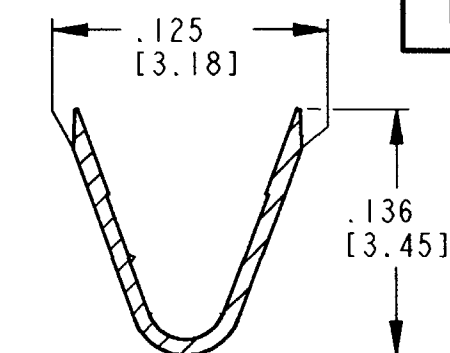


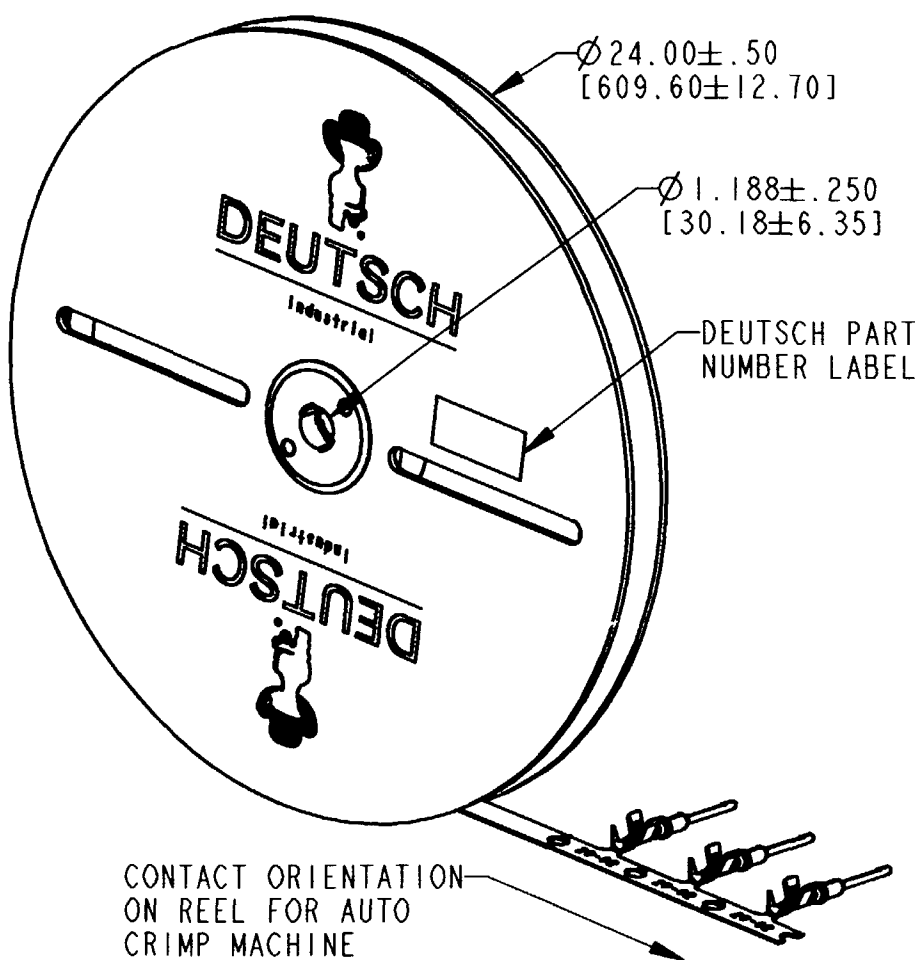


SECTION A-A
CONDUCTOR WINGS

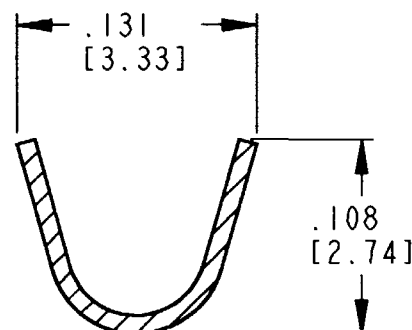

SECTION B-B
INSULATION WINGS

REV
D 1060-20-02 * *

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
A	REVISED/REDRAWN PER E.O. P17019	12-11-00	R.D.R.
B	REVISED PER E.O. P17936	11-1-02	R.D.R.
C	REVISED PER E.O. P20044	11-3-08	R.D.R.
D	REVISED PER E.O. P20392	12-3-09	RDR

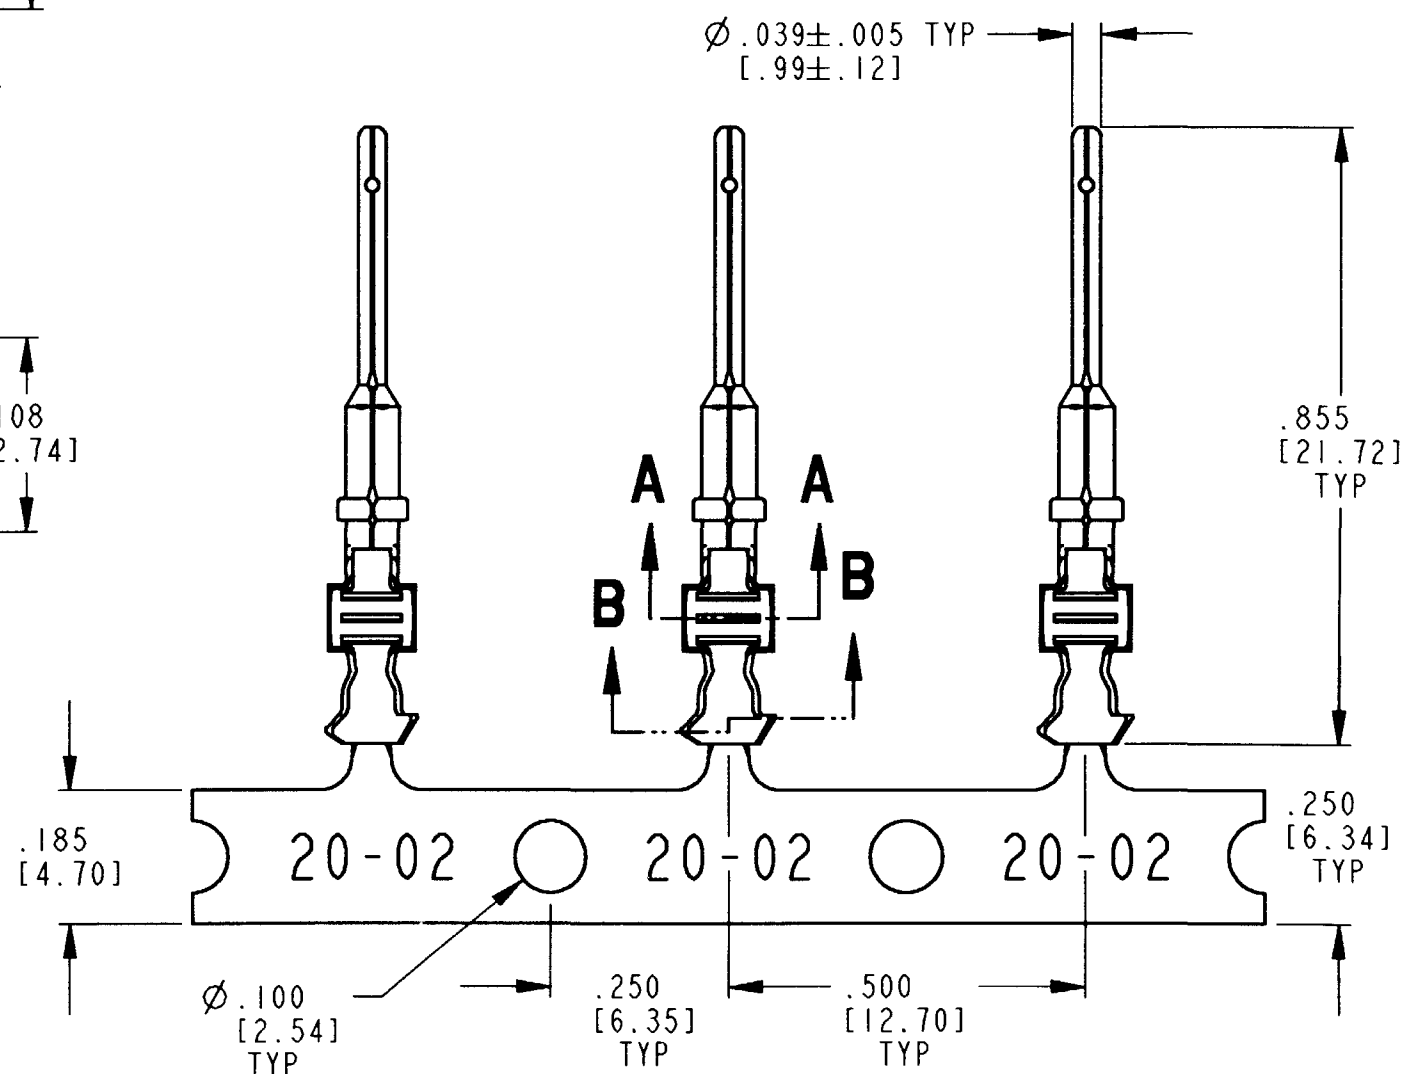

7. MATERIAL: COPPER ALLOY.
6. WHEN ** = 22 PLATING IS NICKEL.
** = 44 PLATING IS GOLD.
** = 77 PLATING IS TIN.
5. SEE 0425-015-0000 FOR CONTACT PERFORMANCE AND WIRE APPLICATION CHARACTERISTICS.
4. THIS CONTACT MAY BE CRIMPED WITH DCT20-02-00 AUTOMATIC DIE OR DTT-20-02 HAND TOOL. SEE DRAWING 0425-207-0000 FOR APPLICABLE WIRE SIZE, INSULATION DIAMETER RANGE, AND CRIMPING INFORMATION.
3. ONE REEL CONTAINS APPROXIMATELY 4000 CONTACTS.
2. DIMENSIONAL TOLERANCE: $\pm .025$ [0.63].
1. DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

SIGNATURE & DATE	
DR	J. APOSTOL 01 DEC 2009
CHK	D. May 12/2/09
PE	D. May 12/2/09
APPD	R. Reed 12-3-09
SCALE	NONE
WT	

STAMPED CONTACT
PIN
SIZE 20

ENVELOPE

EP	MATL. CODE
3850 INDUSTRIAL AVE. HEMET, CA 92545	
B 1060-20-02 * *	
DWG SIZE	CODE 11139 SHEET 1 OF 1