

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20




ALL RIGHTS RESERVED.

LOC





DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	I	FIRST ISSUE	18APR2013	WJ	DH
	A	ECR-13-011357	17JUL2013	RK	MG

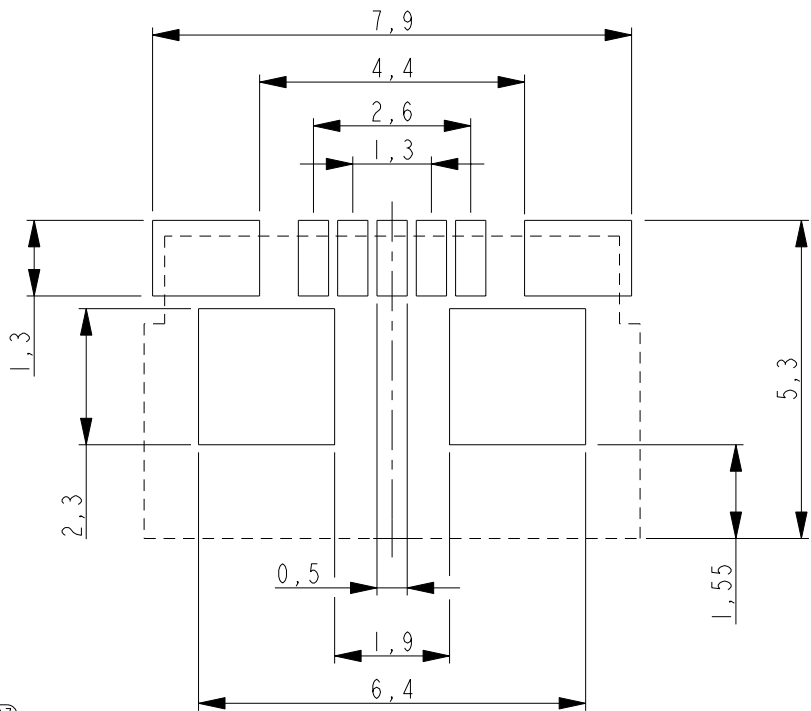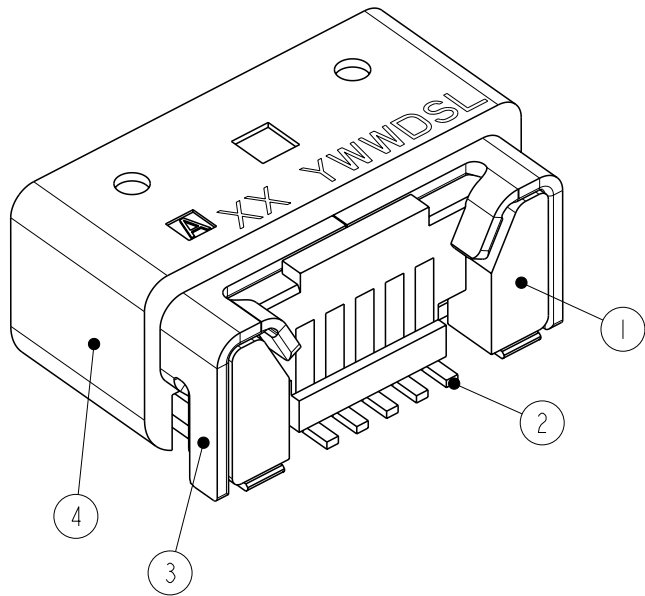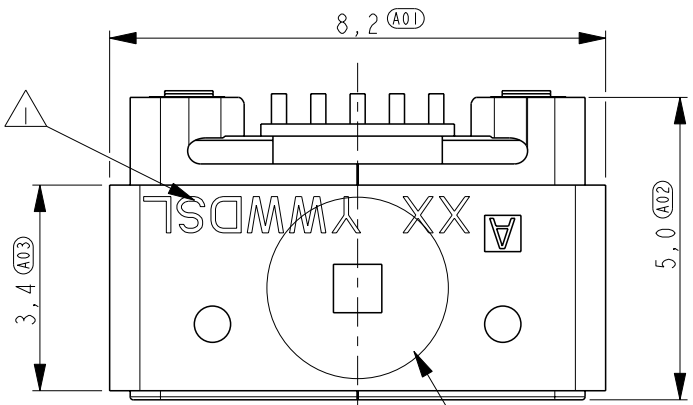

RECOMMENDED PWB LAYOUT (REF)

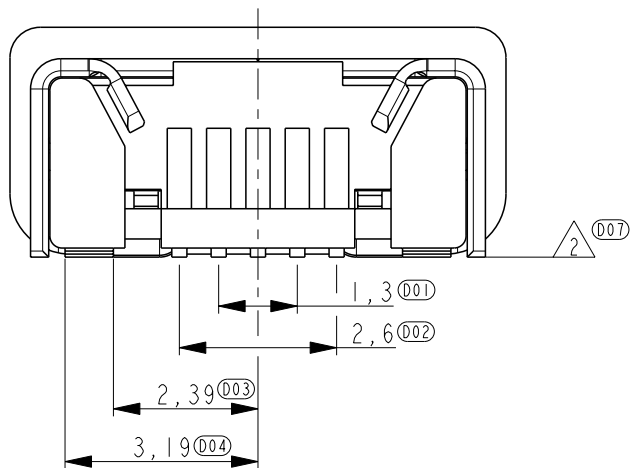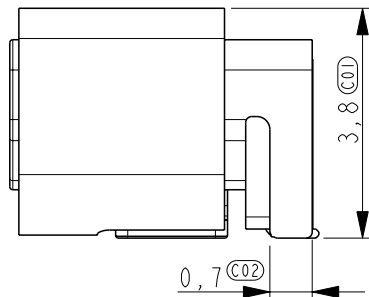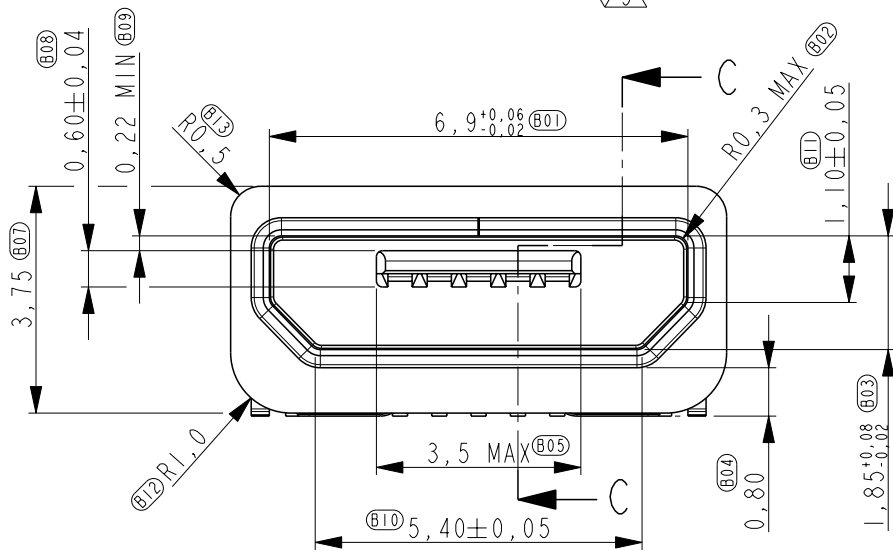

SECTION C-C

NOTES:



- 1 VERSION: XX, PRODUCTION DATE: YWWD, SHIFT CODE: S, PRODUCTION LINE NO: L.
- 2 COPLANARITY OF 11 SOLDER SURFACES 0,08 MAX AFTER 3X REFLOW.
- 3 PICK AND PLACE AREA Ø 3

TE PN: 2246077-1




THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±0,2 1 PLC ±0,1 2 PLC ±0,1 3 PLC ±0,025 4 PLC ±0,001 ANGLES ±2°
MATERIAL -	FINISH -

4	SLEEVE	LCP	
3	SHELL	STAINLESS STEEL	Tin over Nickel plating
2	CONTACT	COPPER ALLOY	Gold over Nickel plating
1	HOUSING	LCP	
ITEM NO.	DESCRIPTION	MATERIAL	FINISH
DWN	18APR2013		
W. Jansen			
CHK	18APR2013		
W. Jansen			
APVD	18APR2013		
D. Halberstadt			
PRODUCT SPEC	108-19460		
APPLICATION SPEC	-		
WEIGHT	0,33gr		
CUSTOMER DRAWING			
NAME	SPLASH-PROOF MICRO USB B-TYPE 0,8 mm OFFSET		
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2246077	-
SCALE	8:1	SHEET	1 OF 3
REV	A		

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
-	-		-	SEE SHEET 1	-	-

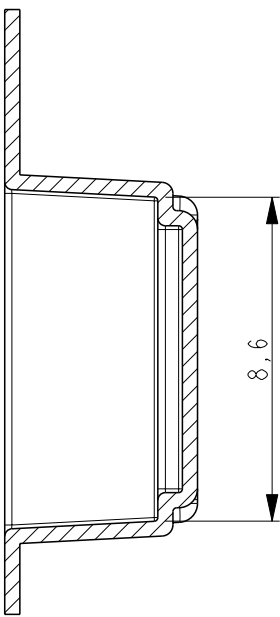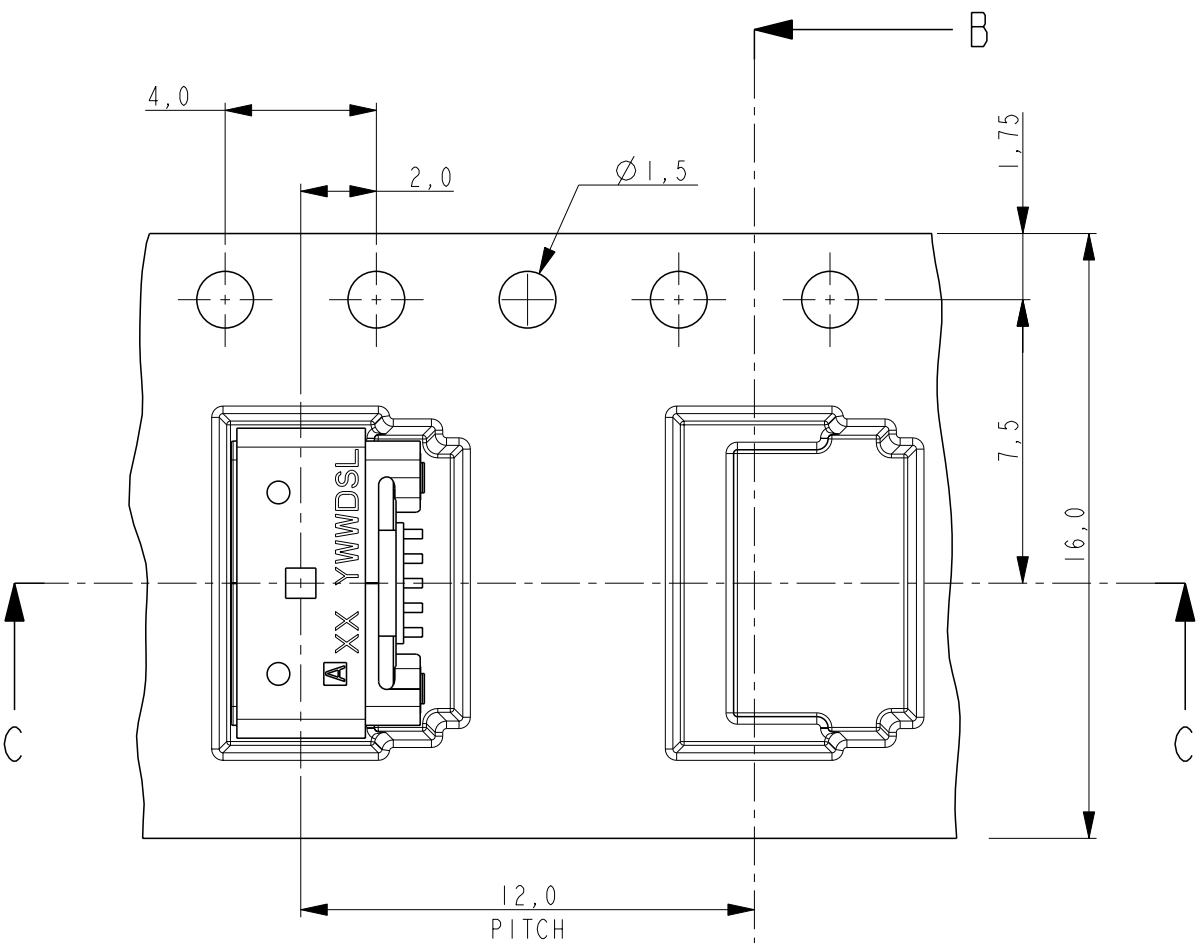


SECTION B - B

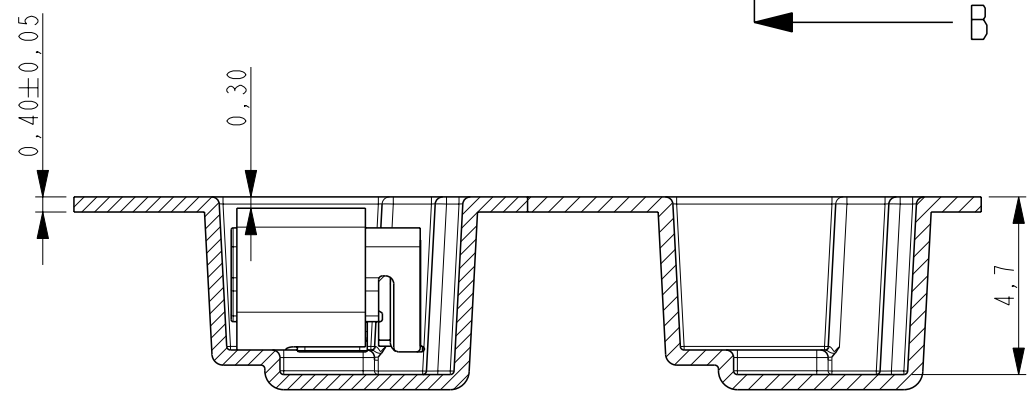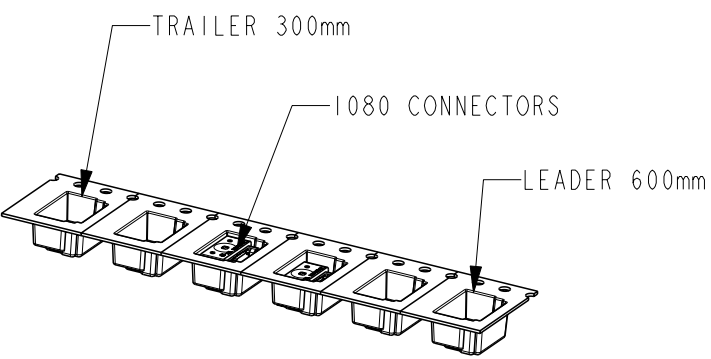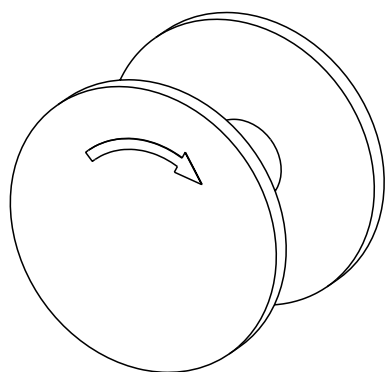

SECTION C - C

NOTES:
COVER, EMOSS TAPE AND REEL ACCODING EIA STANDARD 481-D

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W. Jansen	18APR2013	 TE Connectivity			
		CHK W. Jansen	18APR2013				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SPLASH-PROOF MICRO USB B-TYPE 0,8 mm OFFSET			
		0 PLC ±0,2 1 PLC ±0,1 2 PLC ±0,1 3 PLC ±0,025 4 PLC ±0,001 ANGLES ±2°					
PRODUCT SPEC 108-19460		SIZE A3	CAGE CODE 00779	DRAWING NO C-2246077	RESTRICTED TO -		
APPLICATION SPEC -							
WEIGHT 0,33gr							
CUSTOMER DRAWING		SCALE 5:1	SHEET 2	OF 3	REV A		
MATERIAL -		FINISH -					

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

-

-


SEE SHEET 1

-


-

-

SEE DETAIL B

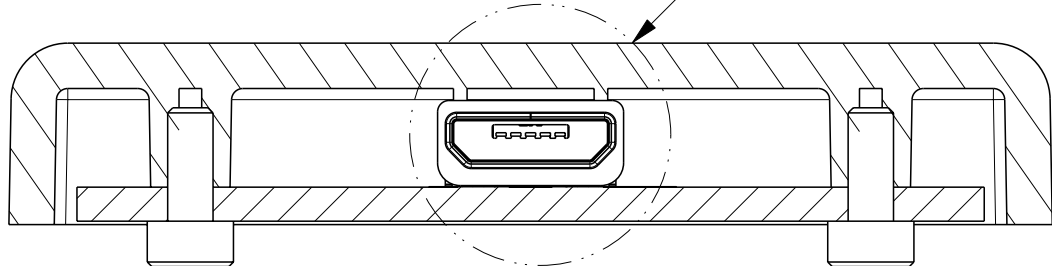


SECTION D-D

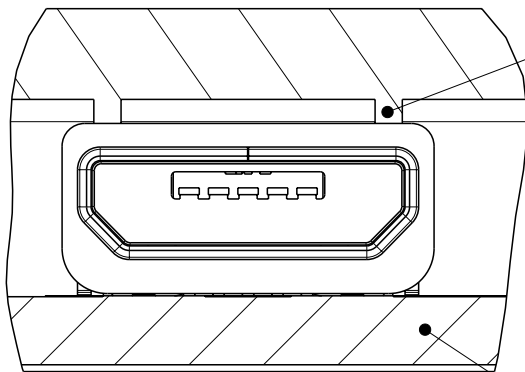

COVER RIB



PWB

DETAIL B
SCALE 6:1

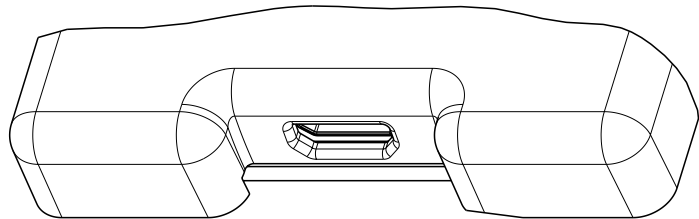


SCALE 2:1

SEE DETAIL A

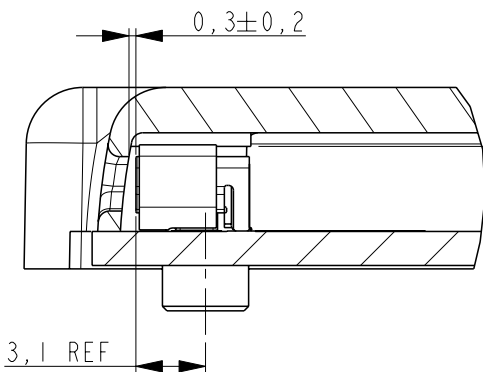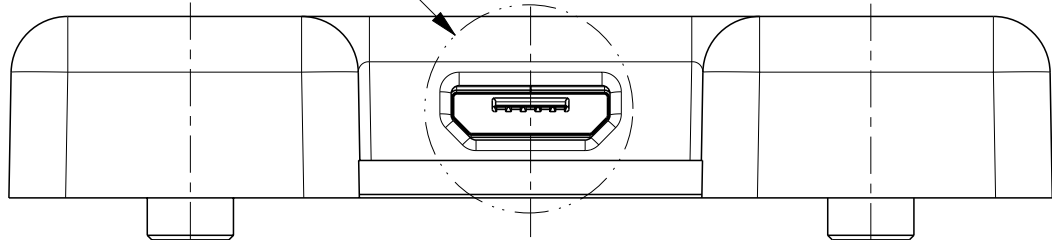


SECTION A-A

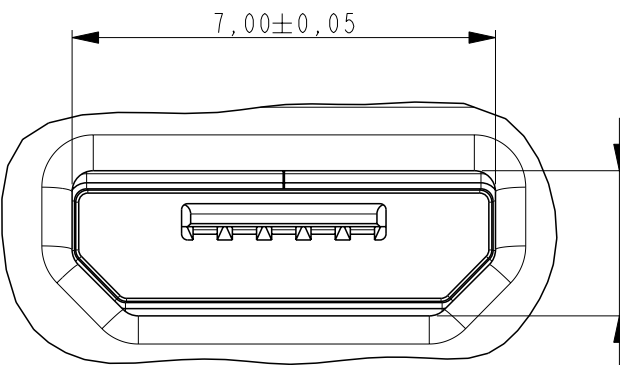

RECOMMENDED COVER HOLE SHAPE (REF)

DETAIL A
SCALE 8:1

RECOMMENDED PWB AND COVER ASSEMBLY (REF)

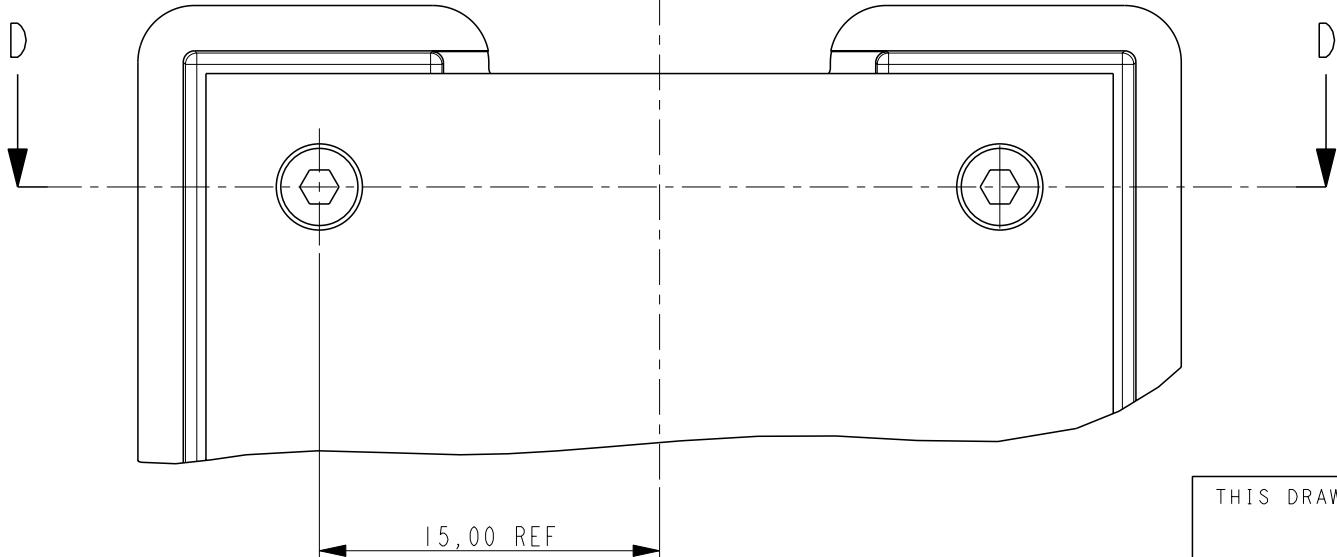


15,00 REF

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±0,2
1 PLC ±0,1
2 PLC ±0,1
3 PLC ±0,025
4 PLC ±0,001
ANGLES ±2°

MATERIAL

-

FINISH

-

DWN 18APR2013

W. Jansen

CHK 18APR2013

W. Jansen

APVD 18APR2013

D. Halberstadt

PRODUCT SPEC

108-19460

APPLICATION SPEC

-

WEIGHT

0,33gr

CUSTOMER DRAWING



TE Connectivity

NAME

SPLASH-PROOF MICRO USB
B-TYPE
0,8 mm OFFSET

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-2246077

-

SCALE 3:1

SHEET 3 OF 3

REV A