



DESCRIPTION: M12 MALE - PANEL MOUNT (REAR) - SOLDER CUP - 12 POS.

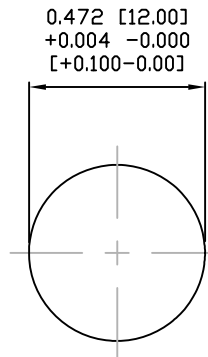

PANEL CUTOUT

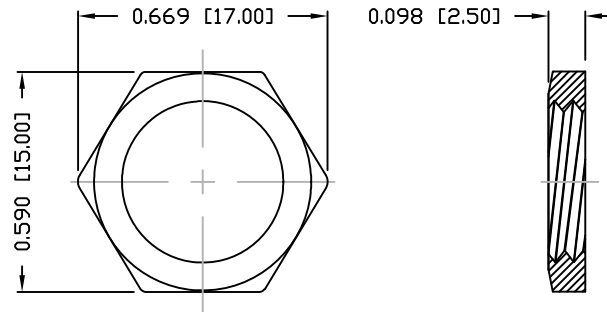

NUT

NOTE:

MATERIAL

HOUSING:

PBT UL94V-0, BLACK

CONTACT:

BRASS

SHELL:

BRASS

NUT:

BRASS

O-RING:

EPDM

FINISH

CONTACT:

GOLD PLATED

OVER 50u" NICKEL

SHELL:

NICKEL PLATED

NUT:

NICKEL PLATED

ELECTRICAL

RATED CURRENT:

1.5A

RATED VOLTAGE:

30V

INSULATION RESISTANCE:

100 MOhms MIN.

CONTACT RESISTANCE:

10 mOhms MAX.

WATER PROOF:

IP67



ENVIRONMENT

OPERATION TEMPERATURE:

-40°C TO +85°C

MAX WIRE AWG:

26

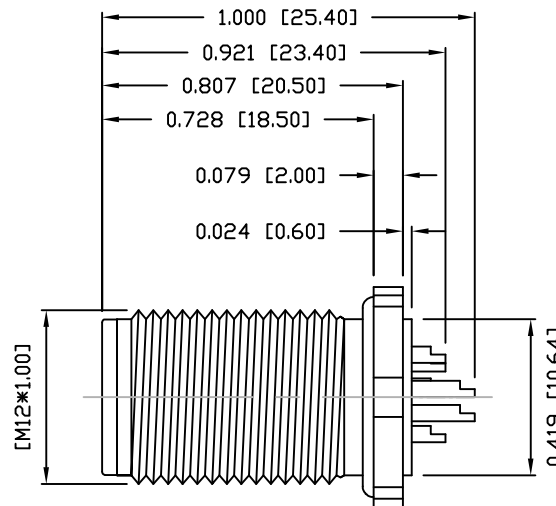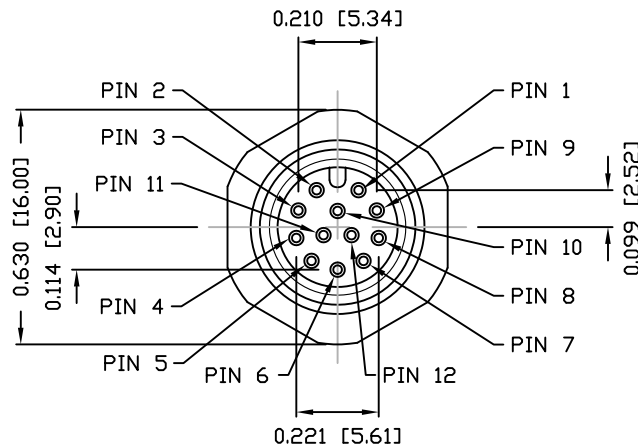

859-012-103R00Y

3 = BRASS/NICKEL SHELL & NUT
S = STAINLESS STEEL SHELL & NUT

1 = GOLD FLASH
4 = 10u" GOLD

RoHS COMPLIANT

UNITS = INCHES [MM]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

03-08-16

NorComp

SCALE:

NTS

SHEET

1

OF

1

REV

3

DWG NO.

859-012-103R00Y