



1 MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-O RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS: - PHOSPHOR BRONZE.

2 PLATING: CONTACTS - 0.76 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM TIN LEAD ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.
HOLDDOWNS: 2.54 μ m MINIMUM MATTE TIN OVER 1.27 μ m MINIMUM
NICKEL.

4 RECOMMENDED PC BOARD THICKNESS OF 1.57.

5 KAPTON VACUUM PICK UP BUTTON.

6 PLATING: CONTACTS - 0.76 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.
HOLDDOWNS: 2.54 μ m MINIMUM MATTE TIN OVER 1.27 μ m MINIMUM
NICKEL.

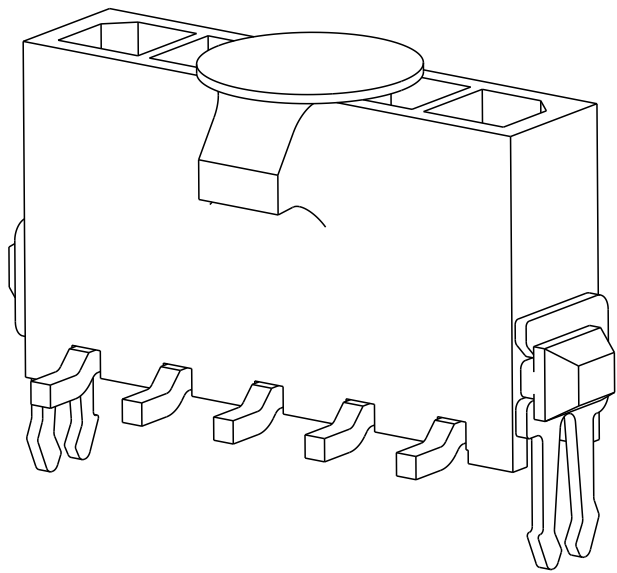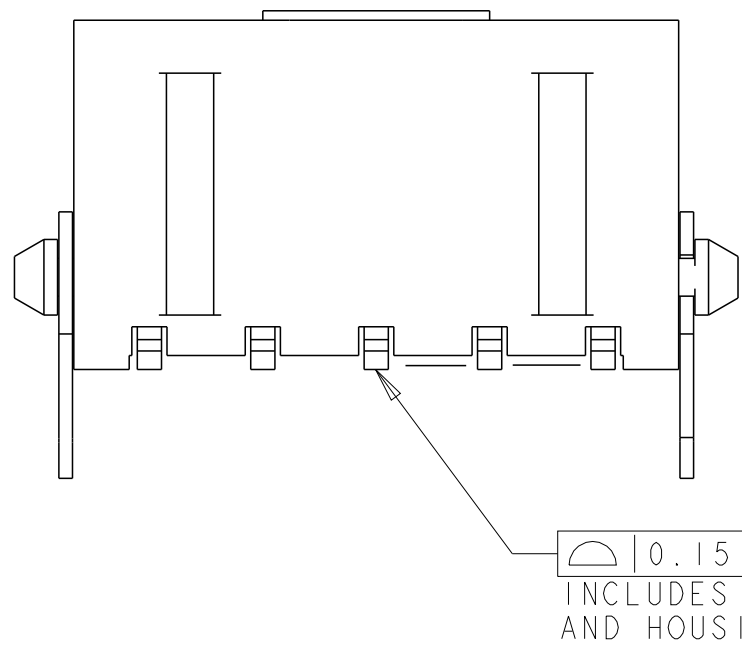

	33.00	37.43	40.00	12	3-1445095-2
	30.00	34.43	37.00	11	3-1445095-1
	27.00	31.43	34.00	10	3-1445095-0
	24.00	28.43	31.00	9	2-1445095-9
	21.00	25.43	28.00	8	2-1445095-8
	18.00	22.43	25.00	7	2-1445095-7
	15.00	19.43	22.00	6	2-1445095-6
	12.00	16.43	19.00	5	2-1445095-5
	9.00	13.43	16.00	4	2-1445095-4
	6.00	10.43	13.00	3	2-1445095-3
	3.00	7.43	10.00	2	2-1445095-2
	33.00	37.43	40.00	12	1-1445095-2
	30.00	34.43	37.00	11	1-1445095-1
	27.00	31.43	34.00	10	1-1445095-0
	24.00	28.43	31.00	9	1-1445095-9
	21.00	25.43	28.00	8	1-1445095-8
	18.00	22.43	25.00	7	1-1445095-7
	15.00	19.43	22.00	6	1-1445095-6
	12.00	16.43	19.00	5	1-1445095-5
	9.00	13.43	16.00	4	1-1445095-4
	6.00	10.43	13.00	3	1-1445095-3
	3.00	7.43	10.00	2	1-1445095-2
FINISH	DIM Z	DIM V	DIM W	NO. OF POSN	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 090CT2000 J. ROOT CHK 20-FEB-2001 K. WHITAKER APVD 20-FEB-2001 C. JONES		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH		NAME VERTICAL SURF MOUNT HEADER ASSY, 30 MIC GOLD CONTACTS, THRU HOLE HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE A2	
MATERIAL 		WEIGHT -		CAGE CODE 00779	
SEE TABLE		DRAWING NO C-1445095		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 5:1 SHEET 1 OF 1 REV C1	