

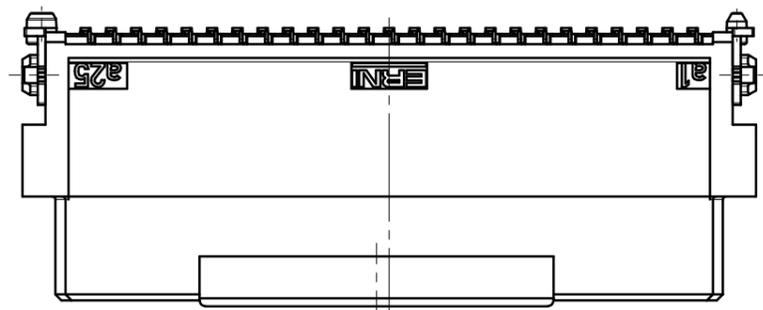
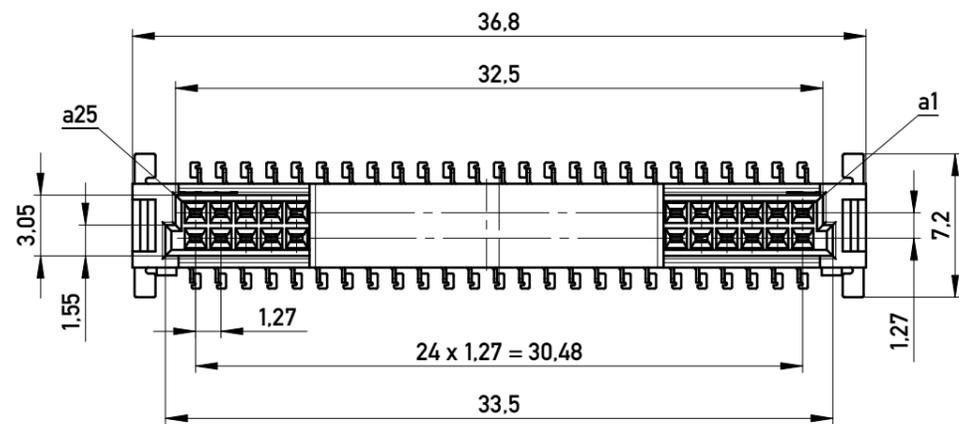


Verpackt im Gurt in Anlehnung an DIN IEC 60286-3  
*tape on reel packaging according to DIN IEC 60286-3*  
 Verpackungseinheit: 160 Stück  
*packaging unit: 160 pcs*



**Leiterplatten-Layout Vorschlag für SMT**  
*PCB-Layout Proposal for SMT*

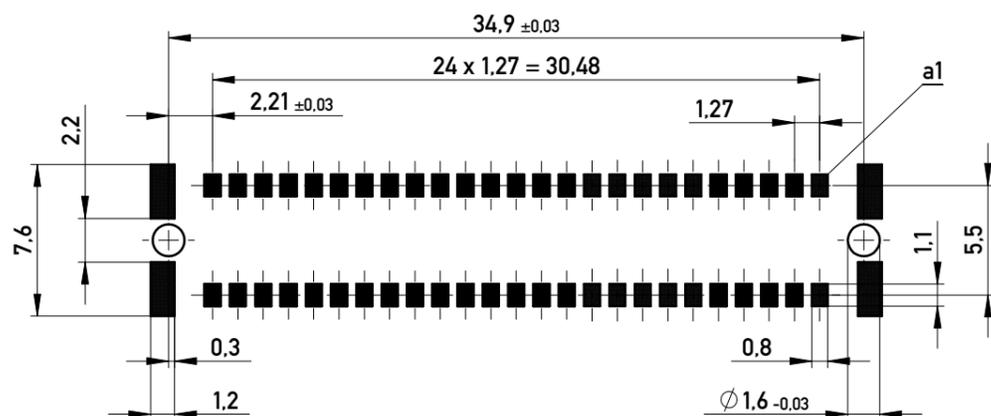


Anforderungsstufe 1  
*performance level 1*

Kontaktbereich vergoldet  
*mating area gold plating*

Anschlussbereich verzinkt 4-6 µm  
*terminal area 4-6 µm tin plating*

Koplanarität der Anschlüsse ≤ 0,1 mm  
*coplanarity area of termination ≤ 0,1 mm*

**Abspulrichtung - Reel off Direction**

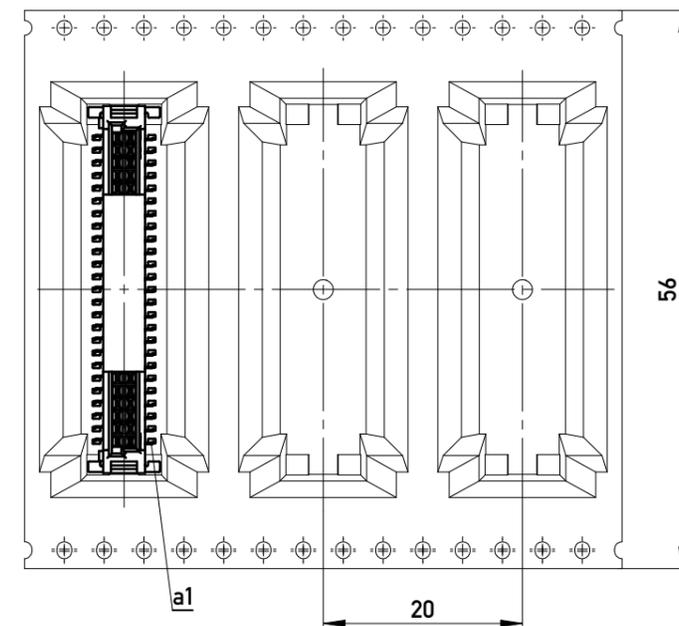

BA 7-23 - hohe Bauhöhe  
*type 7-23 - high profile*

Information:  All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances  All Dimensions in mm	Scale <b>3:1</b>	Designation <b>Federl. SMC-B 50-SMD-BA7-23</b> <i>Female SMC-B 50-SMD-type7-23</i>	
	Subject to modification without prior notice. Drawing will not be updated.		www.ERNI.com	
e Index	06.09.2018 Date	234199		I A3
		Class SMCB		

Copyright by ERNI Production GmbH & Co. KG  
 Proprietary notice pursuant to ISO 16016 to be observed.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[234199](#)