

CR1025

LITHIUM MANGANESE DIOXIDE



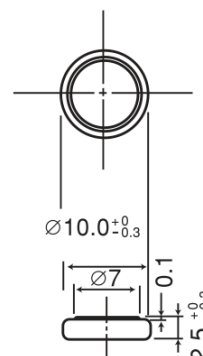
Features & Benefits

- Good pulse capability
- High discharge characteristics
- Stable voltage level during discharge
- Long-term reliability

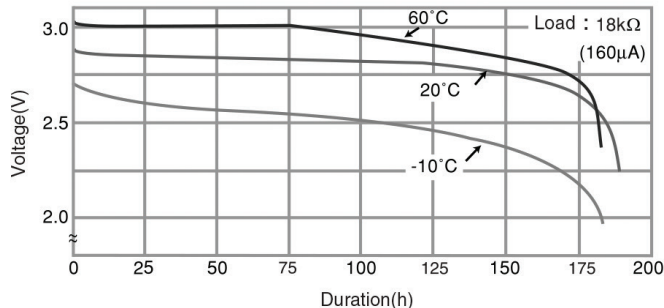
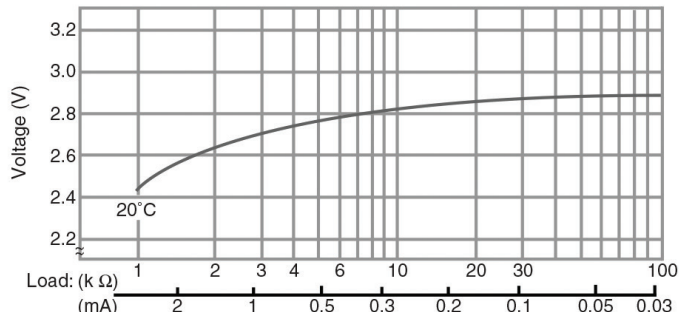
Specifications

Nominal Capacity:	30 mAh
Nominal Voltage:	3V
Weight:	0.7g
Operating Temperature:	-30°C - +60°C

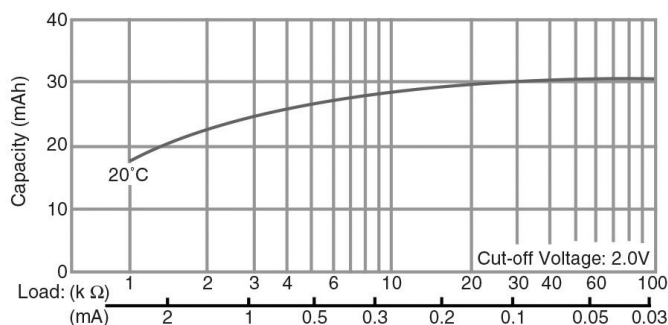
Dimensions



Temperature Characteristics

Operating Voltage vs. Load Resistance
(voltage at 50% discharge depth)

Capacity vs. Load Resistance

**⚠ WARNING**

Serious harm in as little as 2-hours if swallowed. **KEEP AWAY FROM CHILDREN.** Seek immediate medical help if swallowed. Have the doctor call the poison center at 1-(800) 498 8666 for US and Canada.
International: 303-389-1300

Product manufacturers should design their products to meet the safety requirements of Annex I of UL60065 or equivalent standards.