
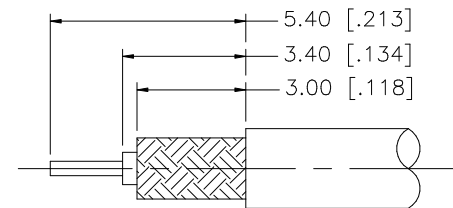
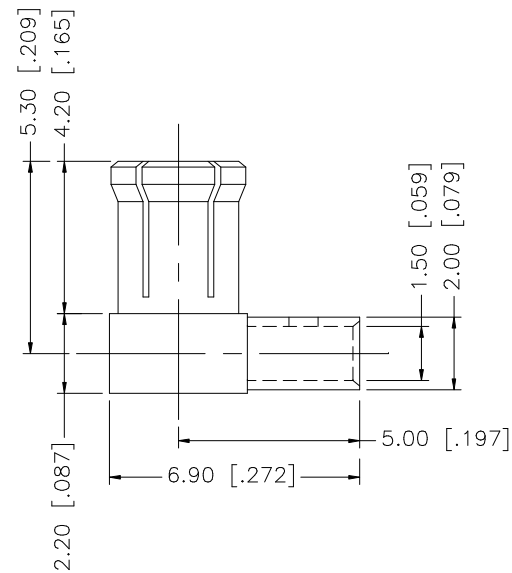


REV.	DATE	DESCRIPTION
A	01/30/04	UPDATE DRAWING FORMAT

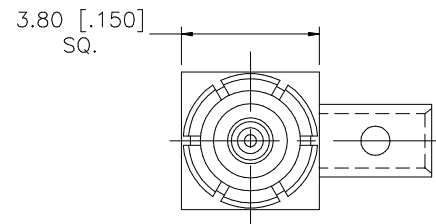

RECOMMENDED CABLE STRIPPING DIMENSIONS

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex				
8						DRAWN	G.R.S.					01/30/04
7						CHECKED			PART DESCRIPTION MCX R/A SOLDER PLUG – LOW PROFILE (FOR RG-178B/U, 196A/U CABLE)			
6						ISSUED						
5						SHEET	1 OF 1		PART NO. 252135-10			
4												
3	CONTACT PIN	BRASS	GOLD	1				DWG. NO. 252135-10.DWG				
2	INSULATOR	TEFLON	NATURAL	1								
1	HOUSING/BODY	BRASS	GOLD	1				REV. A	SIZE A	SCALE NA		
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE C:/252/225135-10.DWG					