

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

GW

-

P

LTR

DESCRIPTION

DATE

DWN

APVD


B1

REVISED PER ECO-11-005294

12APR11

RK

HMR

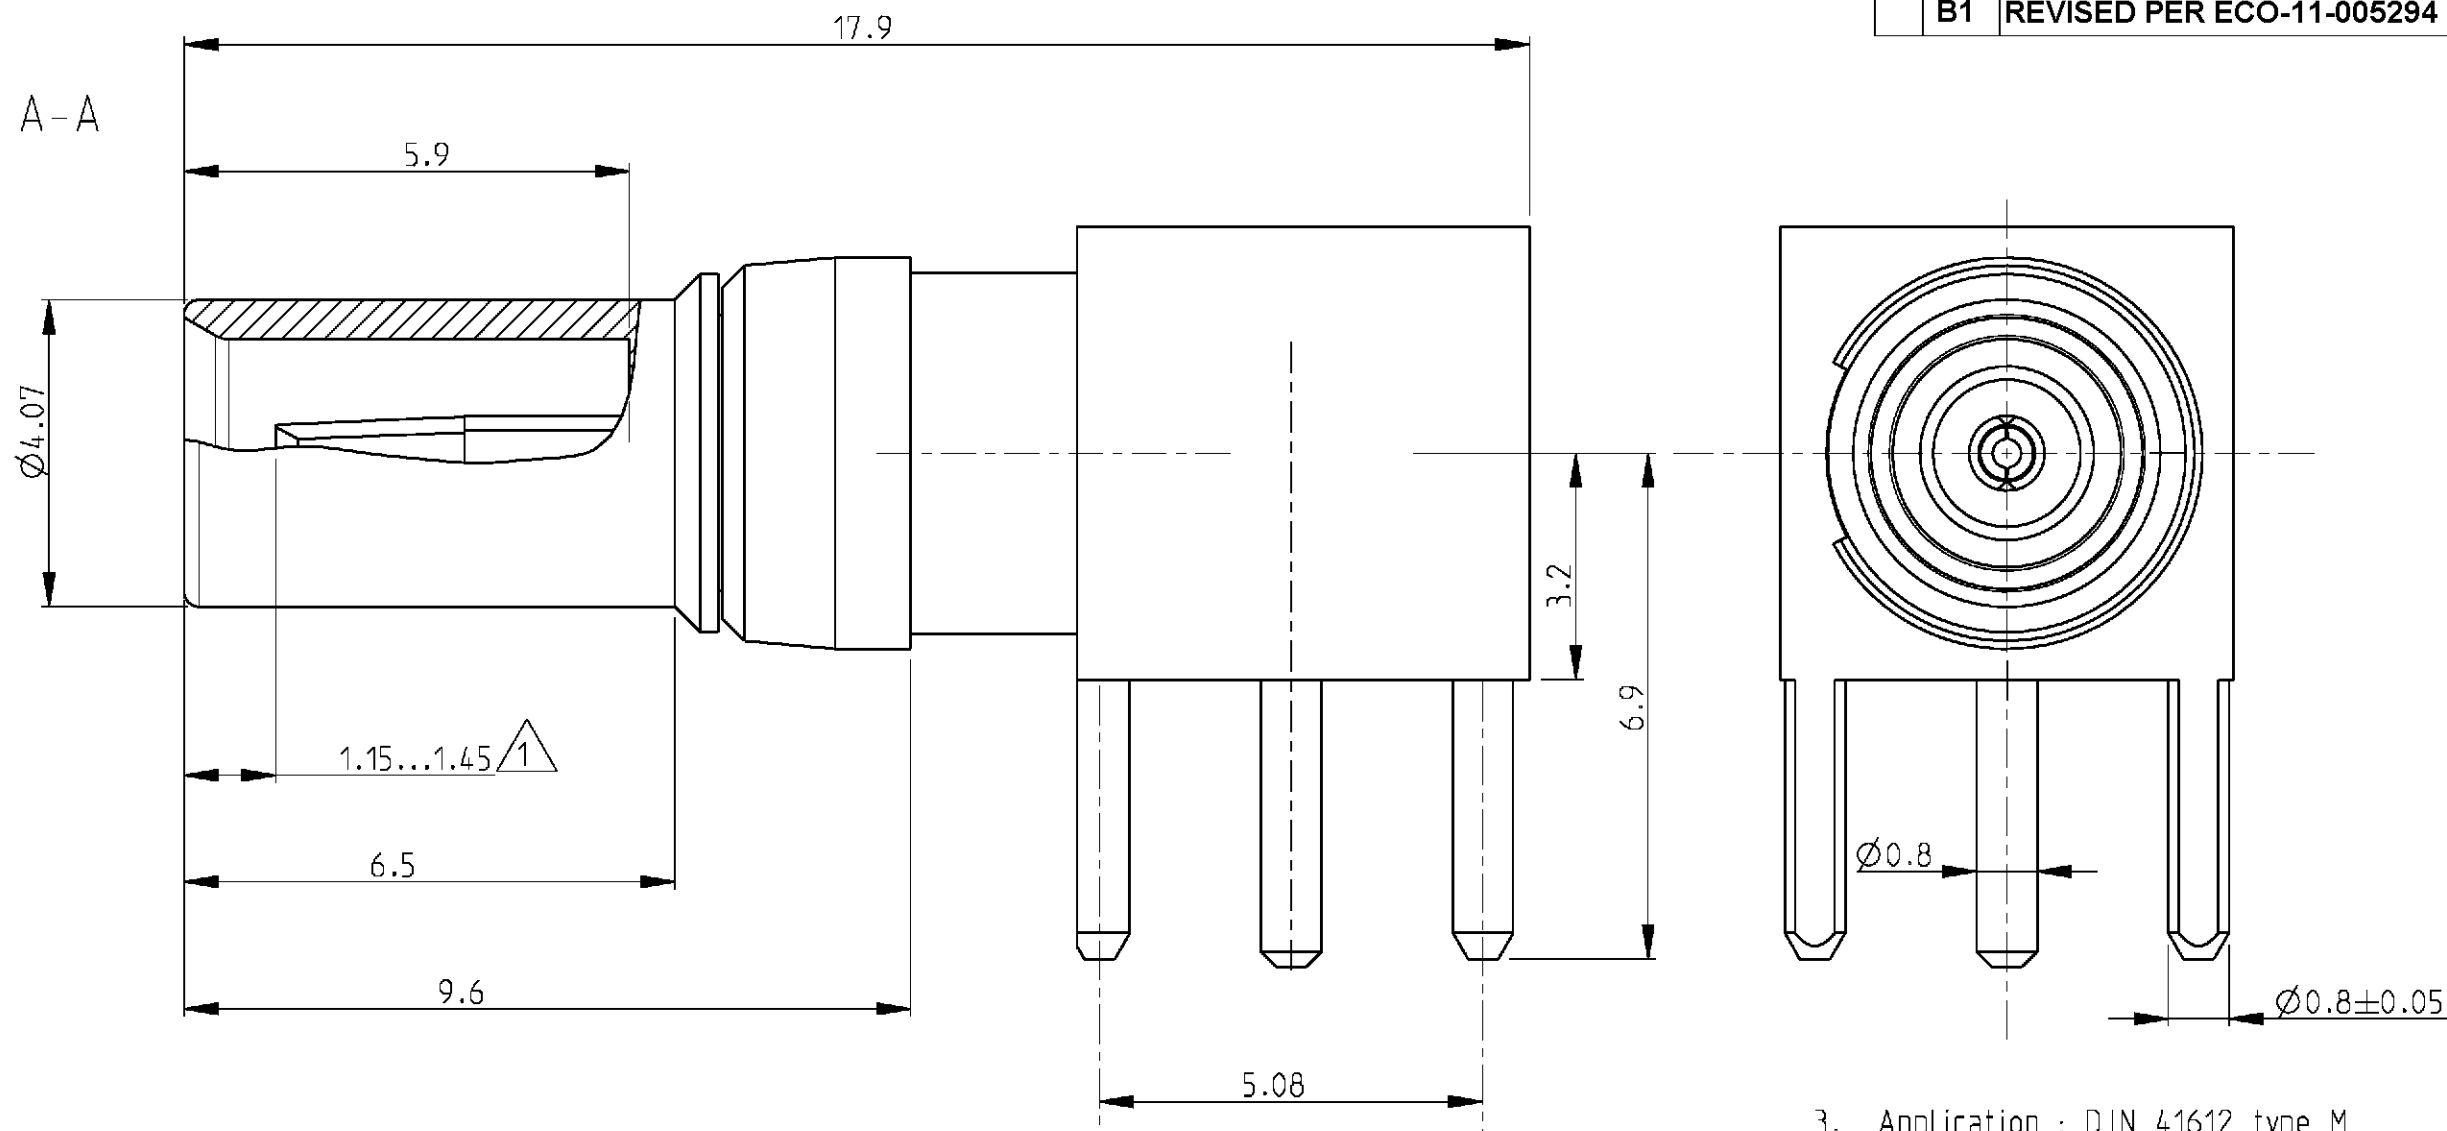


3. Application : DIN 41612 type M
2. Mating face according to DIN 41626 , Part 2

1 Control dimension

All dimensions are max dimensions unless otherwise specified

V23601-A1227-E1	1-1393662-4	Dielectric	PTFE	
		Outer Con.	Brass	1µm Au min in contact area
		Center Con.	Cu Be	1µm Au min in contact area
Old Nr	TE CONNECTIVITY Nr	Description	Material	Plating

		DWN MOROBE 04APR2001		 TE Connectivity			
		CHK MATTHEEUWS 9APR2001					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD LEEMAN 9APR2001		NAME	
		0 PLC ±		PRODUCT SPEC		BULKHEAD ANGLE JACK WITH PCB CONNECTION 1.0/2.3 INSERT 50 Ohm	
		1 PLC ±0.5		108-71032			
		2 PLC ±0.13		APPLICATION SPEC			
		3 PLC ±0.013		-		SIZE	
		4 PLC ±0.0001				CAGE CODE	
		ANGLES ±				DRAWING NO	
MATERIAL -		FINISH -		WEIGHT -		RESTRICTED TO	
						A3 00779 C-1-1393662-4	
						SCALE 10/1	
						SHEET 1 OF 1	
						REV B1	