


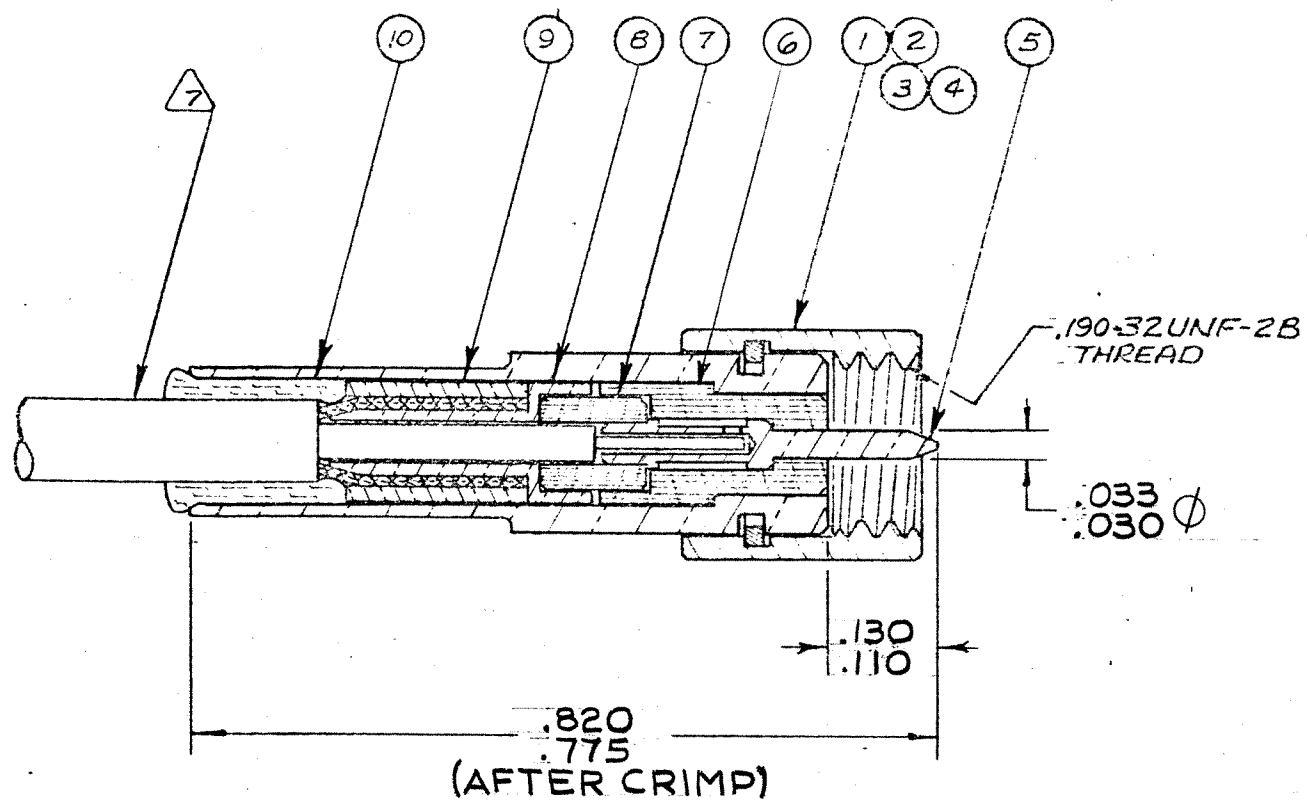

7. CABLE ACCOMMODATION DIMS:
JACKET DIA.----- .088 MAX.
DIELECTRIC DIA.----- .032-.042
INNER CONDUCTOR DIA.--- .009-.019
FOR USE WITH EXTRUDED OR WRAPPED JACKET.

6. FOR ELECTRICAL & MECHANICAL
SPECS. SEE MALCO CATALOG.

5. .016 DIA. WIRE HOLE 3 PLACES

4. DELETED

3. GOLD PLATE PER MIL-G-45204 TYPE II, GR.C, CL. I
2. SEE RF-ASMB-8 ASSY INSTRUCTIONS. SPECIAL TOOL REQ'D:
CONTACT CRIMP: 010-0134-0000 & LOCATOR 001-0104-0000.
ALTERNATE TOOL 010-0065-0000 (NO LOCATOR REQUIRED)
HOUSING CRIMP: 010-0081-0000.

1. THIS CONNECTOR MATES WITH ALL 50Ω
GOLDEN CRIMP, CRIMP SILVER & ALL S-50 JACKS &
RECEPTACLES AS LISTED IN MICRODOT CATALOG.

NOTES: UNLESS OTHERWISE SPECIFIED

TYCO CUSTOMER
DWG 7-1532149-6

					DELETED		11
1	1	1	1	003-0815-0001	SEALING SLEEVE	SILICONE RUBBER MIL-R-5847	10
3	1	1	1	003-0813-0002	MIDDLE SLEEVE	LEADED COPPER	9
3	1	1	1	003-0814-0002	INNER SLEEVE	BRASS, QQ-B-626	8
1	1	1	1	003-0811-0001	CABLE INSULATOR	TEFLON PER L-P-403	7
1	1	1	1	003-1301-0001	BODY INSULATOR	TEFLON PER L-P-403	6
3	1	1	1	003-0807-0002	PIN CONTACT	COPPER ALLOY	5
3	1			003-1299-0004	HOUSING SUB-ASSY NUT-1/4" HEX W/WIRE HOLES		4
3		1		003-1299-0003	HOUSING SUB-ASSY NUT-1/4" HEX		3
3			1	003-1299-0002	HOUSING SUB-ASSY NUT-1/4" KNURL		2
3			1	003-1299-0001	HOUSING SUB-ASSY NUT-1/4" PARTIAL HEX		1
4	3	2	1	COMPONENT	NOMENCLATURE	MAT'L & SPEC.	ITEM

STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED		MALCO A MICRODOT COMPANY, INC. 220 PASADENA AVE., SO. PASADENA, CALIF.	
FRAC. IN.		SURFACE TREATMENT	
ANGLE IN.		NOTED	
ECCENTRICITY		MATERIAL	
MAX. FIL.		NOTED	
HOLE DIA. IN.		APP. R.B.C.	
SURFACE ROUGHNESS		APP. J.L. 7/1/65	
V. MICRO INCHES		CHECKED BY	
THREADS TO MIL-STD-753		DRAWN BY U.M.	
COMMERCIAL TOLERANCES APPLY TO STOCK DIMENSIONS		SCALE	
DATE		DATE	
APP.		DATE	
PLUG ASSEMBLY		PROD. CODE 941	
NON-ENVIRONMENTAL		CODE	
GOLDEN CRIMP 50Ω		CDM 132-0112-000* J	

ASSEMBLY	NO. REV.	REV.	DESCRIPTION	DATE	APP.
J	3849	1	UPDATED REV. LETTER	1/22	92
NEXT ASSY	LET	SCD	REVISION DESCRIPTION	DATE	APP.