
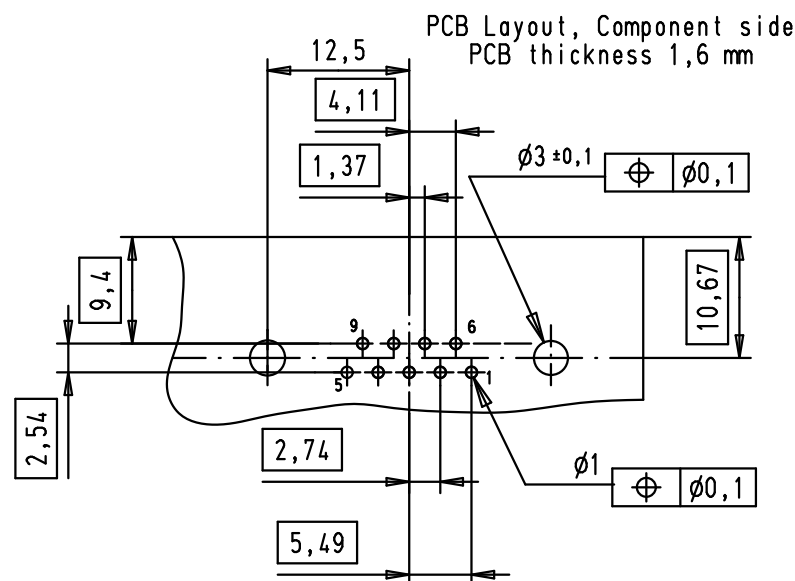
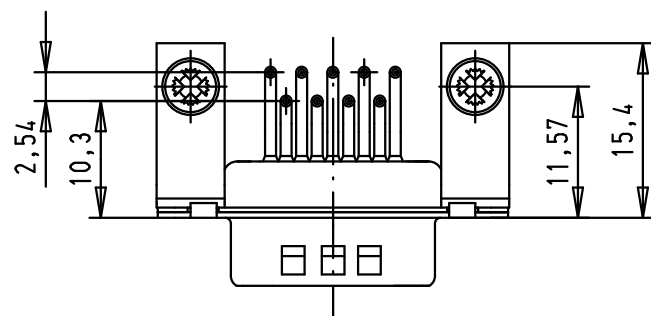



Performance level	PL2
Filter type	C
Capacitance	47pf±20%
Working Voltage	100v
Current rating	7,5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	--
10	--
50	--
100	--
500	30dB
1000	35dB



09641247213	M3
09641247212	4-40UNC-2B
Part number	Nut thread

				Det.	Name		
			Detail.	8-JUL-02	CV		
36283	12/01/12	SD	Insp.	12/01/12	JB		All Dim. in mm
32522	07/02/05	AF	Stand.				Orig. Size DIN A
31576	08/12/03	AF					
31058	8-JUL-02	CV	HARTING EURL F-95972 Paris				
Mod.	Det.	Name					



All Dim. in mm
Orig. Size DIN A 4



D-Sub, male, angled, 9 Poles, with turned solder pin, metal bracket with nut and board lock
--

TB 0964124721x

Sub.

$$\frac{Mo?Mstab}{Scale}$$

1.5:1

Blatt/ Page

1