

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC PA, UL94V-0, BLACK.

TERMINAL: BRIGHT TIN PLATED, COPPER ALLOY.

SCREW: 6-32, STEEL, ZINC PLATED CLEAR CHROMATE.

ELECTRICAL:

UL CLASS C: 20A, 150V.

UL CLASS D: 10A, 300V.

CSA TYPE B: 20A, 300V.

CSA TYPE C: 20A, 300V.

CSA TYPE D: 10A, 300V.

CSA TYPE E: 20A, 300V.

WIRE RANGE: 12-22 AWG

MECHANICAL:

MAXIMUM TORQUE RATING: 7 IN-LBS.

RUNNING TORQUE: 0.5-3.5 IN-LBS UNLESS

OTHERWISE STATED.

1 SCREWS ARE BOTTOMED, NO THREAD INTERRUPT.

△₂ SCREWS ARE NICKEL PLATED BRASS.

△₃ SCREWS ARE CAPTIVE.

4 SEE FIGURE.







5 PRELIMINARY PART NUMBER.

6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER
D.RENAUD/D.SINISI


△ 7 TERMINAL FINISH: MATTE TIN

 OBSOLETE

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			N8	DIM .265 ADDED; DRAWING UPDATED	25NOV2014	PS	JK

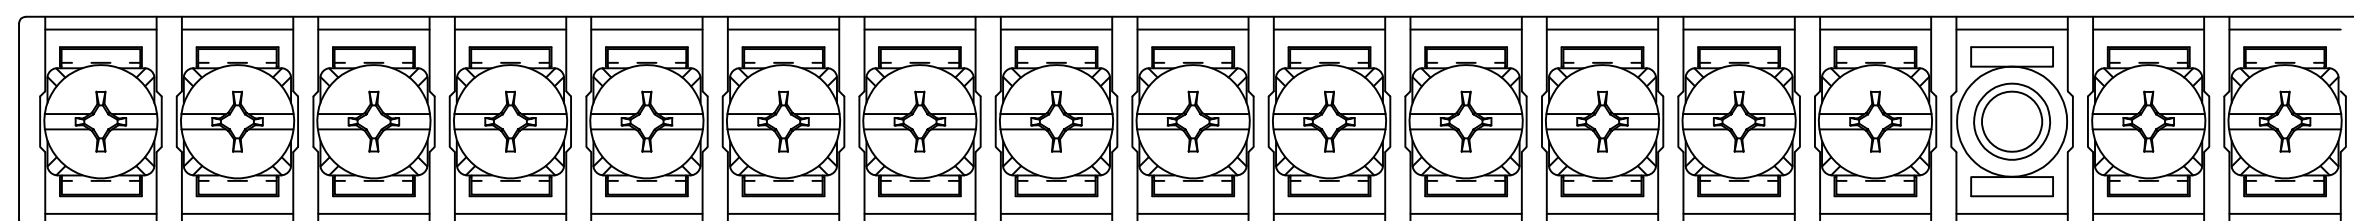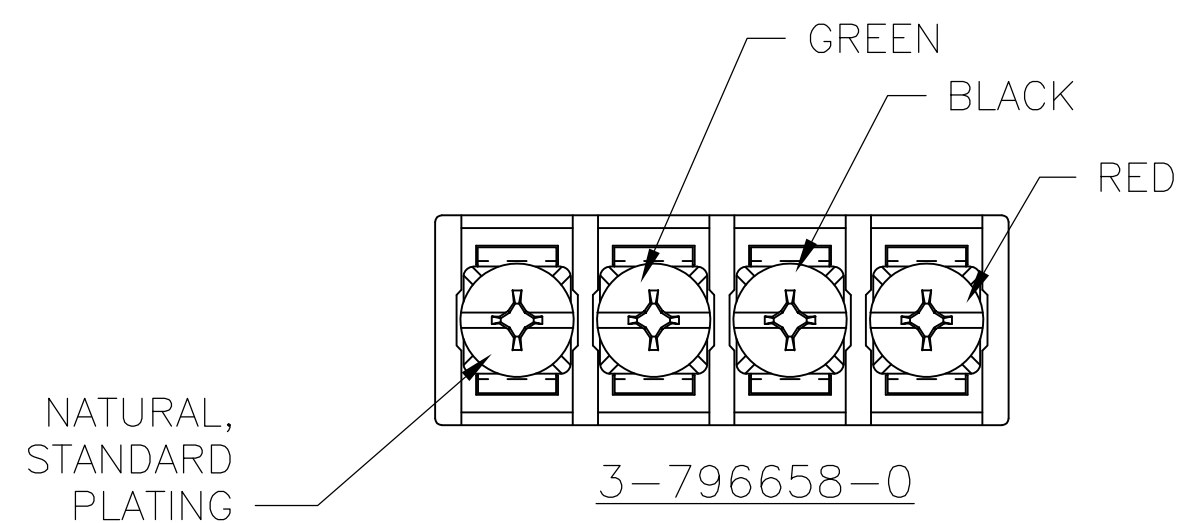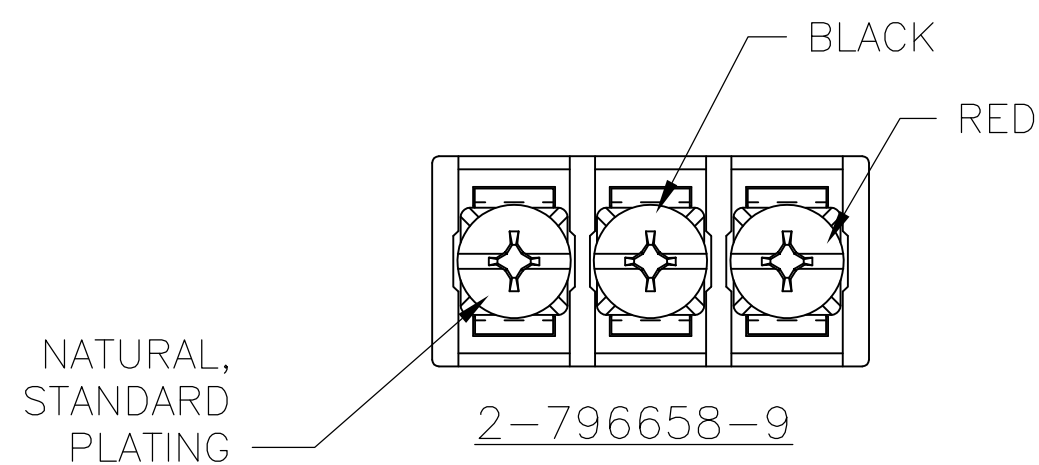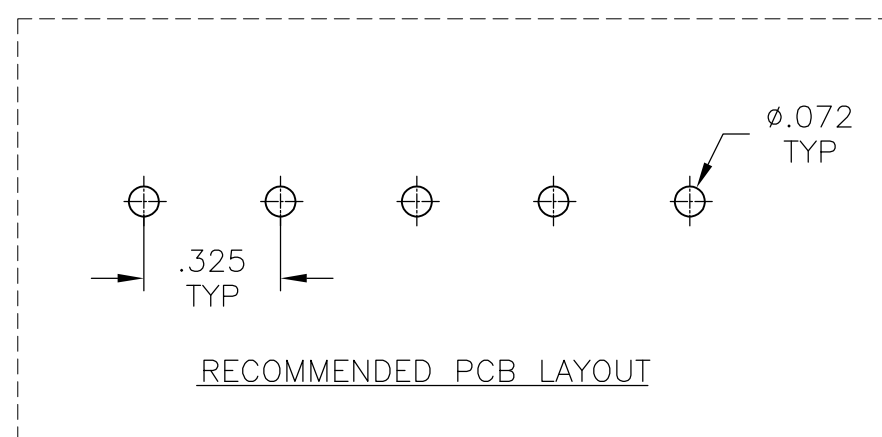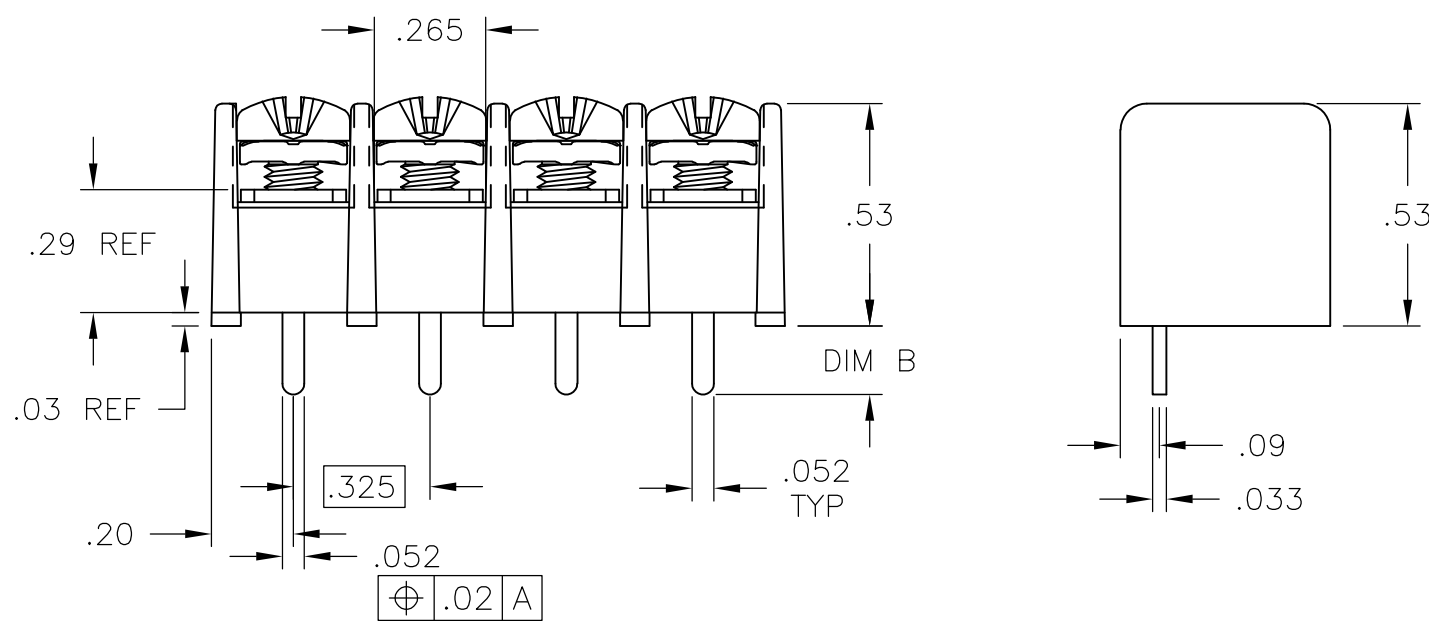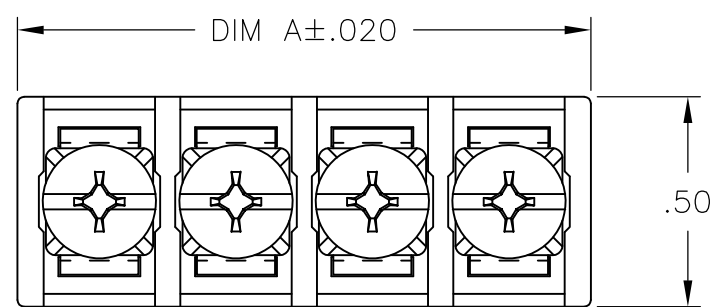

DIM B		CATALOG NUMBER	DIM A	NO OF POS.	PART NUMBER
8	5	.160 4DB-P108-04-SPCL	1.365	4	3-796658-0
8	5	.160 4DB-P108-03-SPCL	1.040	3	2-796658-9
8		.160 4DB-P108-30	9.815	30	5-1437667-5
8		.160 4DB-P108-29	9.490	29	796658-9
8		.160 4DB-P108-28	9.165	28	5-1437667-3
8		.160 4DB-P108-27	8.840	27	796658-8
8		.160 4DB-P108-26	8.515	26	5-1437667-2
8		.160 4DB-P108-25	8.190	25	796658-7
8		.160 4DB-P108-24	7.865	24	5-1437667-0
8		.160 4DB-P108-23	7.540	23	796658-6
8		.160 4DB-P108-22	7.215	22	4-1437667-8
8		.160 4DB-P108-21	6.890	21	796658-2
8		.160 4DB-P108-20	6.565	20	4-1437667-6
8		.160 4DB-P108-19	6.240	19	4-1437667-5
8		.160 4DB-P108-18	5.915	18	4-1437667-4
8	5	4 .160 4DB-P108-16-105	5.590	17	2-796628-4
8		.160 4DB-P108-17	5.590	17	4-1437667-2
8		.160 4DB-P108-16	5.265	16	4-1437667-0
8		.160 4DB-P108-15	4.940	15	3-1437667-9
2	1	.160 4DB-P108-14-102	4.615	14	2-796658-5
2		.160 4DB-P108-14-102	4.615	14	2-796658-3
		.160 4DB-P108-14	4.615	14	3-1437667-8
		.160 4DB-P108-13	4.290	13	3-1437667-7
		.160 4DB-P108-12	3.965	12	3-1437667-6
		.160 4DB-P108-11	3.640	11	3-1437667-5
		.160 4DB-P108-10	3.315	10	3-1437667-3
8	5	2 .160 4DB-P106-09-094	2.990	9	1-796658-7
		.160 4DB-P108-09	2.990	9	3-1437667-2
6	1	OBSOLETE .160 4DB-P108-08-091	2.665	8	1-796658-4
		.160 4DB-P108-08	2.665	8	3-1437667-1
8	5	3 2 .160 4DB-P106-07-100	2.340	7	2-796658-2
		.160 4DB-P106-07-093	2.340	7	1-796658-6
		.160 4DB-P108-07	2.340	7	3-1437667-0
8	5	3 2 .160 4DB-P106-06-099	2.015	6	2-796658-1
6	1	OBSOLETE .160 4DB-P108-06-090	2.015	6	1-796658-3
8	5	.200 4DB-P108-06	2.015	6	2-796658-6
		.160 4DB-P108-06	2.015	6	2-1437667-9
8	5	3 2 .160 4DB-P106-05-098	1.690	5	2-796658-0
6	4	OBSOLETE .160 4DB-P108-05-093	1.690	5	1-796658-5
		.160 4DB-P108-05	1.690	5	2-1437667-8
8	5	3 2 .160 4DB-P106-04-097	1.365	4	1-796658-9
1		.160 4DB-P108-04-089	1.365	4	1-796658-2
		.160 4DB-P108-04	1.365	4	2-1437667-6
8	5	3 2 .160 4DB-P106-03-096	1.040	3	1-796658-8
6	1	.160 4DB-P108-03-088	1.040	3	1-796658-1
		.160 4DB-P108-03	1.040	3	2-1437667-5
7		.142 4DB-P108-02-143	.715	2	2-796658-8
		.142 4DB-P108-02-142	.715	2	2-796658-7
		.160 4DB-P108-02	.715	2	2-1437667-4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S WELDON 01MAY2003		 TE Connectivity			
		CHK S YODER 5/1/03					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ASSEMBLY, DUAL BARRIER 4DB P108 XX			
		APVD S YODER 5/1/03					
		PRODUCT SPEC —					
		APPLICATION SPEC —					
		MATERIAL —		FINISH —		WEIGHT —	
		CUSTOMER DRAWING		SIZE A2	CAGE CODE 00779	DRAWING NO C-2-1437667-4	RESTRICTED TO —
				SCALE NTS	SHEET 1 of 1	REV N8	