
## SPECIFICATION CONTROL DRAWING

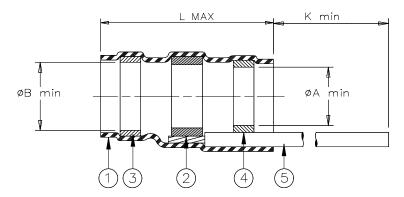

Product Revision		Product Dimensions				Cable Dimensions				
Product Name		L	øA	øB	K	øD	øE	øF	øG	J±0.5
		max	min	min	min	max	min	min	max	(J±0.02)
B-003-00	K	16.5	2.6	3.1	150	2.6	1.6	1.5	3.1	7
		(0.650)	(0.100)	(0.120)	(5.900)	(0.100)	(0.063)	(0.060)	(0.120)	(0.275)
B-003-01	J	16.5	4.4	4.9	150	4.4	2.2	2.1	4.9	7
		(0.650)	(0.175)	(0.195)	(5.900)	(0.175)	(0.085)	(0.080)	(0.195)	(0.275)
B-003-02	L	21.5	6.9	7.4	150	6.9	3.4	3.2	7.4	7
		(0.845)	(0.270)	(0.290)	(5.900)	(0.270)	(0.135)	(0.125)	(0.290)	(0.275)

## **MATERIALS**

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked polyvinylidene fluoride.
- 2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Cd18 per ANSI-J-STD-006.


FLUX: TYPE ROL1 per ANSI-J-STD-004.

- 3. MELTABLE INSERT: Thermally stabilized thermoplastic. Color: blue.
- 4. MELTABLE INSERT: Thermally stabilized thermoplastic. Color: clear.
- GROUND LEAD: RAYCHEM 55A0111-24 in accordance with MIL-W-22759/32 AWG 24 stranded tin plated copper. Color: blue.

## **APPLICATION**

- 1. These parts are designed to provide an environment protected shield termination on cables, rated for 105°C minimum, meeting the dimensional criteria listed, and having tin or silverplated shields.
- Install using Raychem-approved convection or infrared heating tools in accordance with Raychem installation procedure RPIP-709-00.
- 3.Temperature range: -55°C to +125°C.

For best results, prepare the cable as shown:



\* A trademark of Raychem Corporation.

Rayo	chem		DEVICES 30		Corporation titution Drive rk, CA 94025	TITLE:	TITLE: SOLDERSLEEVE* DEVICE WITH PRE-INSTALLED LEAD LOW TEMPERATURE			
	THERWISE SP IMENSIONS AI				DOCUMEN	DOCUMENT NO: B-003-0X				
TOLERAN 0.00 N/A 0.0 N/A 0 N/A		ES: N/A HNESS IN ON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			DCR NUME	BER: 0980560	REPLACES: B0030X		
	DRAWN BY:		DATE:		PROD. REV.	DOC ISSUE:	SCALE:	SIZE:	SHEET:	
f this dealers	M. FORONDA		06/23/98		SEE TABLE	3	None	Α	1 of 1	