

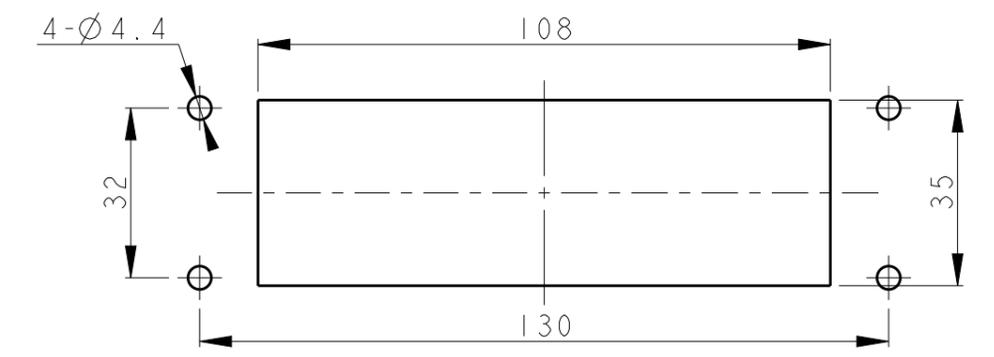
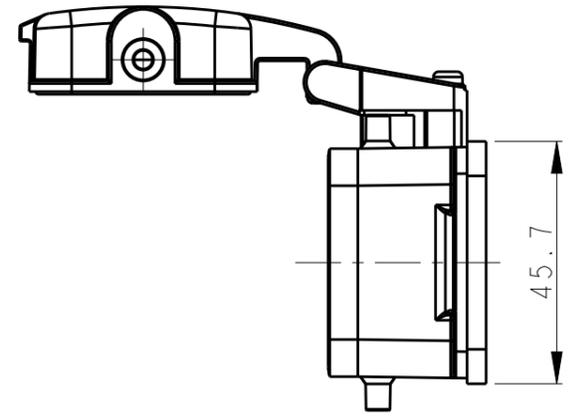
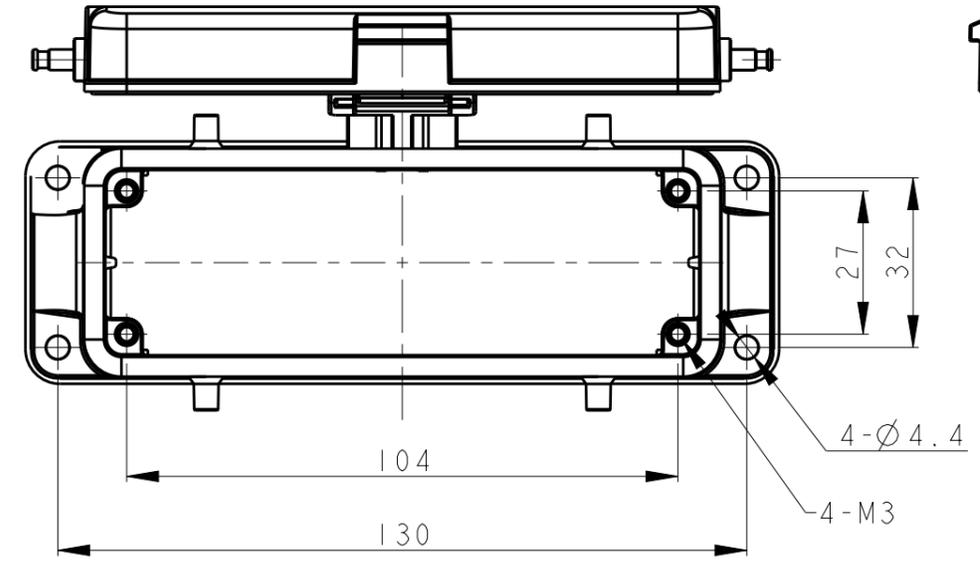


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	15JUN2015	DL	CW

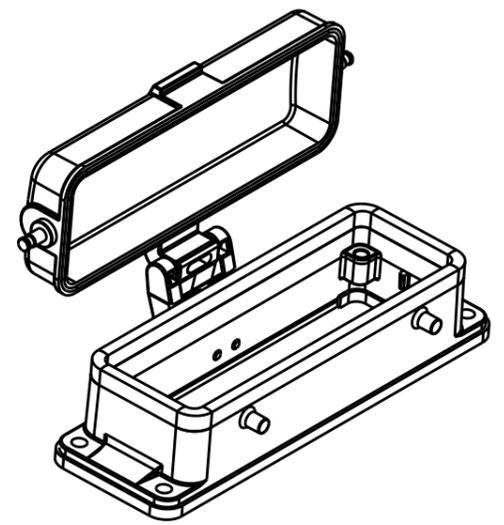

开孔安装示意图  
PANNEL CUT OUT

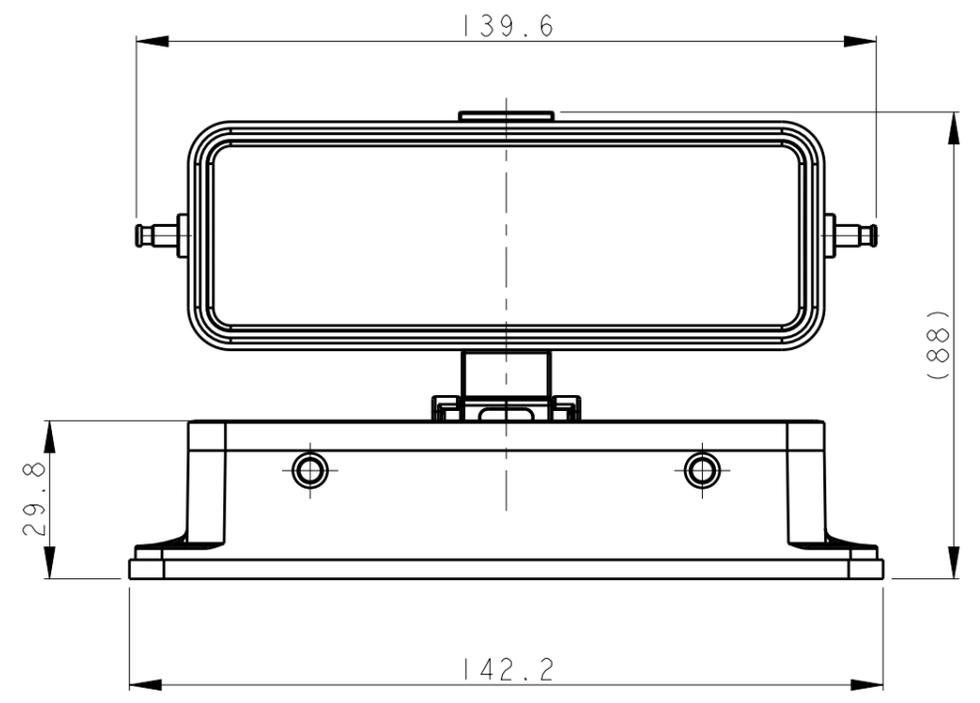

SCALE 1:2

NOTES:  
 1. TECHNICAL CHARACTERISTICS:  
 BODY MATERIAL: DIE CAST ALUMINIUM ALLOY  
 SURFACE TREATMENT: POWDER-COATED, COLOR SEE TABLE  
 OPERATION TEMPERATURE: -40-+125°C  
 DEGREE OF PROTECTION: IP65 (MATED)

注释:  
 1. 技术参数:  
 主体材料: 铝合金  
 表面处理: 粉末喷涂, 颜色见表格  
 工作温度: -40-+125°C  
 防护等级: IP65(配合)

T1430241000-000	H24B-ADM-BO	GRAY	-
T1430241000-100			BODY COATED BOTH INSIDE AND OUTSIDE
T1430241000-200			BODY AND COVER COATED BOTH INSIDE AND OUTSIDE
T1433240000-000			BODY AND COVER COATED, RED
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	COLOR	REMARK

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±-
	1 PLC ±-
	2 PLC ±-
	3 PLC ±-
	4 PLC ±-
	ANGLES ±-
MATERIAL	FINISH
-	-
-	-

DWN	DAVID LI	15JUN2015
CHK	CHRIS WANG	15JUN2015
APVD	XU XIANG	15JUN2015
PRODUCT SPEC	108-137013	
APPLICATION SPEC	114-137013	
WEIGHT	-	
Customer Drawing		

**STE** TE Connectivity

NAME: H24B-ADM-BO

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	©-T143X24X000X00	-

SCALE 3:4 SHEET 1 OF 1 REV A