


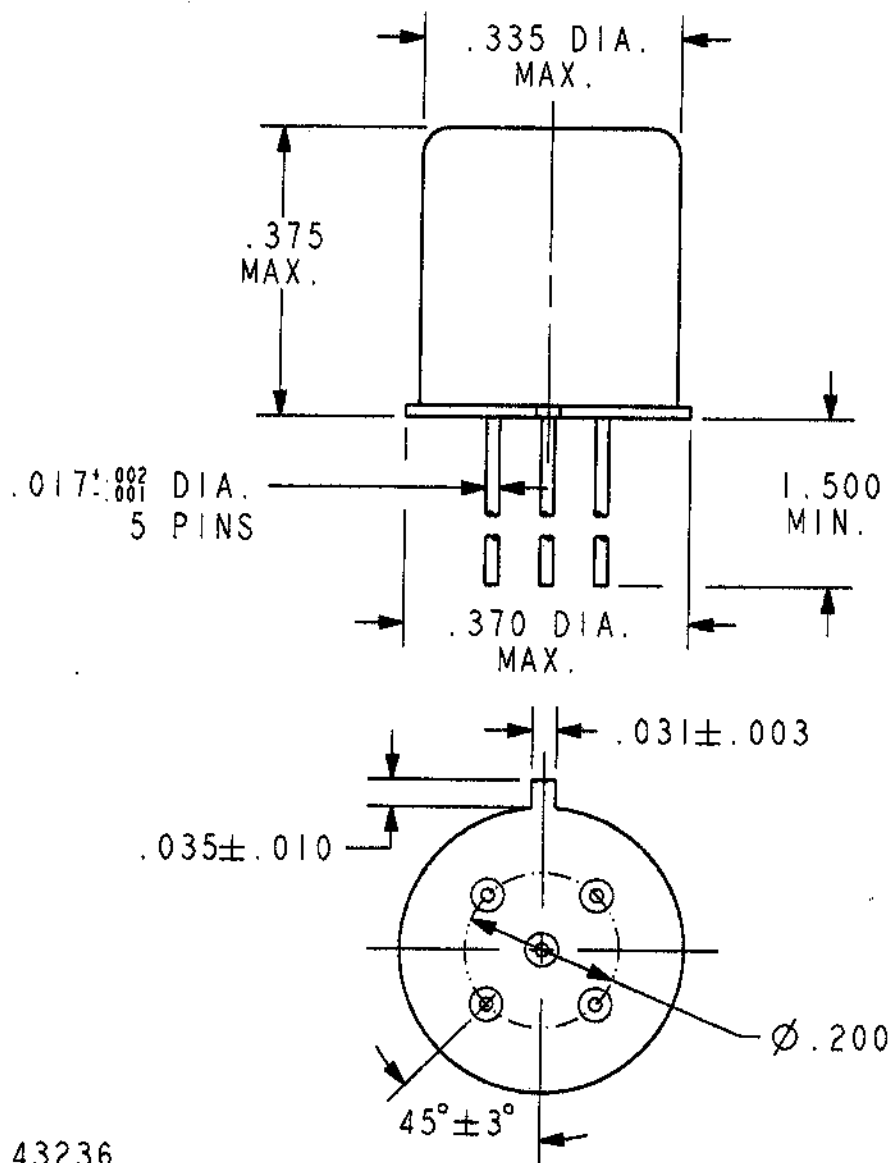

REV. 0

DCO 143236

COIL: @ 25°C

RESISTANCE $125 \text{ OHMS} \pm 10\%$

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.8 VDC

MUST RELEASE $1.7 \text{ VDC MAX, } 0.23 \text{ VDC MIN.}$

ENVIRONMENT:

VIBRATION $10 \text{ CPS TO } 3000 \text{ CPS @ } 30 \text{ g's}$

SHOCK $75 \text{ g's } 6 \text{ MS. DURATION}$


TEMPERATURE $-65^\circ\text{C TO } +125^\circ\text{C}$

NOTES: OPERATE TIME 4.0 MS MAX.

RELEASE TIME 7.5 MS MAX.

CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: $\text{LOW LEVEL TO } 1\text{A}$
 $28 \text{ VDC RESISTIVE } 100,000 \text{ OPERATIONS}$

DR. B.D. 9/27/01

9/27/01

CII Technologies
 advanced control electronic solutions

CUST. QPL

CUST. NO. M39016/25-017M REV.

"JIMSD" RELAY

JIMSWD-5XM