


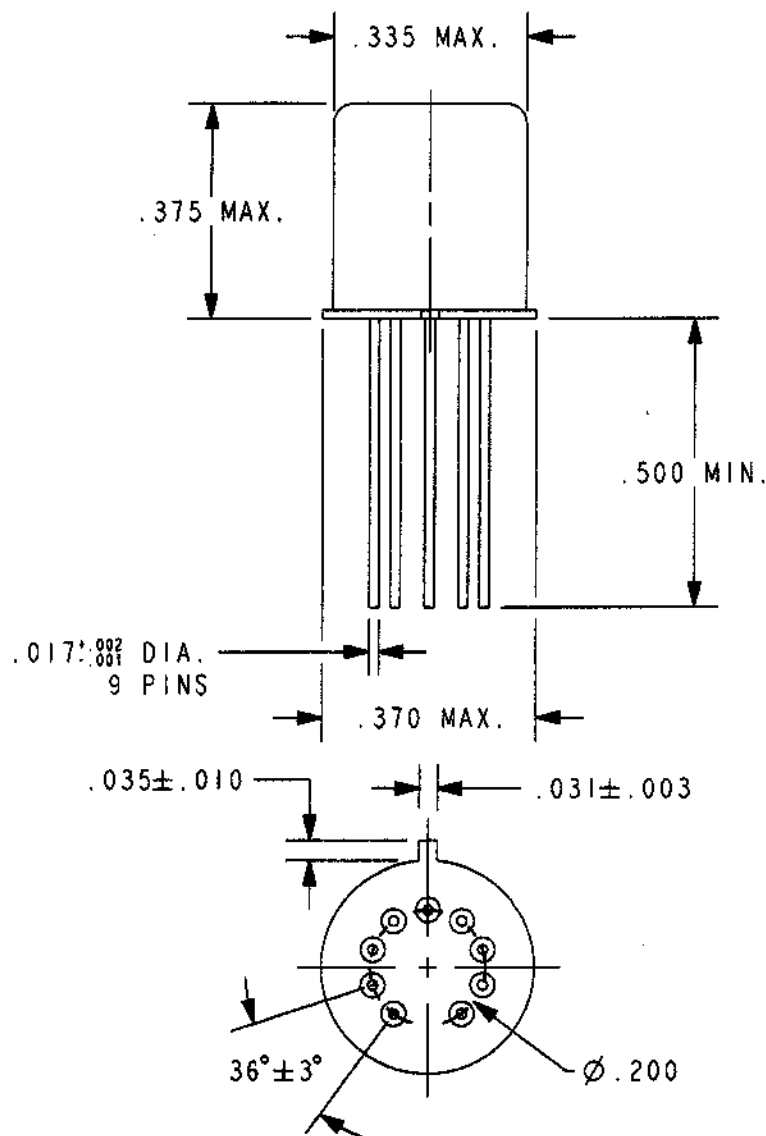

REV. 0

DCO 142958

COIL: @ 25°C

RESISTANCE

3300 OHMS ±10%

NOMINAL VOLTAGE

26.5 VDC

MUST OPERATE

14.2 VDC

TURN -ON BASE CURRENT

0.06 mADC

MUST RELEASE

8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C


NOTES:

TURN-ON TIME 4.0 MS MAX

TURN-OFF TIME 7.5 MS MAX

CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 5/31/01

CR. 5/31/01

CII Technologies
advanced control electronic solutions

CUST. OPL

CUST. NO. M28776/3-038P REV.

JMST RELAY

JMSCT-26XP