


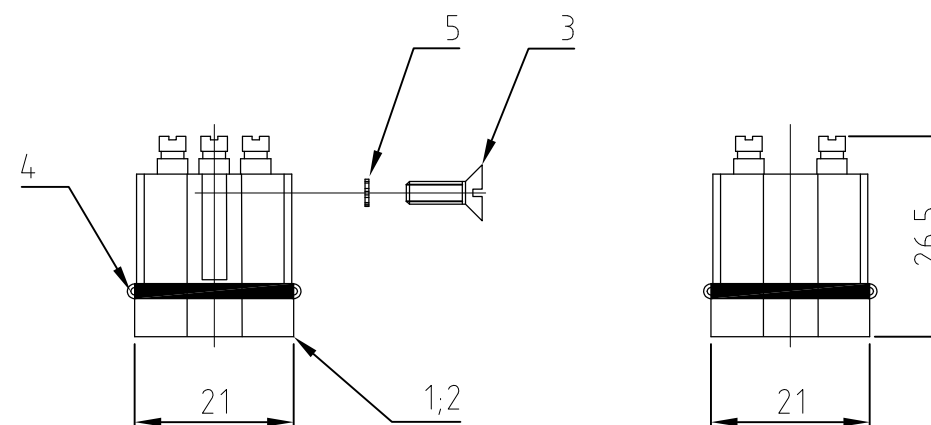

Kontaktanordnung
Contact arrangement


1	2	3
•	•	•
•	•	•
4	5	6

Notes,

△ 1 Material: insert, PC
Neoprene

△ Packaging quantity
10 pieces

 special Packing

OBSOLETE		OBSOLETE													
1	1	1	1	Serrated lock washer				steel	zinc plated	5					
1	1	1	1	seal				Neoprene	black	4					
1	1	1	1	sheet metal screw				Stahl/stee	zinc plated	3	B2.9x9.5				
1	-	1	-	pin insert STA.6					light beige	2					
-	1	-	1	pin insert screw STA.6					light beige	1					
3-2	0-1	3-1	1-1	DESCRIPTION / BENENNUNG				MATERIAL	COLOR / FARBE	ITEM NO. POS.	REMARKS / BEMERKUNGEN				
STA.6.Sti.L.Au	STA.6.Sti.S.KM	STA.6.Sti.L	STA.6.Sti.S	ORDERING TEXT / BESTELLTEXT				THIS DRAWING IS A CONTROLLED DOCUMENT. DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.							
1				DIMENSIONS: MASSENEHEITEN: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN		DWN 26.03.2001 SCHNEIDER		TE TE Connectivity PIN-INSERT STA.6.STI.S/L					
						0 PLC ± 0.15 1 PLC ± 0.1 2 PLC ± 0.1 3 PLC ± 0.1 4 PLC ± 0.1		APVD -						NAME	
						ANGLES / WINKEL ± -		PRODUCT SPEC PRODUKTSPEZ.							
						FINISH / OBERFLÄCHE / FARBE		APPLICATION SPEC VERARBEITUNGSSPEZ.							
						MATERIAL								WEIGHT GEWICHT	
				1		-		A3		00779		C-1103501			
				CUSTOMER DRAWING / KUNDENZEICHNUNG				SCALE MASSSTAB 1:1		SHEET BLATT 1 OF 1		REV A6			