


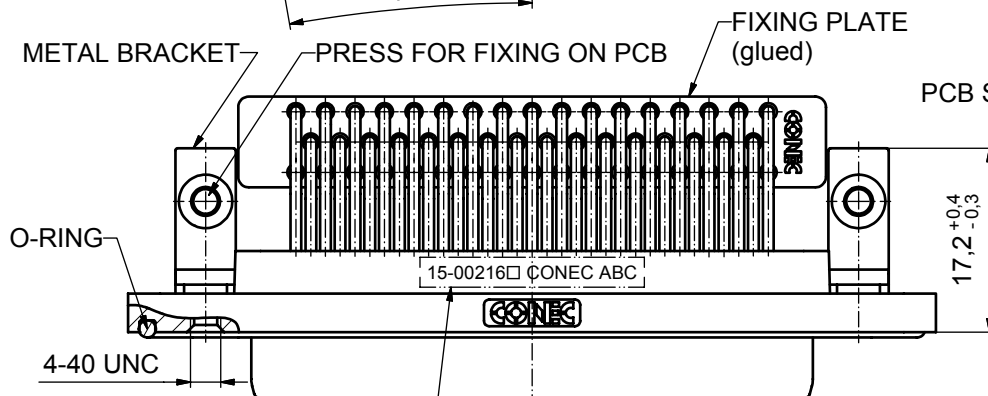
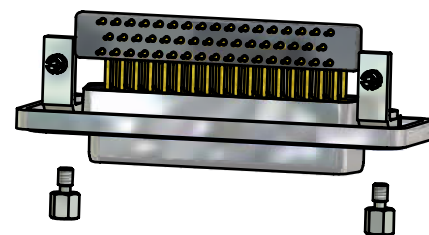


16. CONNECTOR IS PART MARKED: 15-00216 CONEC ABC

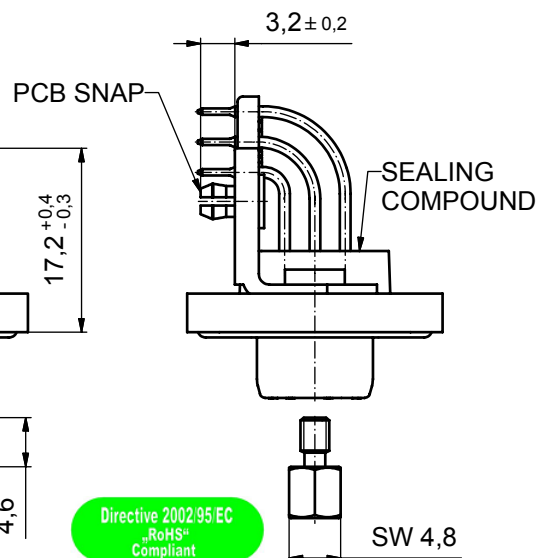

AT ALL TIMES WATER RESISTANT CONNECTORS
NOT IN USE SHOULD BE COVERED
WITH A CONEC WATER RESISTANT CAP
OR WATER TIGHT HOOD.




SW 4.8


scale:	2:1 (4:1)	
material:	see notes	
title:		
D-SUB FEMALE 90°		
50pos. SOLDER PIN ANGLED		
metal bracket, fixing plate, hexlocking screw, snap		
dwg no:	Inventor 10	DIN-
		A3
	15K1A470	sh: 1
part no:	15_00216 □ (see note 2)	

P.C.B. HOLE DRILLINGS

(P.C.B. TOP SIDE)

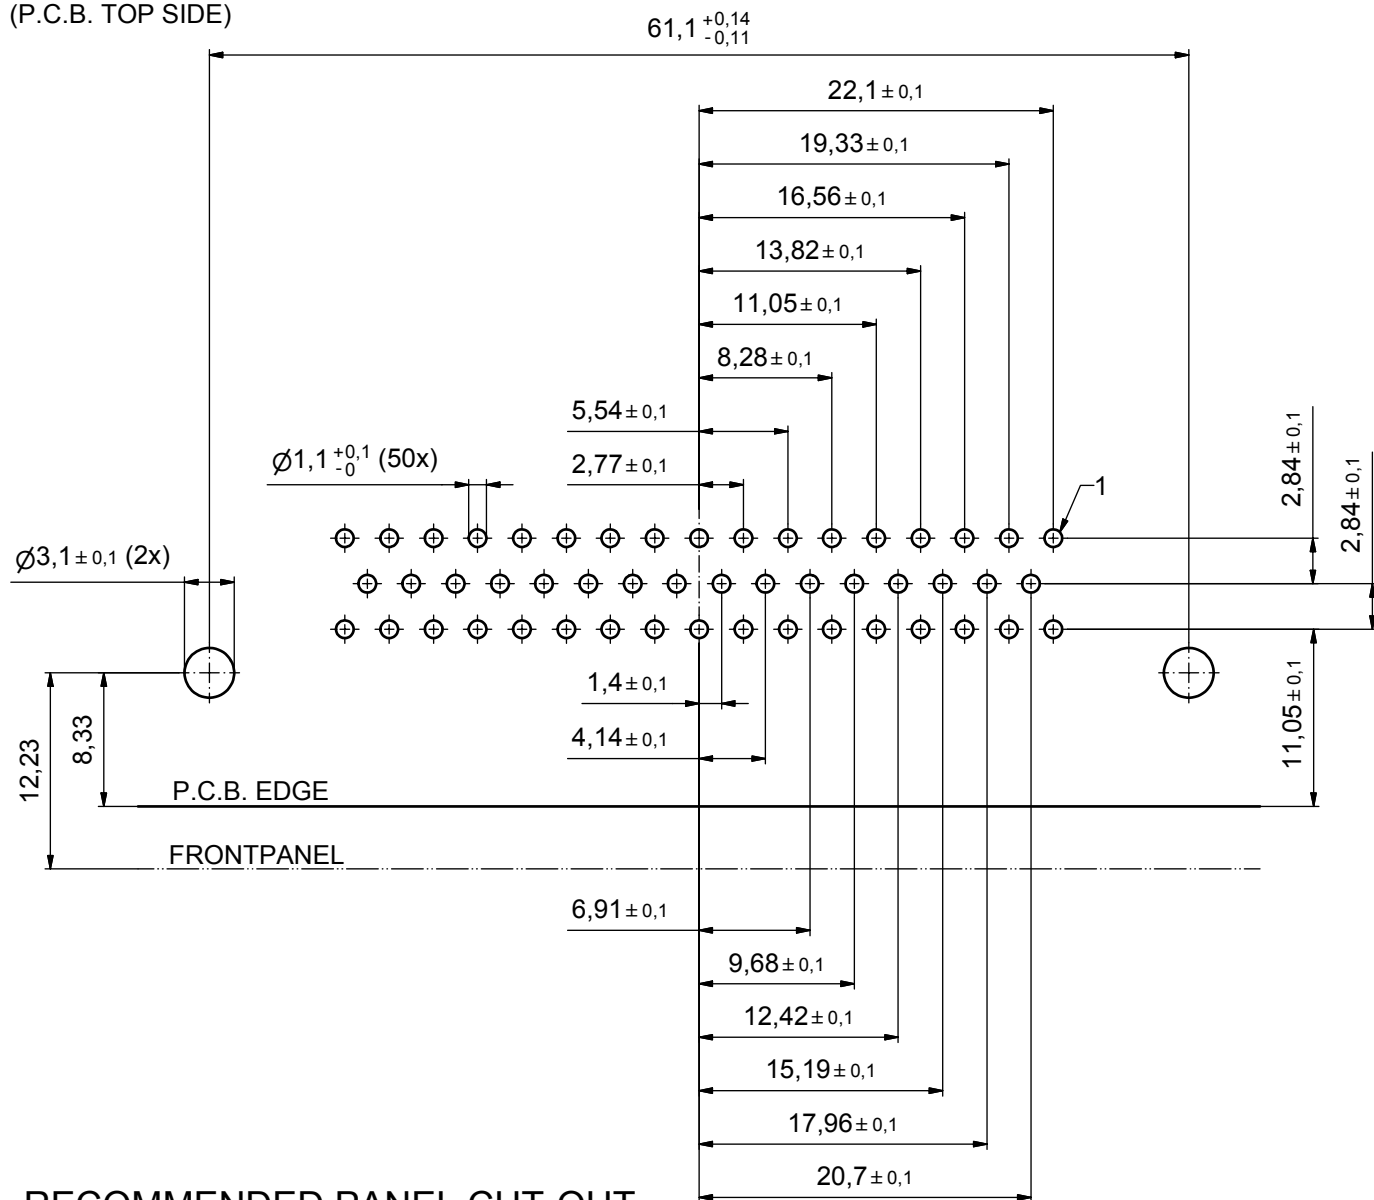

RECOMMENDED PANEL CUT-OUT

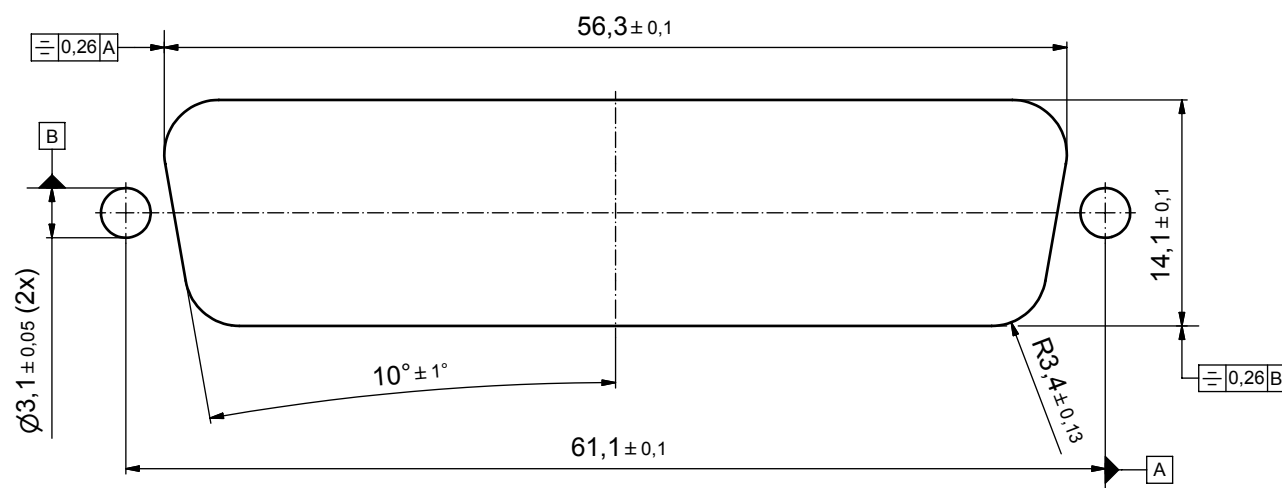

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		
dim. in mm		
drawn	09.11.09	Schmidt
appd.	08.12.09	Fischer
norm		
d-old		

scale:	3:1
material:	see sheet 1
title:	
P.C.B. HOLE DRILLINGS	
PANEL CUT-OUT	
D-SUB Female 50pos. Solder pin angled 90°	
dwg no:	Inventor 10
15K1A470	
part no:	see sheet 1
DIN-A3	
sh: 2	