
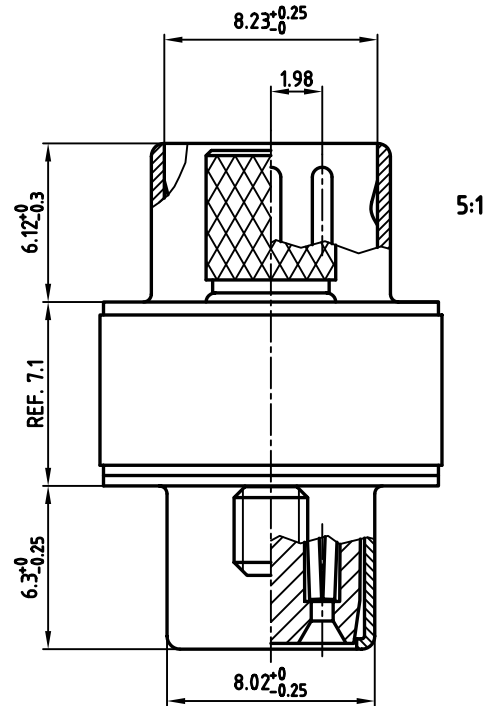

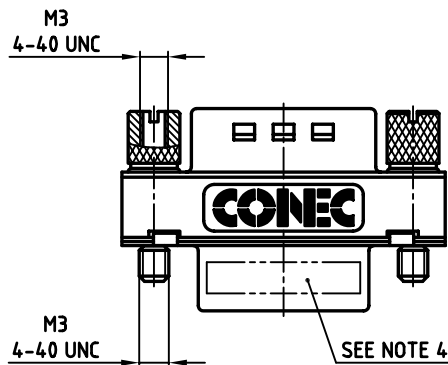
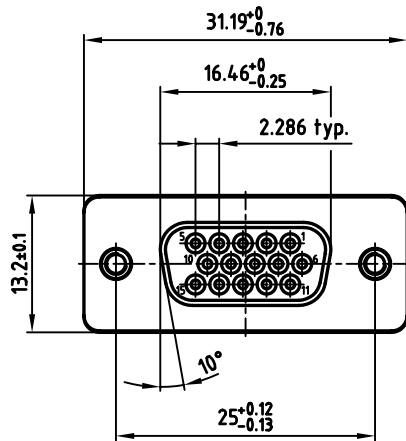


used for: D-SUB HD FILTER ADAPTER

		PART NO.	
FILTER	CAPACITANCE	M3	4-40 UNC
TYPE 1	180pF±20%	243811720X	243811600X
TYPE 3	370pF±20%	243811760X	243811640X
TYPE 4	830pF±20%	243811800X	243811680X

**NOTES:**

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: § USE A FOR QUALITY CLASS 3 (8µin HARD GOLD OVER min. 50µin NICKEL)
§ USE B FOR QUALITY CLASS 2 (20µin HARD GOLD OVER min. 50µin NICKEL)
§ USE C FOR QUALITY CLASS 1 (30µin HARD GOLD OVER min. 50µin NICKEL)
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

Directive 2002/95 EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL	APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL	APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

tolerance		dim. in mm	scale: 2:1 (5:1)
1997		date	name
drawn		28.01.	Barcinski
appd.		28.01.	Mickenbecker
norm		DIN 41652	
d-old			
1 x b		Ä 2535	18.07.2006 Lehmen
a		Origin	
rev.		description	date name
scale:		2:1 (5:1)	
material:		SEE NOTES	
title:		D-SUB HD FILTER ADAPTER 15pos.	
dwg no:		AutoCAD 2006	DIN-A
part no:		24K11P7A	3
			sh: 1/1
part no:		SEE TABLE	

CONEC®