


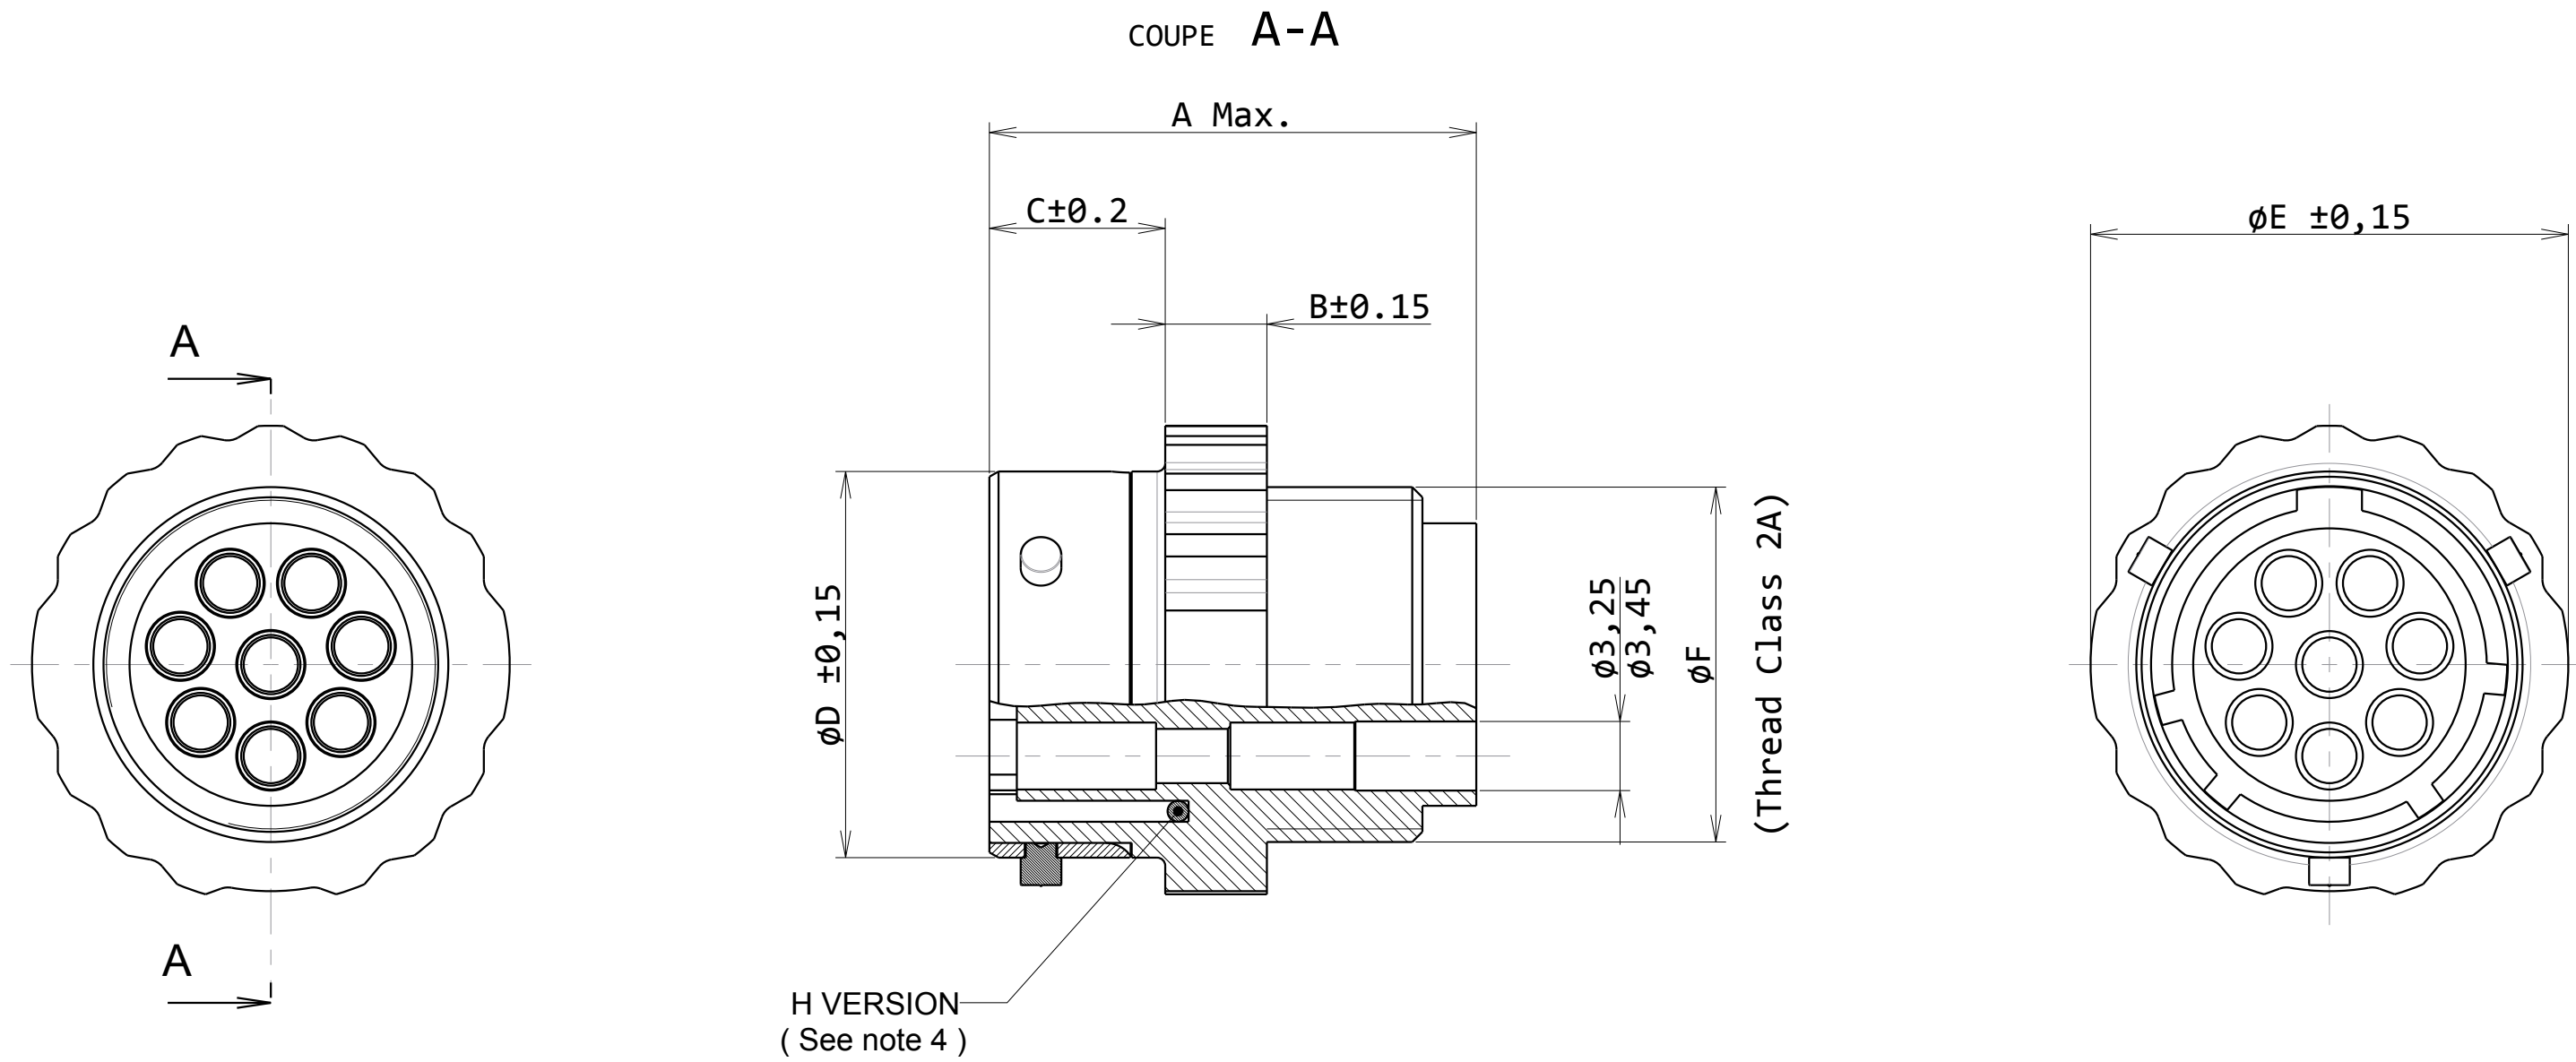

MATERIAL :

- _ BODY : GLASS FILLED POLYESTER UL94-V0 COLOUR BLACK
- _ TRILOK RING : HIGH STRENGTH CuZn ALLOY, NICKEL PLATED

PERFORMANCE CHARACTERISTICS :

- _ OPERATING TEMPERATURE : -55°C TO 125°C
- _ INSULATION RESISTANCE : 5000 MΩ MIN
- _ TEST POTENTIAL : 2000 V EFF

NOTES :

- CONNECTOR ACCEPTS #16 STRIP FORMED SOCKET, MACHINED SOCKET AND SUBMINIATURE COAXIAL PIN AND SOCKET CONTACTS
- CONTACTS TO BE ORDERED SEPARATELY : REFER TO TRIM-TRIO CATALOG
- FOR LAYOUT IDENTIFICATION SEE BS,C,201458,000
- FOR WATERPROTECTED VERSION : ADD "H" TO THE CAT. NO. E.G. CAT.NUMBER: UTG1128SH

P/N : SEE TABLE

B		24/02/2015		_ Adding value øF thread diameter		—	
ISS		DATE		Latest modification - by: COUTY L.		MOD N°	
Designed by:		BUEDS M.		Date:07/06/1991		CUSTOMER DRAWING	
TITLE		FEMALE RECEPTABLE FREE HANGING					
Scale				General linear Tolerances: ± 0,2		NPRDS / PROJECT BE150902A	
1/1							
SOURIAU		WWW.SOURIAU.COM				This document is the property of SOURIAU It must not be reproduced or communicated without permission	
FORMAT		SOURIAU DRG N° BSA201458006					SHEET 1 / 1
A2							NOT EXPORT CONTROLLED