
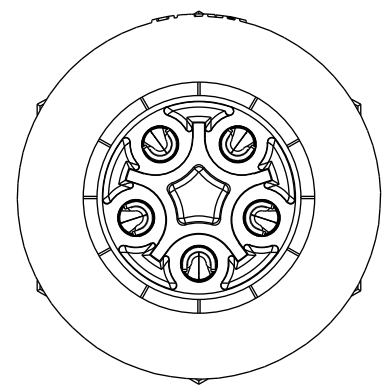
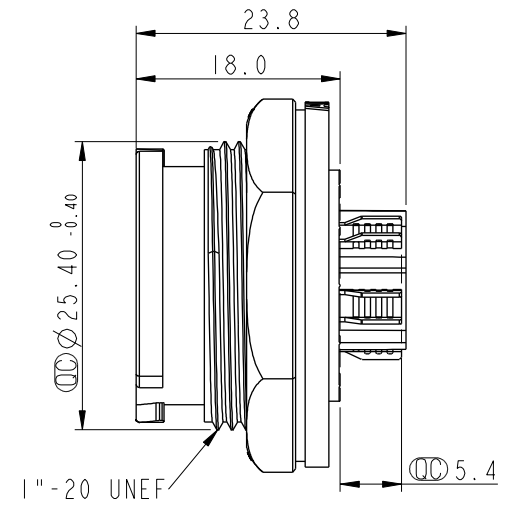




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016/05/18	Wes	Change Rev.01 To Rev.A
B	C190403	2019/03/12	Vicky	Change Note

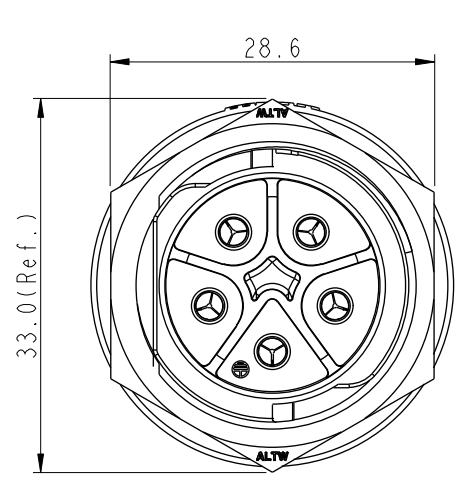


ALTW
CONFIDENTIAL
2019-03-12
R&D DEPT.

White Printing

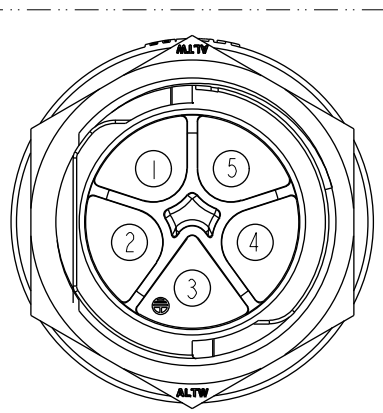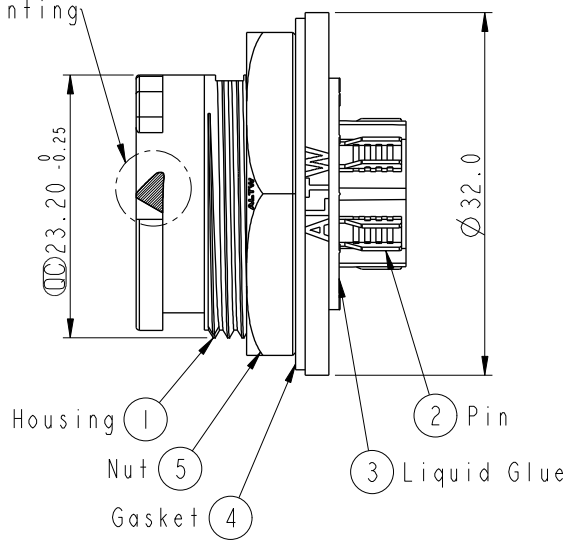

Pin Assignments
Front View

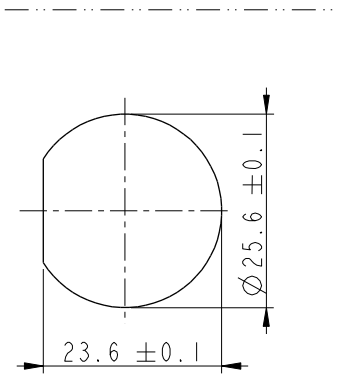

Recommended Panel
Cut-Out

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP68, Unmated. In 1 meters water within 24hours.
 - * Housing: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Nut: Thermoplastic, Black.
 - * Gasket: Rubber, Gray.
 - * Use Without Waterproof Cap
Panel Thickness Max: 3.6mm
 - * Use With Waterproof Cap
Panel Thickness Max: 2.6mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE X-Lok D Size 20A(For Power) Receptacle Front 5P M Conn M Pin		
TOLERANCE		SCALE	SIZE	SHEET
.X ±0.25		3:2	A4	1 OF 1
.XX ±0.1		REV.	WC-REV.	
.XXX ±0.05		B	A.2	
ANGLES ±1°				QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DC-05PMMS-QC800P	DRAWN BY	Vicky	DATE	2019-03-12
DWG NO	DC-05PMMS-QC800P	CHECKED BY	Rita	DATE	2019-03-12
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-12