

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED AS PER ECR-15-005925	21APR2015	RS	JL
	A1	REVISED AS PER ECR-15-011621	06AUG2015	RS	JL

NOTES:

- 1 MATERIALS:
CONTACTS: COPPER ALLOY, TIN PLATE
CONTACT POSITIONER: GLASS FILLED PBT,
COLOR BLACK.
2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
3. CONTACTS (3X) ARE PRE-ASSEMBLED INTO CONTACT
POSITIONER AS SHOWN.
- 4 ASSEMBLY "KEY" ALIGNS WITH "PE"
CONTACT AS SHOWN.
5. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

M1.5 HEX
DRIVE

4.7
2X

PART NO.
1-2213395-1

"PE"
CONTACT

"PE CONTACT" POSITION

M1.5 HEX
DRIVE


2.3
2X

PART NO.
2213395-1

"PE"
CONTACT

"PE CONTACT" POSITION

3.3

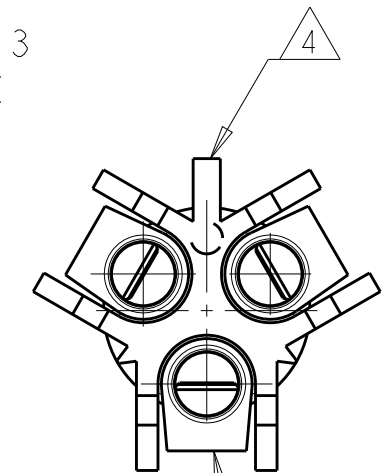

"PE" CONTACT


CONTACT
(3X)

CONTACT
POSITIONER
(1X)

"PE" SYMBOL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL
TBD

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±0.2
2 PLC ±0.13
3 PLC ±
4 PLC ±
ANGLES ±

FINISH

-

DWN J. SHAFFER 31MAR2014

CHK M. LUKSIC 31MAR2014

APVD M. LUKSIC 31MAR2014

PRODUCT SPEC

108-133014

APPLICATION SPEC

114-32111

WEIGHT

-

Customer Drawing

IEC (DEKRA)

1-2213395-1

UL

2213395-1

AGENCY APPROVALS

PART NO.



TE Connectivity

NAME
ASSY, FI PIN, NECTOR M-LINE
SEALED, 3 POSN

SIZE

A3

CAGE CODE

-

DRAWING NO

©-2213395

RESTRICTED TO

-

SCALE 3:1

SHEET 1 OF 1

REV A1