
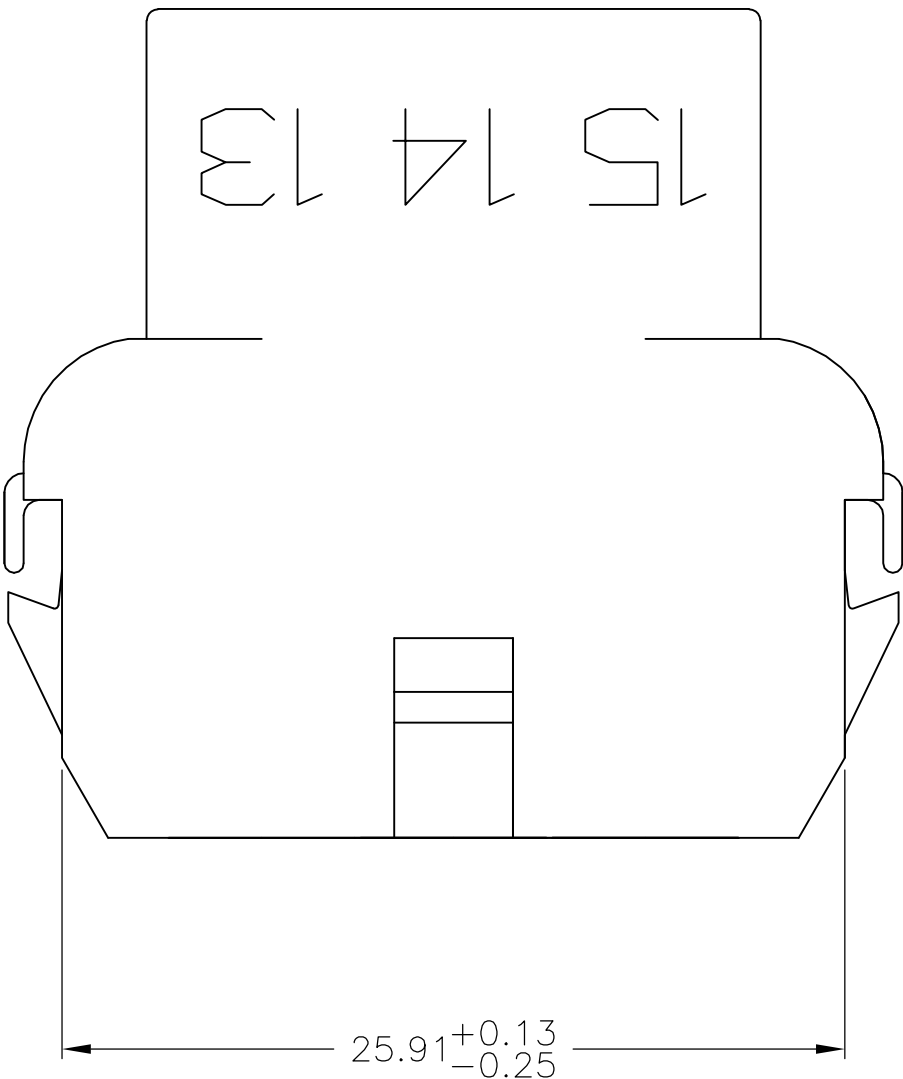
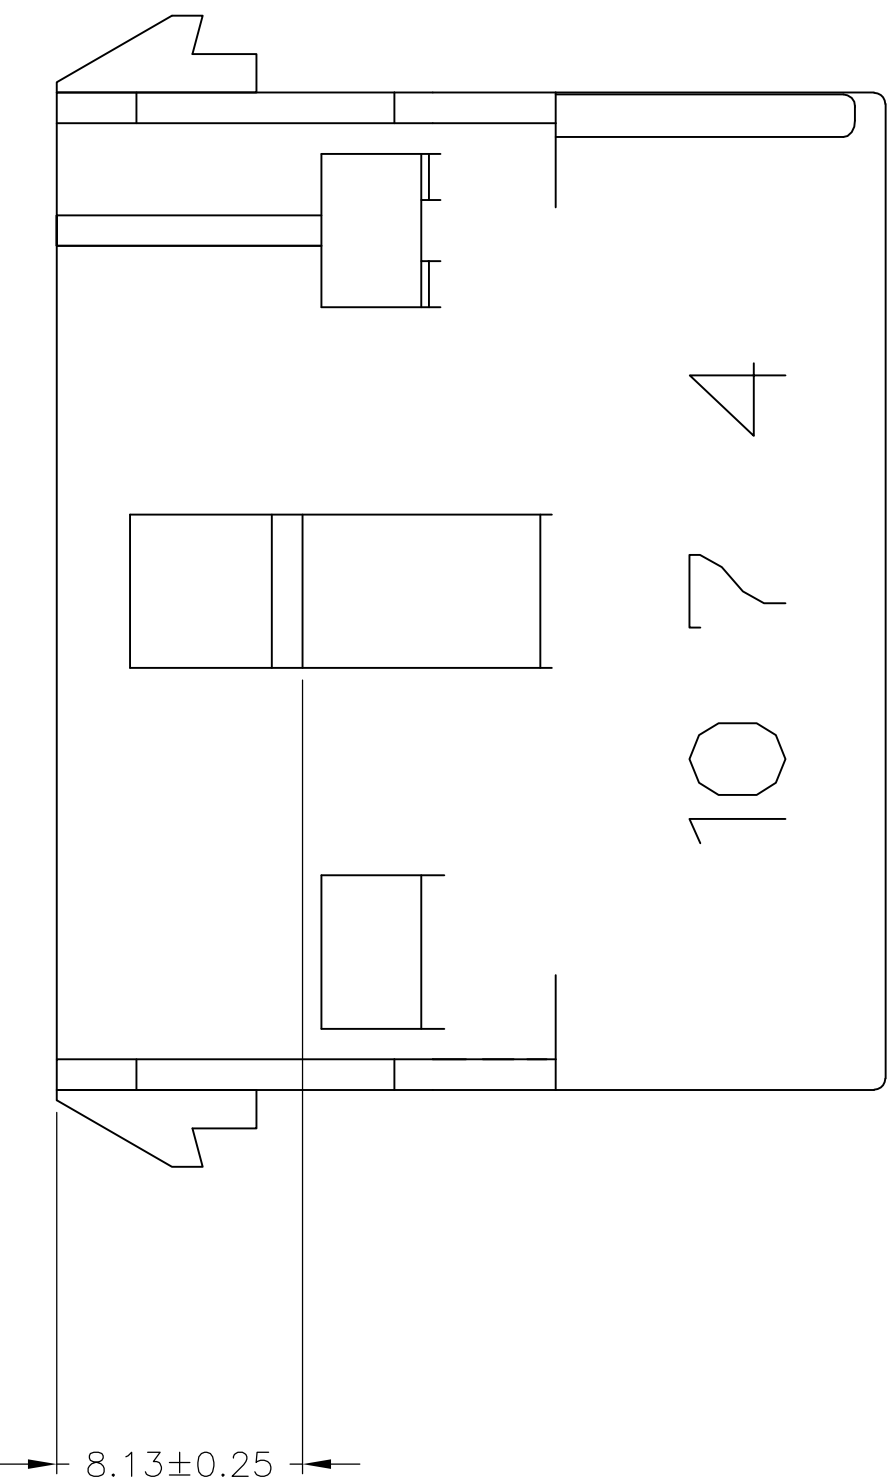
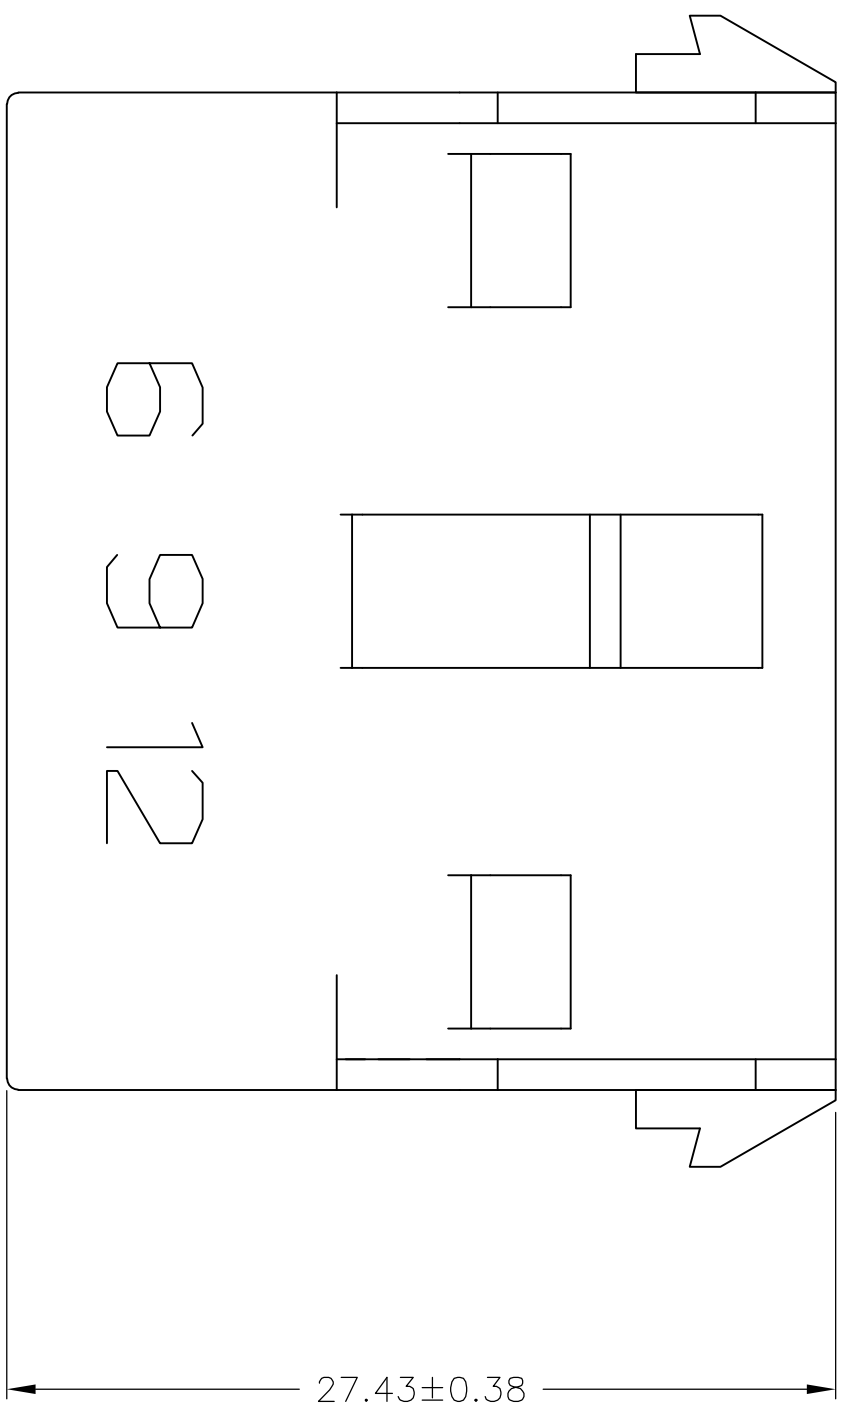
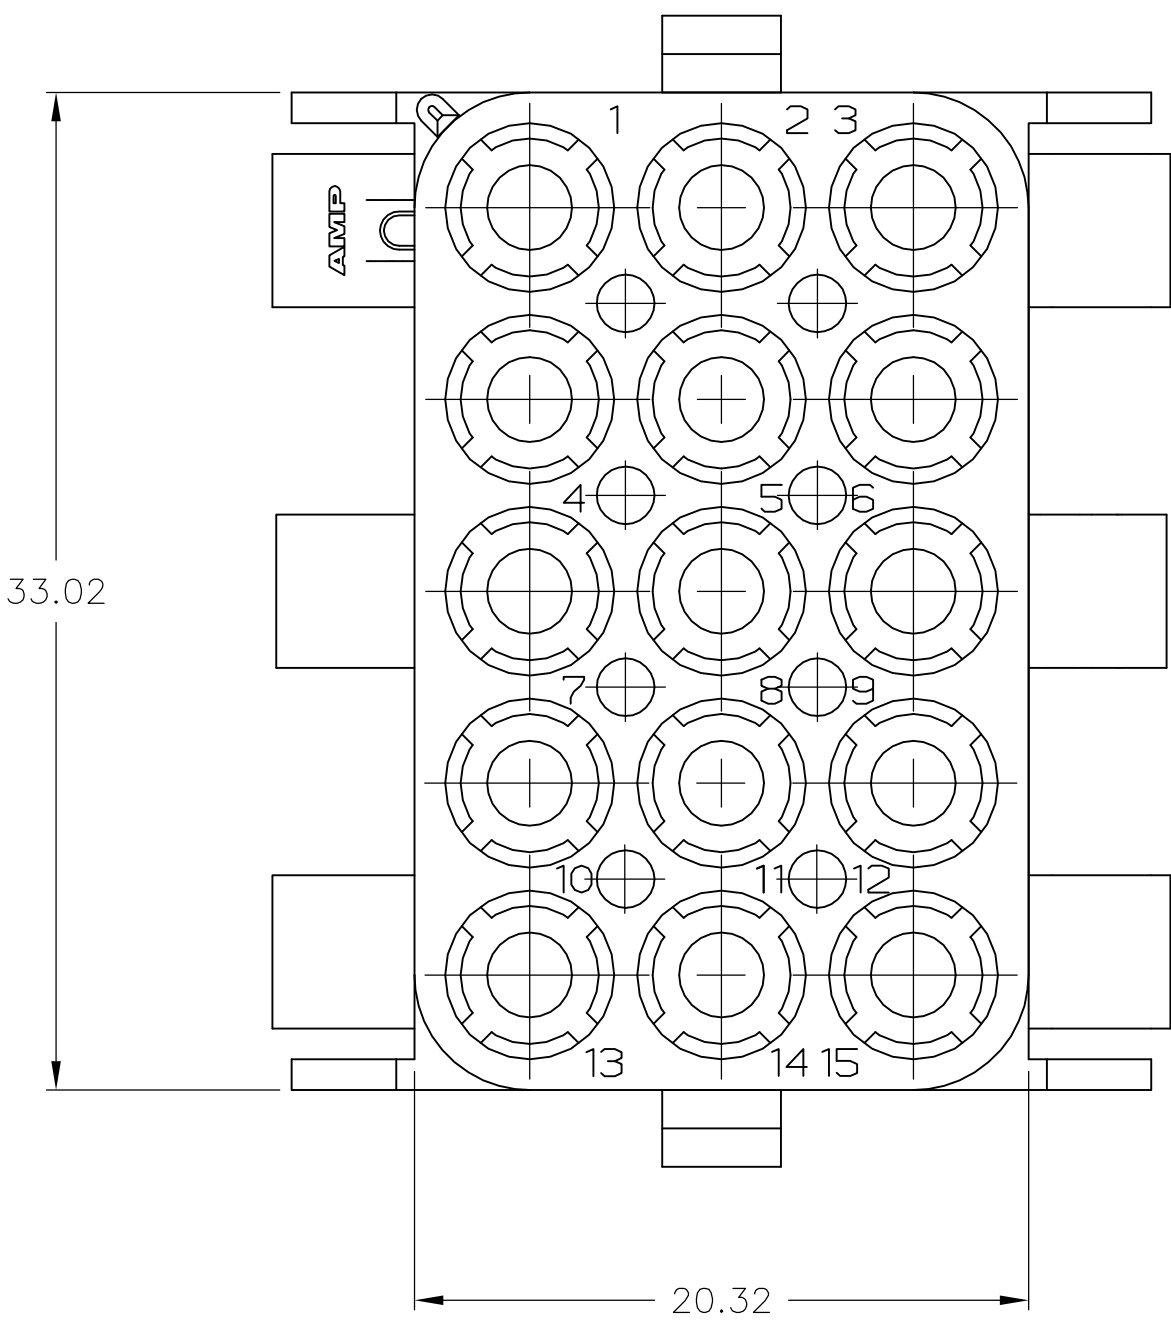


LOC		DIST		REVISIONS			
CM	00	#	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

- 1 . STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE);CLARIFICATION MARKS UNDER THE 6 & 9.
2. CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

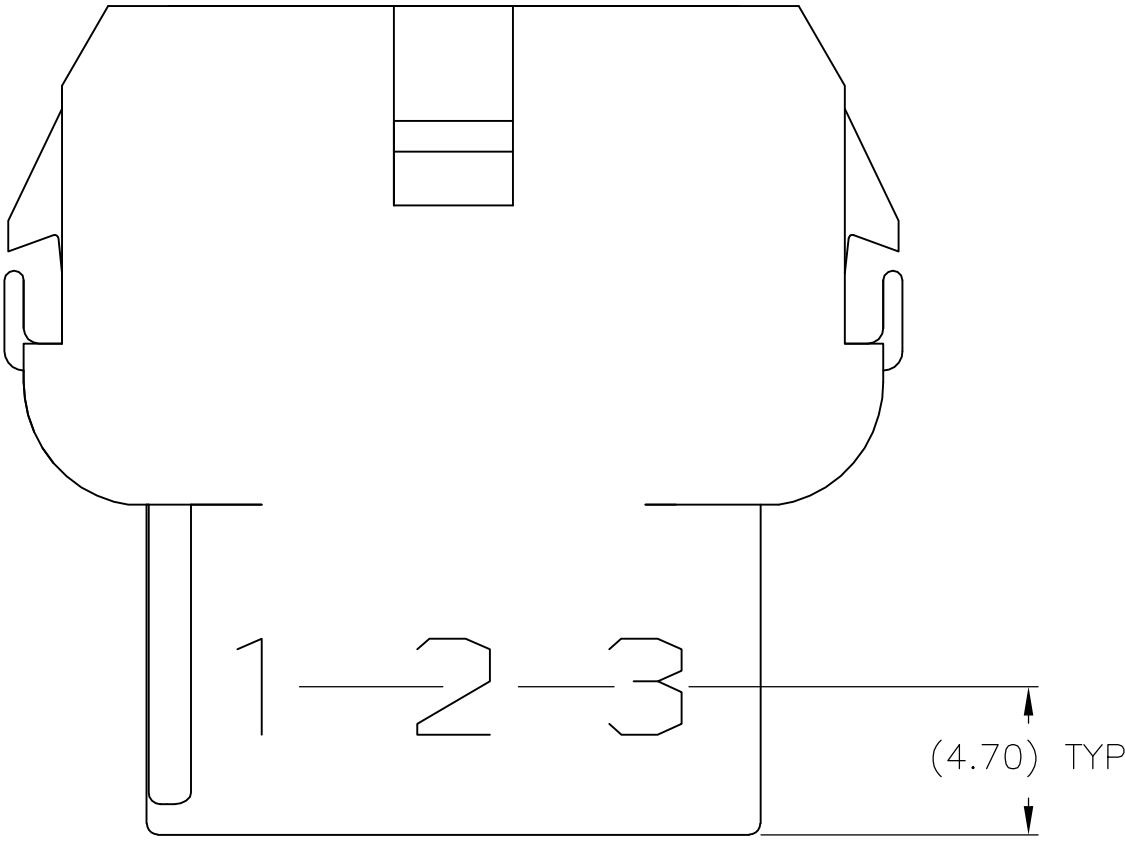

5.08	.200	-	-
4.70	.185	33.02	1.300
3.18	.125	27.43	1.080
0.38	.015	25.91	1.020
0.25	.010	20.32	.800
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			

NATURAL	2-480711-0
COLOR	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 29JUL2004	 TE Connectivity	
		CHK S. RIDGILL 29JUL2004		
DIMENSIONS: mm		APVD S. RIDGILL 29JUL2004	NAME	
		0 PLC ± — 1 PLC ± — 2 PLC ± 0.13 3 PLC ± — 4 PLC ± — ANGLES ± 0°30'	CAP, 15 CIRCUIT, UNIVERSAL MATE-N-LOK TM	
		PRODUCT SPEC		
MATERIAL NYLON. UL94V-2		APPLICATION SPEC		SIZE A1
		CAGE CODE —		
FINISH —		DRAWING NO 480711		RESTRICTED TO —
		CUSTOMER DRAWING		SCALE 4:1 SHEET 2 OF 2 REV A.3