

CT3099


MicroLead, 0.031 Jack to 4mm Jack

Pair of leads, 08mm female jack to 4mm banana jack

Description

Pair of interconnecting leads for MicroClip Test Clips and MiniFlex Clips to connect instruments. 0.8mm female jack to 4mm banana jack with Silicone lead wire. Connect MicroClip Test Clips to sheath banana plug leads for DMM use.

- Highly flexible Silicone lead wire
- Material: Brass, Gold Plt.
- Red and black pair

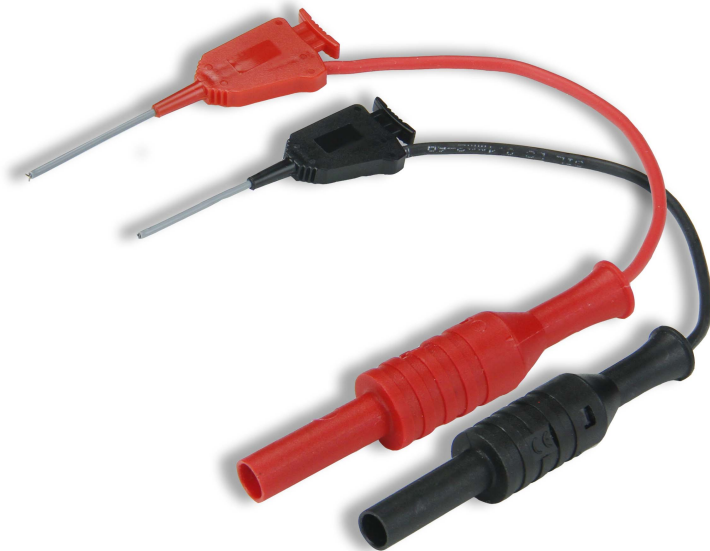

Technical data subject to change.

© Cal Test Electronics 2018.

caltestelectronics.com

Datasheet

All specifications apply to the unit after a temperature stabilization time of 20 minutes over an ambient temperature range of 25°C ± 5°C.

Specifications

IEC Rating	33 Vac / 70 Vdc
Current Max	2 A
Resistance Max	8 milliohms
Jacket Material	Silicone
Conductor Area	0.22 mm ²
Length	10 cm
Wire Gauge	24 AWG
Stranding	7 x 0.20 mm
OD	1.4mm (0.055")
Temperature (degrees)	-20 to +80 C
RoHS (2011/65/EU)	Compliant

Specifications are subject to change without notice. To ensure the most current version of this manual, please download the current version from our website: caltestelectronics.com

Technical data subject to change.

© Cal Test Electronics 2018.

caltestelectronics.com

