

**RS6**

Miniature Sized, High Capacitance



- Low ESR, High Capacitance, High ripple current.
- Miniature Sized.
- Load life of 2000 hours at 105°C.
- Radial lead type : Lead free flow soldering condition correspondence.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).

RNE

Higher  
Capacitance**RS6****FPCAP**


Expanded

**■ Specifications**



| Item                          | Performance Characteristics                                                                      |                                                   |
|-------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------|
| Category Temperature Range    | -55 to +105°C                                                                                    |                                                   |
| Rated Voltage Range           | 2.5 to 25V                                                                                       |                                                   |
| Rated Capacitance Range       | 33 to 560μF                                                                                      |                                                   |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C                                                                              |                                                   |
| Tangent of loss angle (tan δ) | Less than or equal to the specified value at 120Hz, 20°C                                         |                                                   |
| ESR (※1)                      | Less than or equal to the specified value at 100kHz, 20°C                                        |                                                   |
| Leakage Current (※2)          | Less than or equal to the specified value. After 2 minutes' application of rated voltage at 20°C |                                                   |
| Endurance                     | Test condition                                                                                   | 105°C, rated voltage 2000 / 5000Hrs.              |
|                               | Capacitance change                                                                               | Within ±20% of initial value before test          |
|                               | tan δ                                                                                            | 150% or less than the initial specified value     |
|                               | ESR(※1)                                                                                          | 150% or less than the initial specified value     |
|                               | Leakage current (※2)                                                                             | Less than or equal to the initial specified value |

※1 ESR should be measured at both of the terminal ends closest to the capacitor body.

※2 Conditioning : If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.

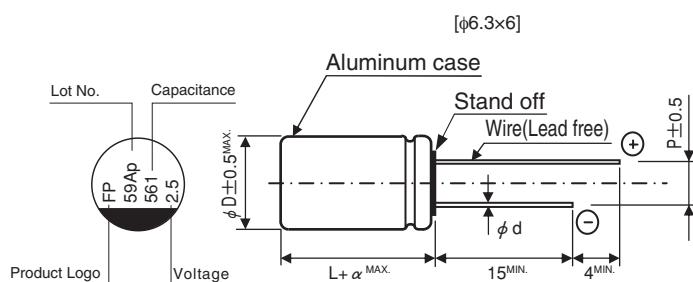
**■ Dimensions**

Type numbering system (Example : 2.5V 560μF)  
Nichicon part number

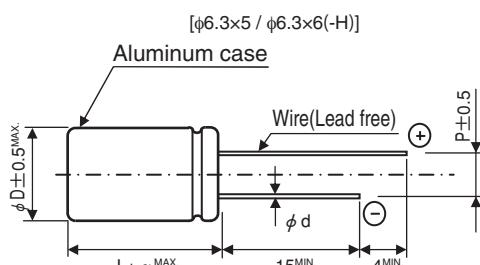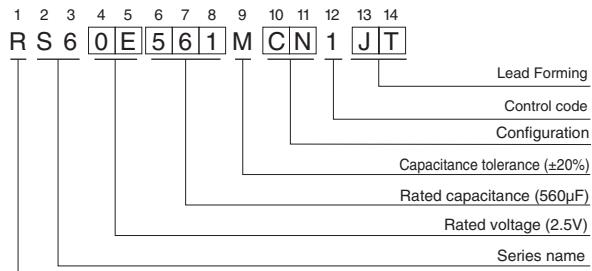

| $\phi D \times L$ | $\phi d$ | P   | $\alpha$ |
|-------------------|----------|-----|----------|
| 6.3x5             | 0.5      | 2.5 | 1.0      |
| 6.3x6             | 0.45     | 2.5 | 1.0      |

(mm)

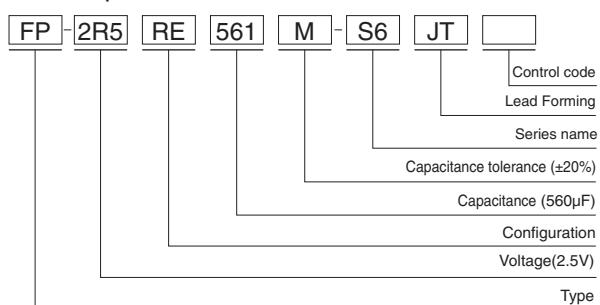**FPCAP part number****● Frequency coefficient of rated ripple current**

| Frequency   | 120 Hz | 1 kHz | 10 kHz | 100 kHz | 300 kHz |
|-------------|--------|-------|--------|---------|---------|
| Coefficient | 0.10   | 0.45  | 0.50   | 1.00    | 1.00    |



# RS6

## ■ Dimensions

| Rated Voltage<br>(V)<br>(code) | Surge<br>Voltage<br>(V) | Rated<br>Capacitance<br>( $\mu$ F) | Case Size<br>$\phi$ D×L (mm) | $\tan \delta$ | Leakage<br>Current<br>( $\mu$ A, 2min.) | ESR<br>(mΩ)<br>(20°C/100kHz) | Rated Ripple<br>Current<br>(mA rms)<br>(105°C/100kHz) | NICHICON          | FPCAP                  |
|--------------------------------|-------------------------|------------------------------------|------------------------------|---------------|-----------------------------------------|------------------------------|-------------------------------------------------------|-------------------|------------------------|
| 2.5<br>(0E)                    | 2.8                     | 390                                | 6.3×5                        | 0.10          | 500                                     | 12                           | 3500                                                  | RS60E391MCN1 □□   | FP-2R5RE391M-S6 □□     |
|                                |                         | 560                                | 6.3×5                        | 0.12          | 700                                     | 13                           | 3600                                                  | RS60E561MCN1 □□   | FP-2R5RE561M-S6 □□     |
|                                |                         | *560                               | 6.3×5                        | 0.12          | 700                                     | 13                           | 3600                                                  | RS60E561MCNASQ □□ | FP-2R5RE561M-S6 □□ -5K |
| 6.3<br>(0J)                    | 7.2                     | 220                                | 6.3×5                        | 0.12          | 500                                     | 15                           | 3200                                                  | RS60J221MCN1 □□   | FP-6R3RE221M-S6 □□     |
| 10<br>(1A)                     | 11.5                    | 150                                | 6.3×5                        | 0.10          | 450                                     | 25                           | 2500                                                  | RS61A151MCN1 □□   | FP-010RE151M-S6 □□     |
| 16<br>(1C)                     | 18.4                    | 100                                | 6.3×6                        | 0.10          | 500                                     | 24                           | 2490                                                  | RS61C101MDN1 □□   | FP-016RE101M-S6 □□     |
|                                |                         | 100                                | 6.3×6                        | 0.10          | 500                                     | 24                           | 2490                                                  | RS61C101MCN1 □□   | FP-016RE101M-S6 □□ -H  |
|                                |                         | 180                                | 6.3×5                        | 0.10          | 576                                     | 20                           | 3200                                                  | RS61C181MCN1 □□   | FP-016RE181M-S6 □□     |
| 25<br>(1E)                     | 28.7                    | 33                                 | 6.3×5                        | 0.10          | 165                                     | 60                           | 1700                                                  | RS61E330MCN1 □□   | FP-025RE330M-S6 □□     |
|                                |                         | 47                                 | 6.3×5                        | 0.10          | 235                                     | 30                           | 2800                                                  | RS61E470MCN1 □□   | FP-025RE470M-S6 □□     |
|                                |                         | 56                                 | 6.3×5                        | 0.10          | 280                                     | 30                           | 2800                                                  | RS61E560MCN1 □□   | FP-025RE560M-S6 □□     |

\* : Load life 5000hours.

## ■ Frequency Characteristics (The frequency characteristics are typical and not a guaranteed value.)

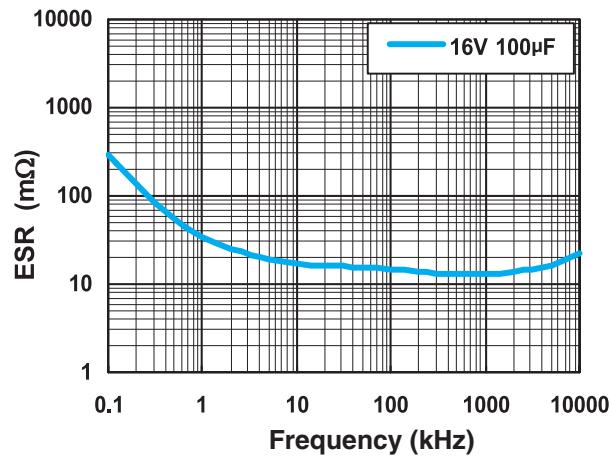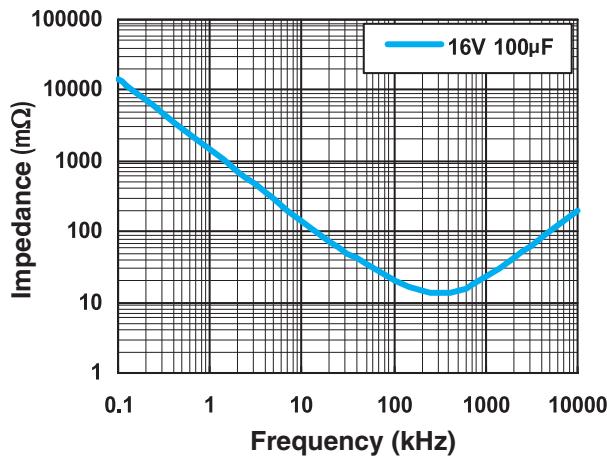

- Taping specifications are given in page 26, 27.
- Please refer to page 3 for the minimum order quantity.