

Page
1 / 2

OPTIONS: INDICATOR

```

FREQUENCY RANGE      : 0 - 3 GHz
IMPEDANCE            : 50 Ohms

```

FREQUENCY (GHz)	0 - 1	1 - 2	2 - 3
V.S.W.R ≤	1.15	1.20	1.25
INSERT. LOSS ≤	0.15 dB	0.20 dB	0.25 dB
ISOLATION ≥	85 dB	80 dB	75 dB
AVER. POWER (*)	400 W	300 W	240 W

ACTUATOR	: LATCHING
NOMINAL CURRENT AT 25° C (±10%)	: 320 mA
ACTUATOR VOLTAGE (Vcc)	: 12V (10.2 to 13V) /NEGATIVE COMMON
TERMINALS	: male D-sub 9 pins (4-40 UNC nuts)
INDICATOR RATING	: 1 W / 30 V / 100 mA

CONNECTORS	: BNC fem. per MIL C 39012
LIFE	: 1.000.000 cycles
SWITCHING TIME (nominal voltage;25° C)	: < 15 ms
CONSTRUCTION	: splashproof
WEIGHT	: <185 g

OPERATING TEMPERATURE RANGE (°C) : -40 , +85
STORAGE TEMPERATURE RANGE (°C) : -55 , +85

(* : average power at 25° C)

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary




R570.242.005

DRAWING

General tolerance: * 0,5 mm


issue

Page
2/2

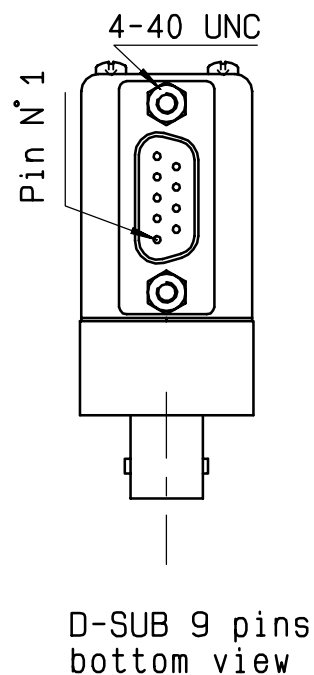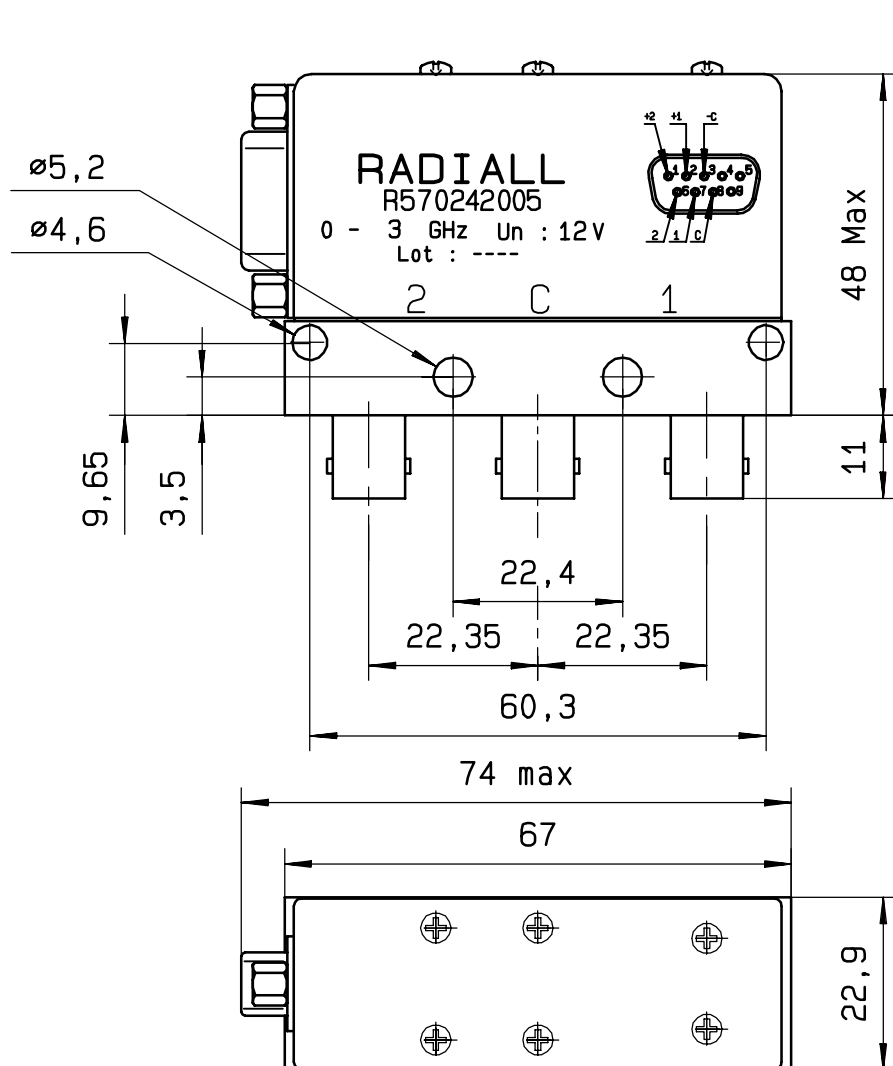

SCHEMATIC DIAGRAM

Voltage	RF continuity	Indicator
- C + 1	C ↔ 1	C . 1
- C + 2	C ↔ 2	C . 2

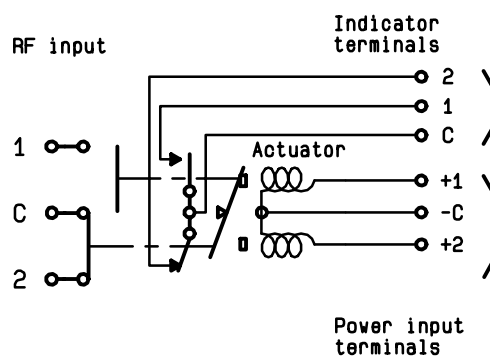

ISSUE 22. jan.08