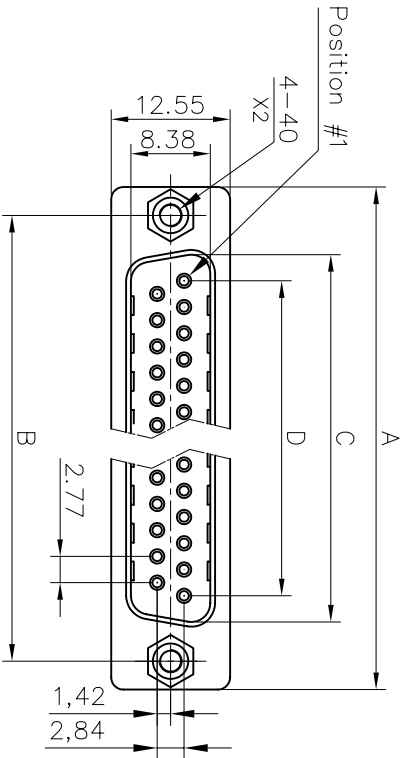


Customer drawing

Nb OF CONTACTS	Dimension				
	A	B	C	D	E
9	30.84	24.99	16.92	11.09	19.28
15	39.24	33.32	24.70	19.39	27.51
25	53.04	47.04	38.96	33.24	41.30
37	69.32	63.50	55.42	49.86	57.71


REVISONS			
SNV	ECN	DESCRIPTION	DATE
1			01/08/08

D-SUB TECHNICAL DATA

SHELL : Steel 100u" min. tin. over 50u" min nickel
BODY : Glass filled thermoplastic.
Flame retardant to UL94 V-0 color black
CONTACTS : Brass
15u" gold over 50u" min nickel on mating area.
100u" min tin over 50u" min nickel on solder area
SCREWLOCK: Brass, 100u" min tin over 50u"min nickel
ELECTRICAL: Voltage rating : 250 V Rms to 50 Hz
Current rating : 3A
Withstanding Voltage >1000 V Rms to 50 Hz for one minute
Insulation resistance >5000 M Ohms
Contact resistance 20 mOhms max.
CLIMATIC : Temperature range -55 °C up to 125°C
MARKING : Amphenol...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 777 SD X XX P VF

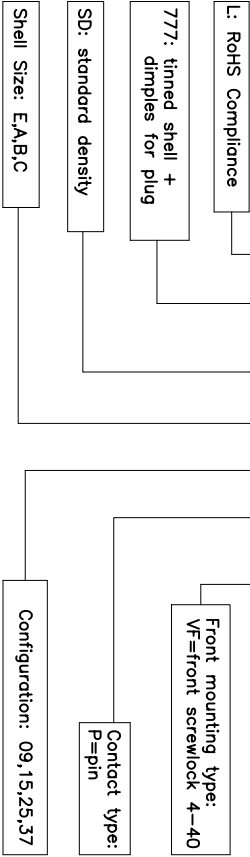

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
TOLERANCES	U.S.	METRIC	DRAWN	CHECKED	DATE
			08/06	16/08/08	08/06
			0.50		
			0.30		
			0.20		
			2'		
FOR MATERIALS AND FINISHES SEE NOTES					
REMOVE SHARP EDGES					
DIMENSIONS					
T-S- INCHES					
M-M					
ANGLE OF PROJECTION					
TITLE					
Stamped and Formed contacts, SD series					
SIZE DRAWING NO.					
A4 C L777SDXXXPVF					
SCALE					
NONE					
SHEET 1 OF 1					