


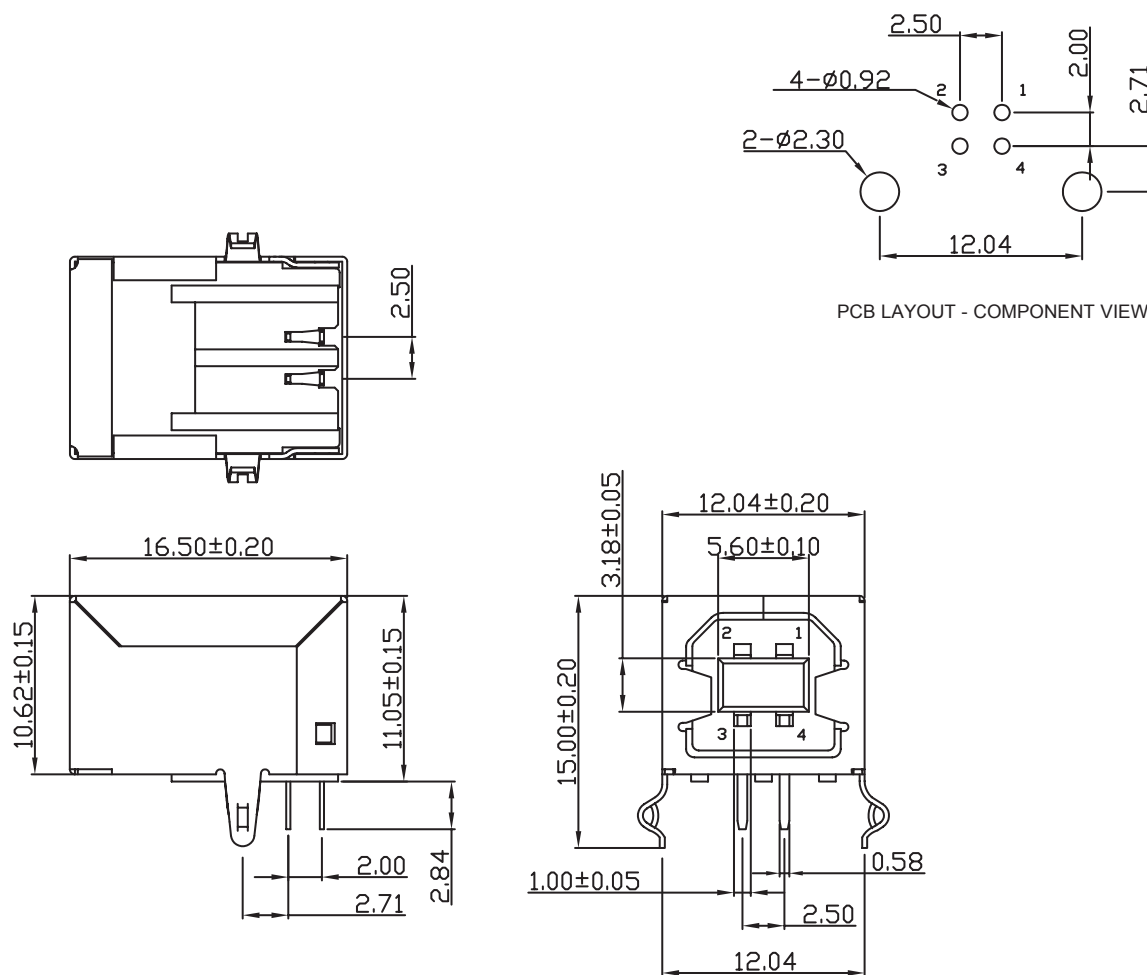

TECHNICAL CHARACTERISTICS


MATERIAL
INSULATOR: PBT
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRASS Ni PLATED
QUALITY CLASS: 1500 MATING CYCLES

ENVIRONMENTAL
OPERATING TEMPERATURE: -40°C UP TO +85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5 A MAX
WORKING VOLTAGE: 30 VAC
INSULATOR RESISTANCE: >1000 MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/MIN
CONTACT RESISTANCE: 20 mΩ MAX

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
TRAY

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15				D
G									
F									
E									
D	27-OCT-14	REVIEW	QL						
C	15-FEB-13	DESIGNATION	AR	APPROVAL: NPr	UNIT: MM	DESCRIPTION: USB 2.0 TYPE B BLACK		SIZE A4	
B	08-NOV-11	CURRENT RATING	GG		SCALE:				
A	18-MAR-08	PDF	CH		SHEET: 1/1	WERI PART NO: 614 004 141 121			
REV	DATE	FILE	BY		DRAW: QL				