

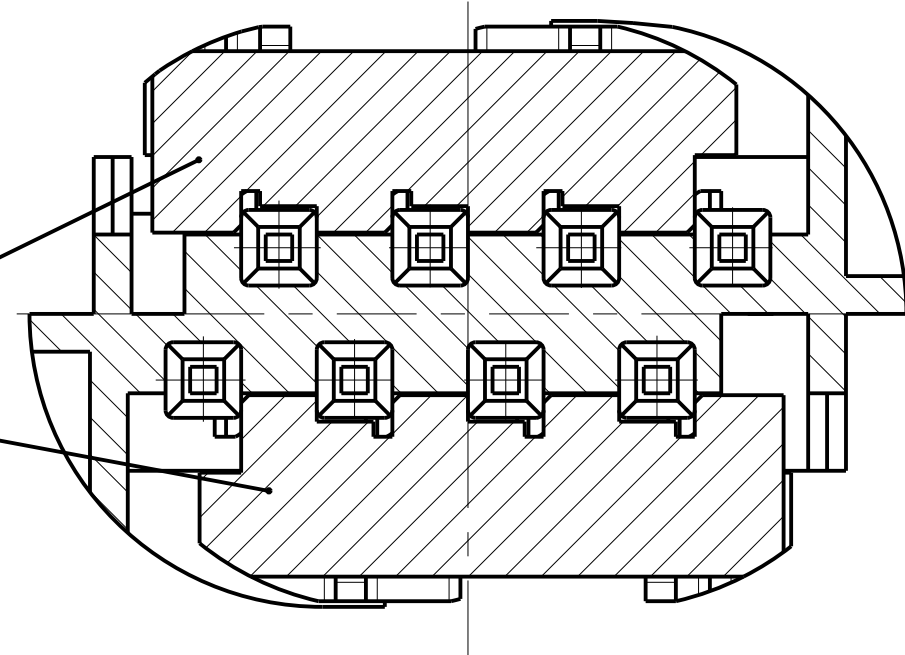
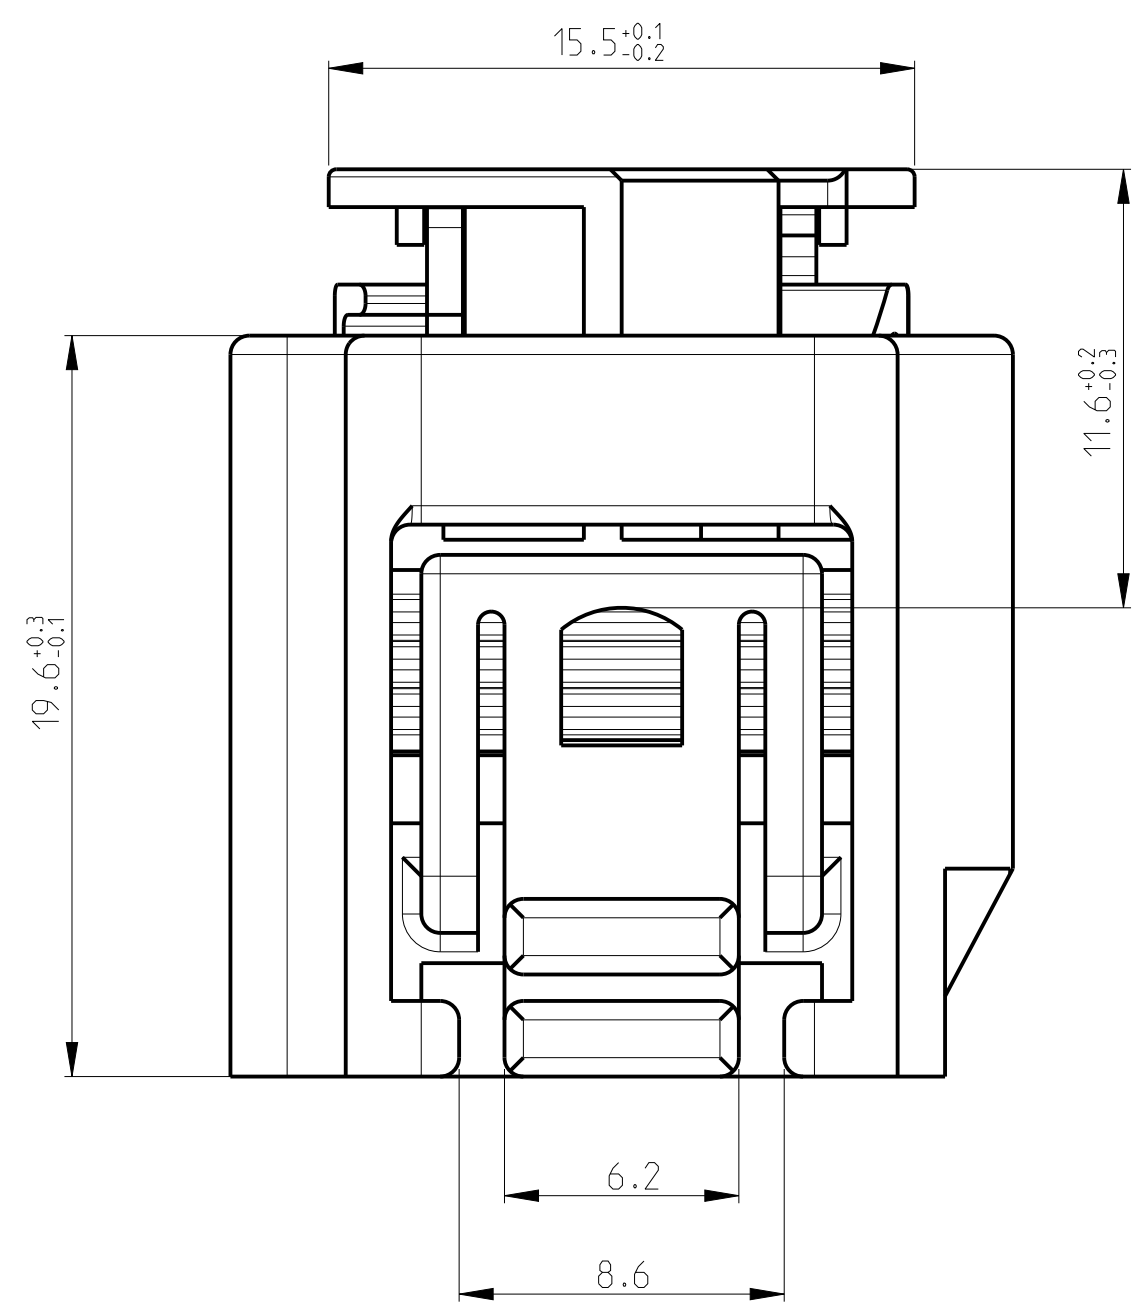


B-B

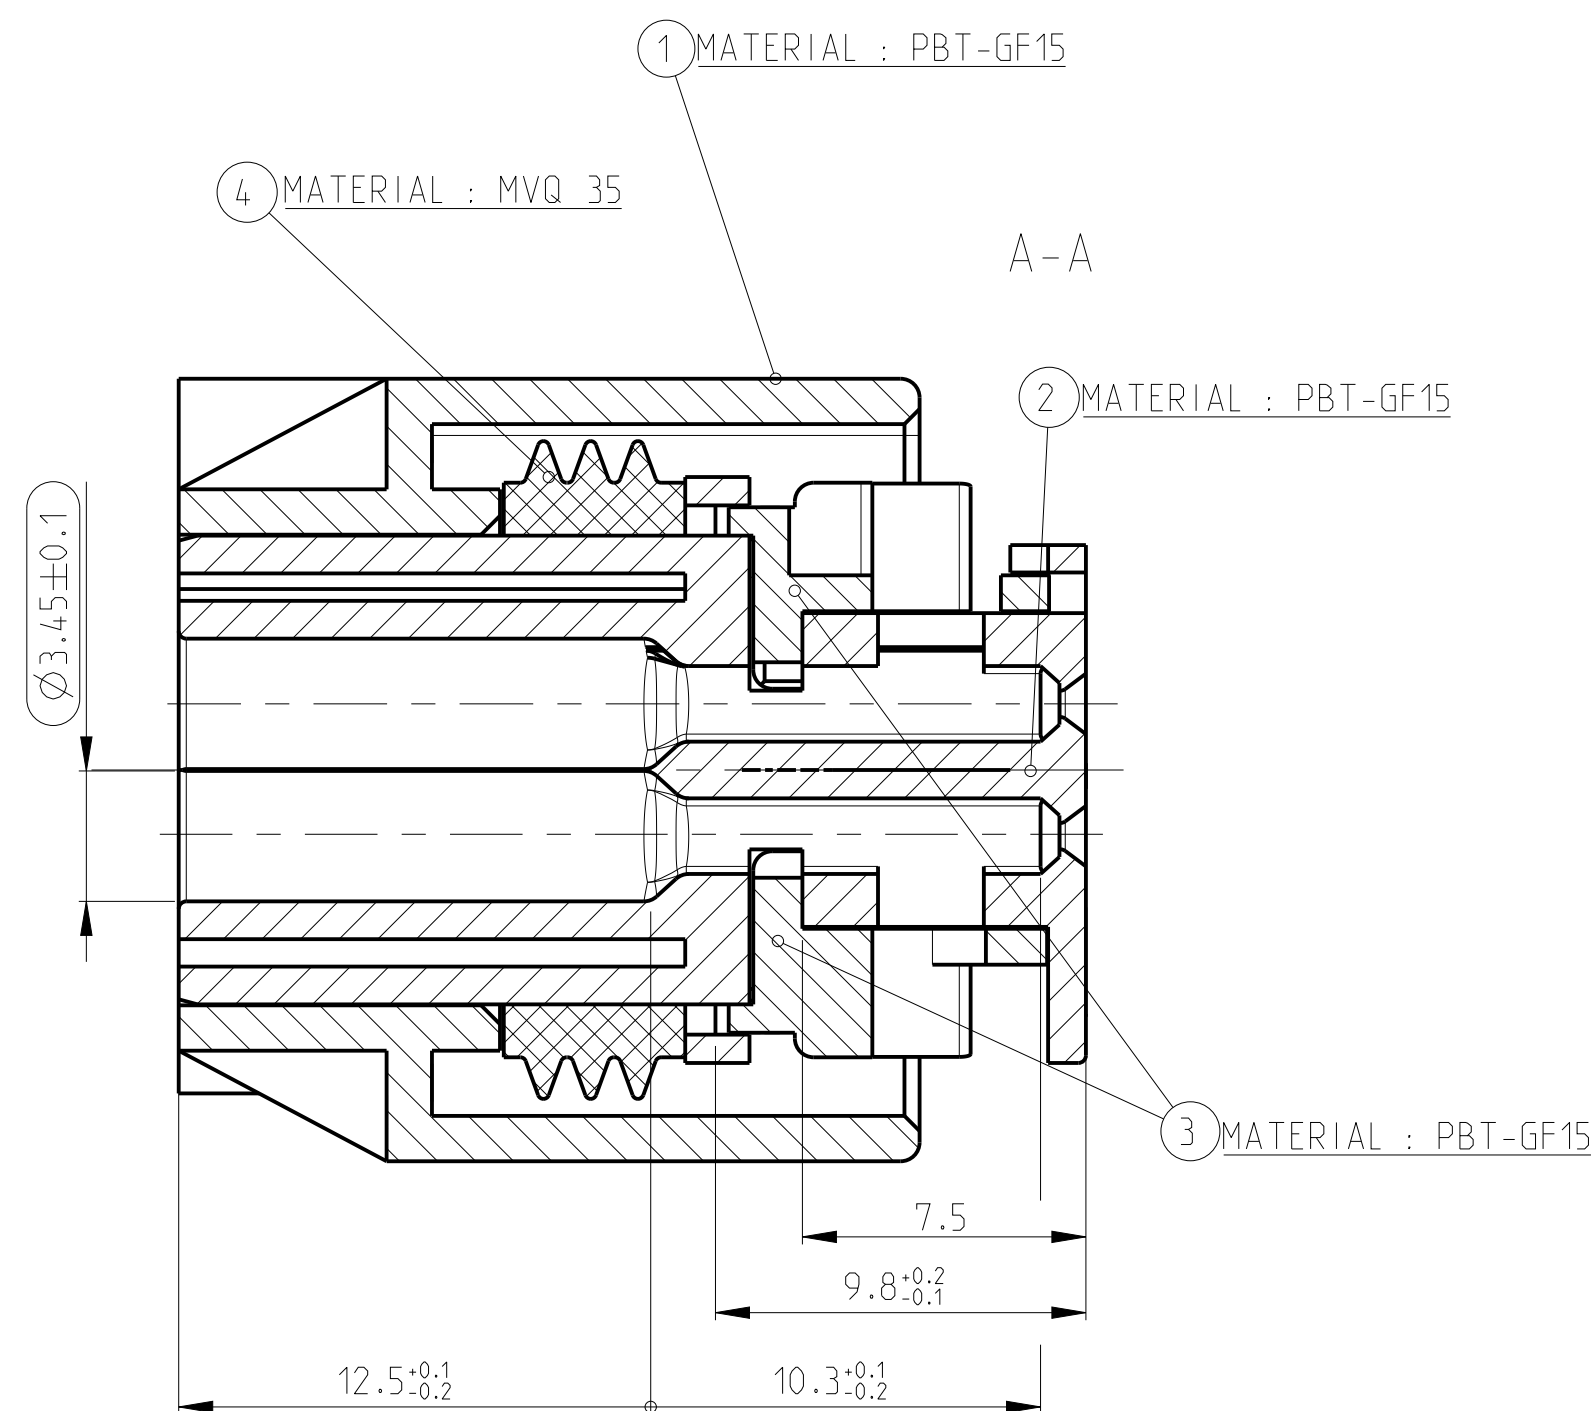


B-B

Verschiebeweg/DISPLACE : 2x1.6 mm

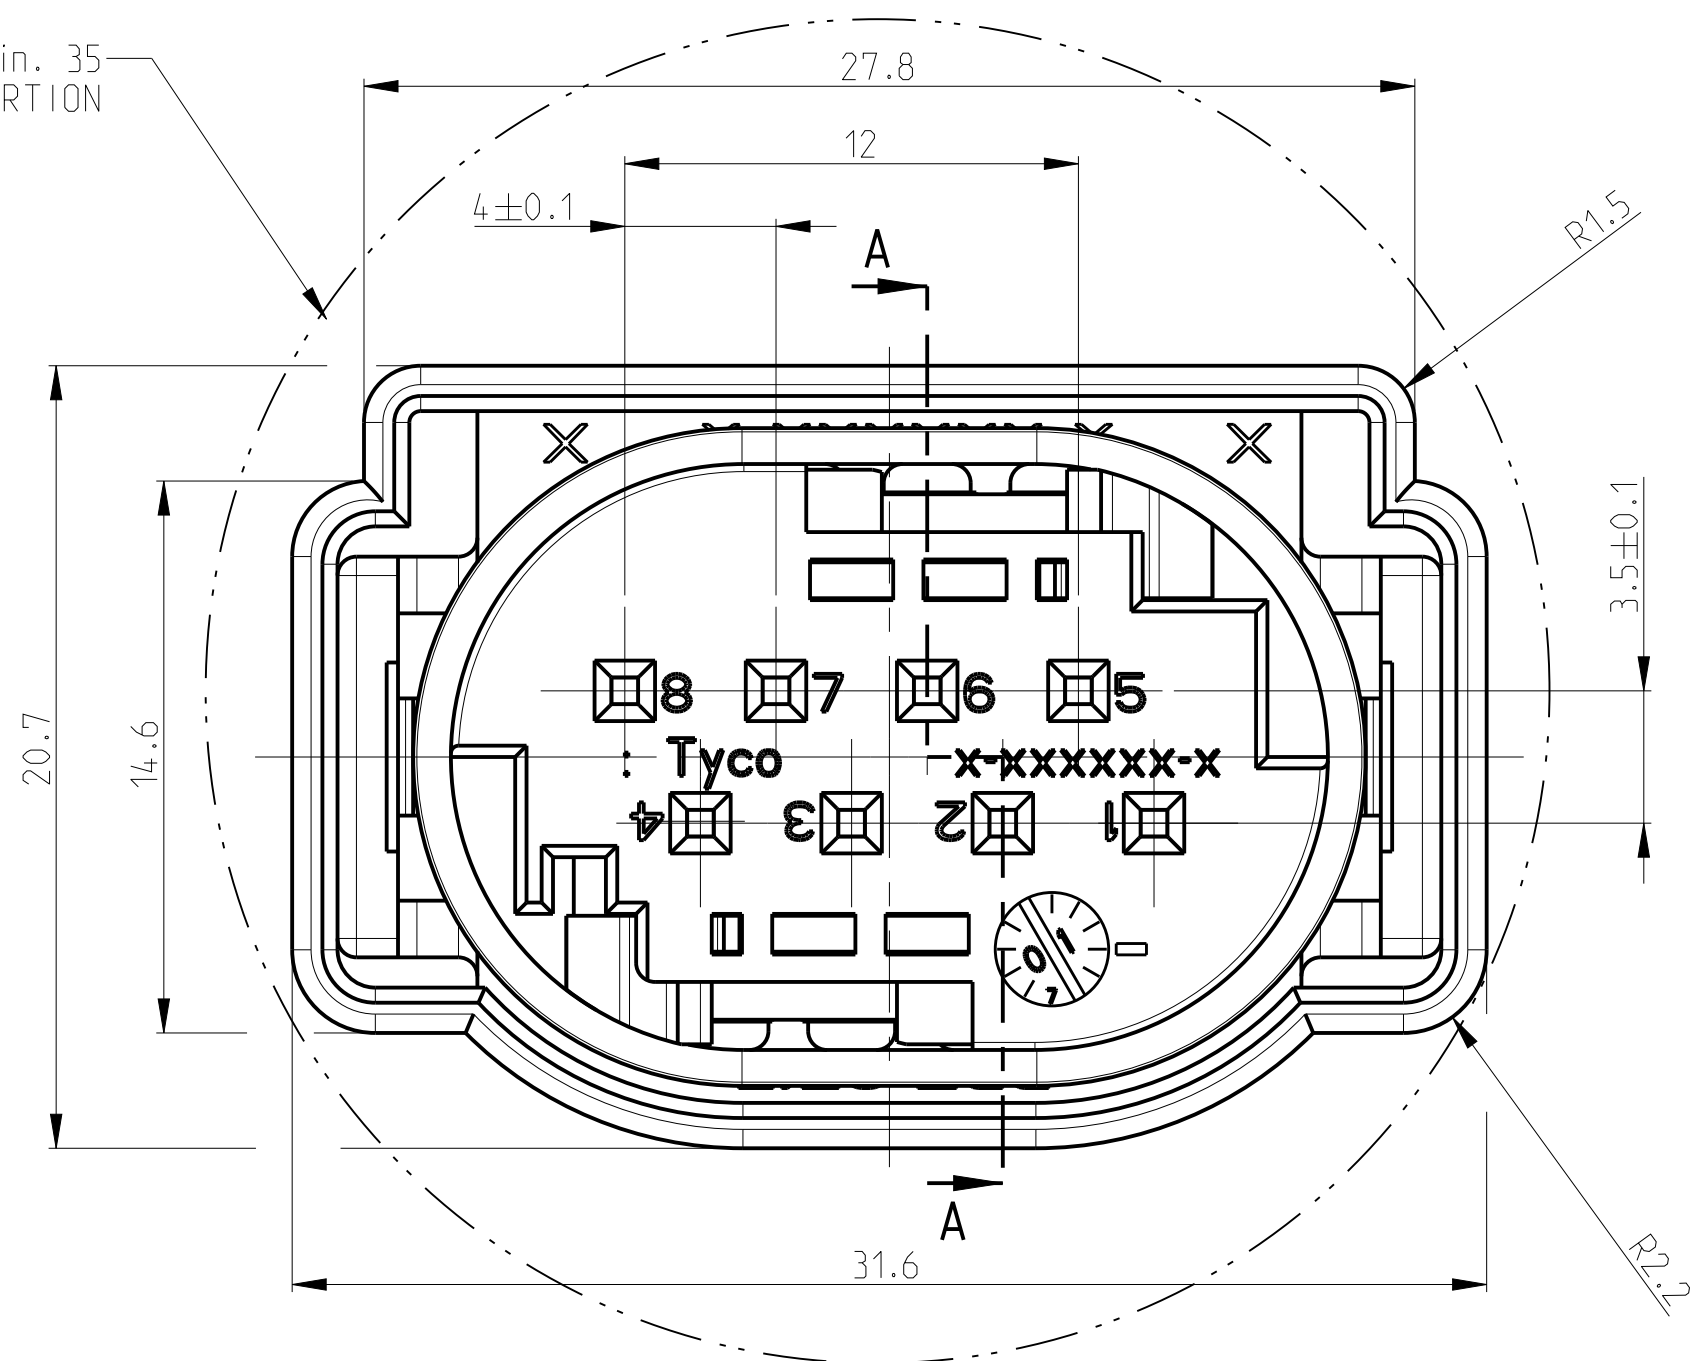


- 1- Kodierung A gezeichnet
CODING A AS SHOWN
- 2- Massgebend ist der deutsche Text
ONLY THE GERMAN-LANGUAGE VERSION SHALL BE BINDING
- 3- Passend fuer Leitungsquerschnitt: bis 0.75mm²
SUITABLE FOR WIRE SIZE RANGE : TO 0.75mm²
- 4- Kammer 1-4 und 5-8 wahlweise zugespitzt moeglich
CAVITY 1-4 and 5-8 INJECTED POSSIBLE
- 5- Passend zu Kontaktbuchse fuer Einzeileiterabdichtung;
SUITABLE FOR SOCKET CONTACT FOR SINGLE WIRE SEALING ;
TE 962895 (DGB 0.2-0.5mm²) . 965906 (DGB 0.75mm²)

CODING B
2-1534229-1

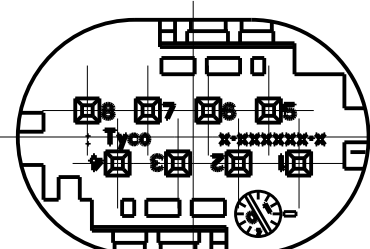

CODING B
2-1534229-2

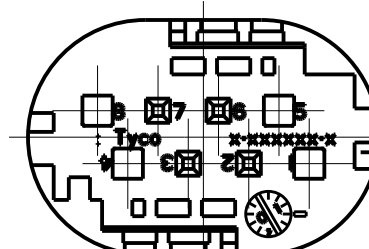

CAVITY 1,4,5,8 LOCKED
Kammer 1,4,5,8 geschlossen

1:1

Kragenanschluss
SHROUDED CONNECTION



THIS DRAWING IS CONSIDERED TO BE THE PROPERTY OF THE COMPANY AND IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF THE COMPANY. IT IS TO BE USED FOR THE PURPOSES SPECIFIED ONLY. IT IS NOT TO BE USED FOR ANY OTHER PURPOSES. IT IS NOT TO BE USED FOR ANY OTHER PURPOSES. IT IS NOT TO BE USED FOR ANY OTHER PURPOSES.		DWG. 17 JUL 2001 A.Kopely CHK. M. Schwaeger APPD.		 TE Connectivity	
THIS DRAWING IS CONSIDERED TO BE THE PROPERTY OF THE COMPANY AND IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF THE COMPANY. IT IS TO BE USED FOR THE PURPOSES SPECIFIED ONLY. IT IS NOT TO BE USED FOR ANY OTHER PURPOSES. IT IS NOT TO BE USED FOR ANY OTHER PURPOSES. IT IS NOT TO BE USED FOR ANY OTHER PURPOSES.		TOLERANCES UNLESS OTHERWISE SPECIFIED: DIMENSIONS: ±0.15 mm ANGLES: ±0.5° SURFACE FINISH: Ra 0.8		NAME: Micro Quadlock System SOCKET HOUSING, 8 POS. Buchsengehäuse, 8-polig	
MATERIAL: 1.4571 (AISI 316)		PRODUCT SPEC: DWG. 108-18722-0 APPLICATION SPEC: VERBODEN TOEGANG WEIGHT: 11.0 g		SIZE: A CASE CODE: 00779 DRAWING NO. ZIEHNUMMER: C=1534229	
FINISH: POLISHED		CUSTOMER DRAWING: /KUNDENZIECHNUNG		SCALE: 1:1 SHEET: 1 OF 1 REV: A	