

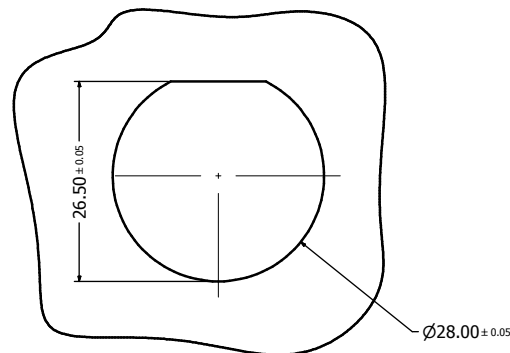





6 5 4 3 2 1

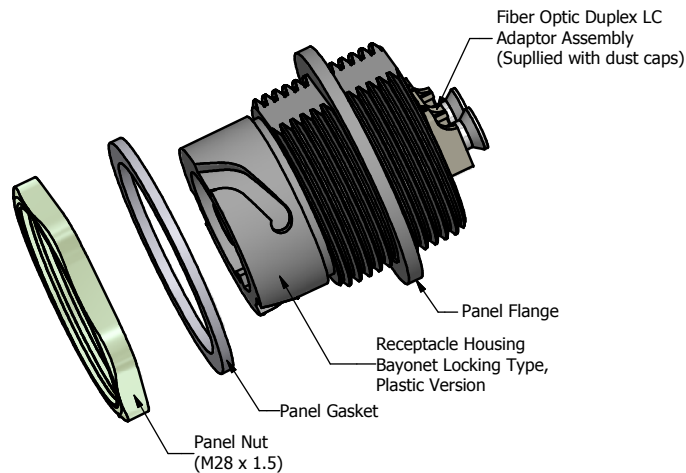

Recommended Panel Cutout (C)

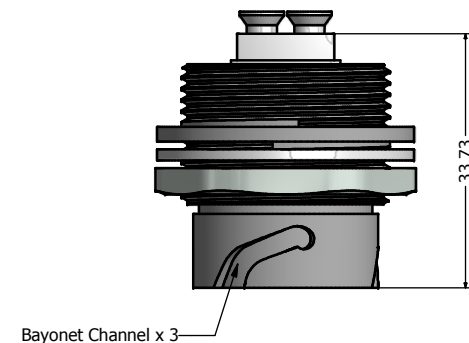

Bayonet Channel x 3

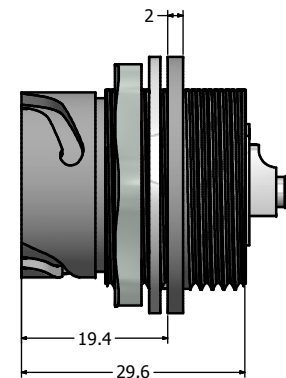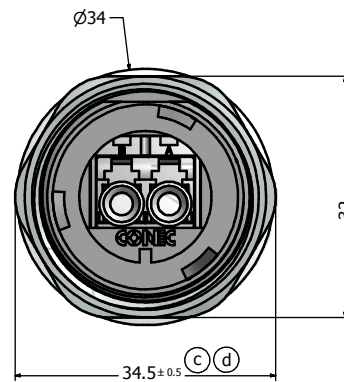

Notes:

- Material and Finish:
 - Receptacle Housing: Polyester (Black); UL94 V-0
 - Panel Nut: Brass, Finish: Nickel Plated
 - Panel Gasket: Silicone, Color: White
 - Duplex LC Adaptor Assembly:
 - Housing: Mod. PPO, UL94 V-0, Color: **SM Blue/MM Beige/APC SM Green** (b)
 - Alignment Sleeves: SM Ceramic/MM Phosphor Bronze
 - Dust Cap: PP, Color: Neutral transparent
 - Operating Temperature: -40~C to +85~C
- Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.
- IP67 rated when covered or fully mated with the appropriate mating connector
- (d) Recommended Mounting Panel Nut torque is 20 to 25 lb-inch

Description	Part Number
Single Mode (SM)	17-300010
Multi Mode (MM)	17-300020
(C) APC Single Mode (APC SM)	17-300170

Directive 2002/95/EC RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY MANNER WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION DO NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified		 Autodesk Inventor	Scale: 1.5:1	Dim. in mm
	Name	Title	Approval Date	(d)	0 PLC ± 0.50		Material: See Notes	
					1 PLC ± 0.38			
					2 PLC ± 0.25			
					3 PLC ± 0.10			
					ANGLES ± 3°		Title: IP67 Industrial Duplex LC Receptacle Assembly Kit Plastic Version	
d	3 x d	Sep/25/2013	Vincent Ke		Norm			
c	3 x c	Feb/25/2011	Vincent ke		D-old			
b	1 x b	May/28/2009	Vincent Ke					
a	original						Drawing No.: 17K1A002 Part No.: SEE PART NUMBER TABLE	
Rev.	Changes	Date	Name					

CONEC®

DIN A3
Sheet 1/1

6 5 4 3 2 1