



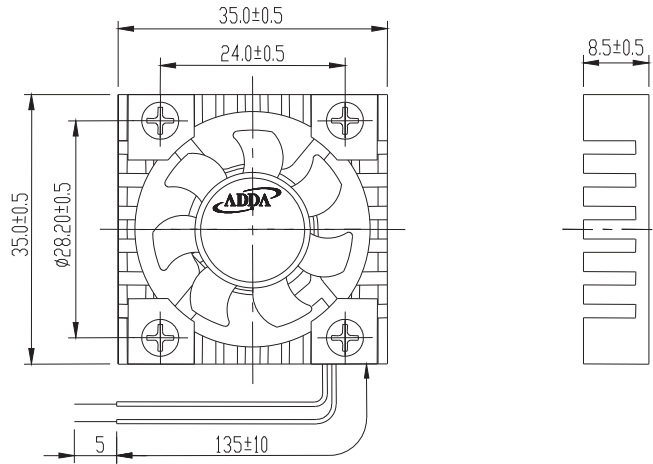

AP3508 SERIES

External Dimensions

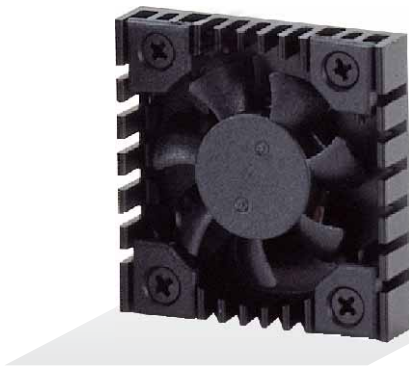

Frame: Aluminum alloy
 Impeller: Plastic (UL: 94V-0)
 Lead wire: UL1571AWG28

Specifications (Nominal)

*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ○=Ball ※=Sleeve ●=Hypro bearing

| Frame size (mm) | Model No. | Bearing System Type | Rated Voltage (VDC) | Current (A) | Power (W) | Rated Speed (rpm) | Maximum AirFlow (CMM) | Maximum AirFlow (CFM) | Maximum Pressure (InAq) | Maximum Pressure (mmAq) | *Noise Level (dB/A) | Weight (g) |
|-----------------|------------------|---------------------|---------------------|-------------|-----------|-------------------|-----------------------|-----------------------|-------------------------|-------------------------|---------------------|------------|
| 35x35x08 | AP3505LX-J70(TX) | ● | 5 | 0.07 | 0.35 | 7500 | 0.071 | 2.40 | 0.082 | 2.05 | 20.0 | 12.0 |
| | AP3505MX-J70(TX) | ● | 5 | 0.11 | 0.55 | 9000 | 0.093 | 3.30 | 0.138 | 3.45 | 27.9 | |
| | AP3505HX-J70(TX) | ● | 5 | 0.13 | 0.65 | 10500 | 0.116 | 4.10 | 0.151 | 3.78 | 32.0 | |
| | AP3512MX-J70(TX) | ● | 12 | 0.06 | 0.72 | 9000 | 0.093 | 3.30 | 0.138 | 3.45 | 27.9 | |
| | AP3512HX-J70(TX) | ● | 12 | 0.09 | 1.08 | 10500 | 0.116 | 4.10 | 0.151 | 3.78 | 32.0 | |

Specifications subject to change without notice.

The specification for bearing type is for reference only, for more bearing types information, please contact with your ADDA sales representative, thanks!!
 (網頁上呈現產品軸承資訊均以參考為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝!!)

*Motor protective circuit and third lead wire functions

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| 0 | 1 | 2 | 3 | 4 | 6 | 7 | 8 | 9 | A | B |
| ✓ | | | | | | | | | | |

*Safety approvals

| | | | | |
|---|---|--|---|---|
| | | | | |
| ✓ | ✓ | | ✓ | ✓ |