RGZE1S35M





Main

Range of product	Zelio Relay
Product or component type	Socket
Contact terminal arrangement	Separate

Complementary

Product compatibility	RXG plug-in relay 1 C/O
[Ui] rated insulation voltage	250 V
[Uimp] rated impulse withstand voltage	6 kV
Line Rated Current	10 A
System Voltage	250 V conforming to IEC 300 V conforming to UL
Connections - terminals	Screw terminals, clamping capacity: 1 x 0.251 x 2.5 mm² (AWG 22AWG 14) flexible with cable end Screw terminals, clamping capacity: 2 x 0.252 x 1 mm² (AWG 22AWG 17) flexible with cable end Screw terminals, clamping capacity: 2 x 0.52 x 1.5 mm² (AWG 20AWG 16) solid without cable end Screw terminals, clamping capacity: 1 x 0.51 x 2.5 mm² (AWG 20AWG 14) solid without cable end
Screw type	M3

Environment

ambient air temperature for storage	-40185 °F (-4085 °C)
ambient air temperature for operation	-40158 °F (-4070 °C)
relative humidity	1085 %
standards	IEC 61984 UL 508 CSA C22.2 No 14
product certifications	CE CSA RoHS UL REACH EAC China RoHS
IP degree of protection	IP20
overvoltage category	III
pollution degree	3

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1426 - Schneider Electric declaration of conformity	Compliant - since 1426 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available

California to cause cancer, and


Di-isodecyl phthalate (DIDP), which is known to the StateDi-isodecyl phthalate (DIDP), which is known to the State of California to cause birth of California to cause birth defects or other reproductive defects or other reproductive harm.

harm.

For more information go to www.p65warnings.ca.gov

For more information go to www.p65warnings.ca.gov

Dimensions

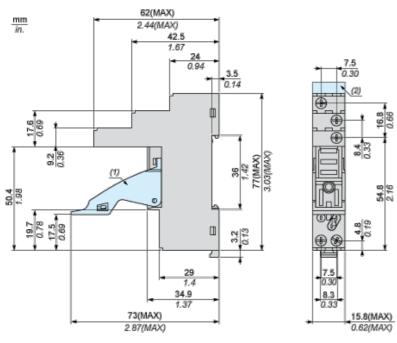

- (1) Maintaining clamp
- (2) Legends

Wiring Diagram

