
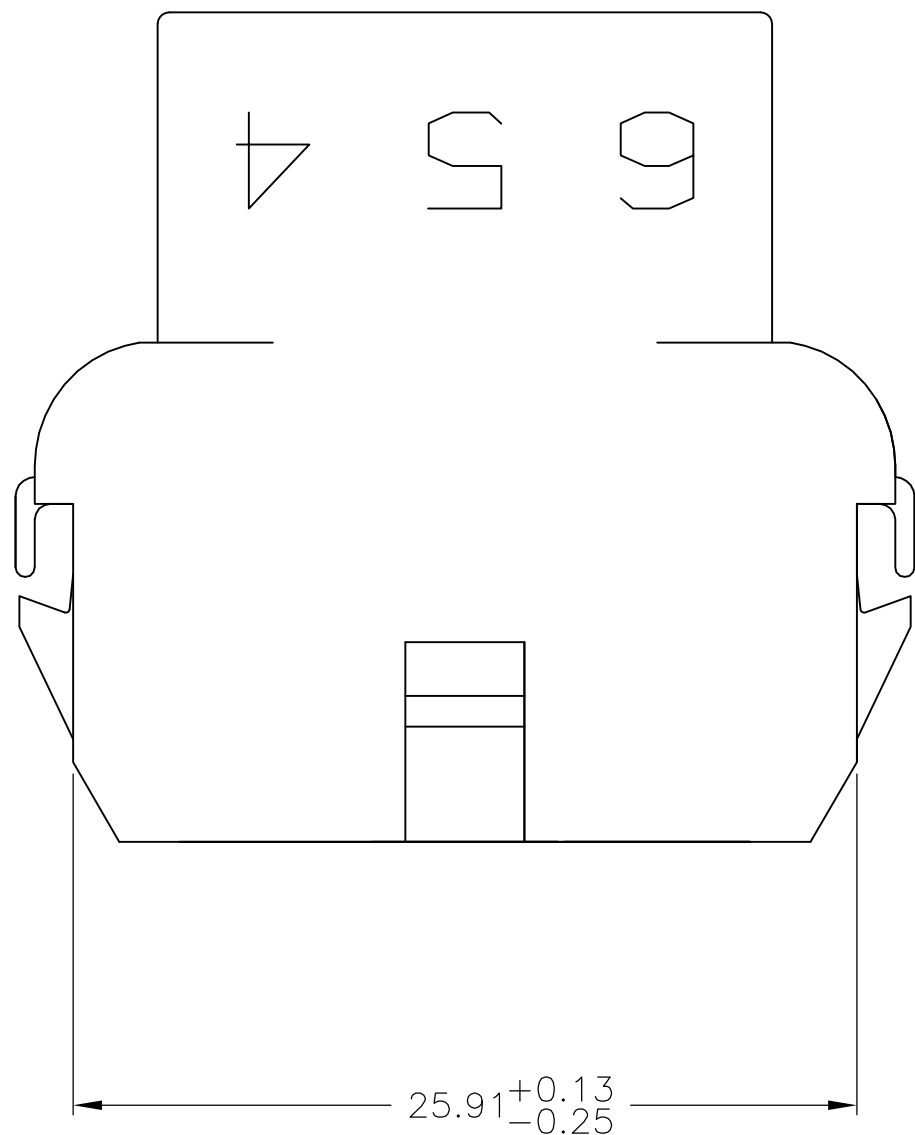
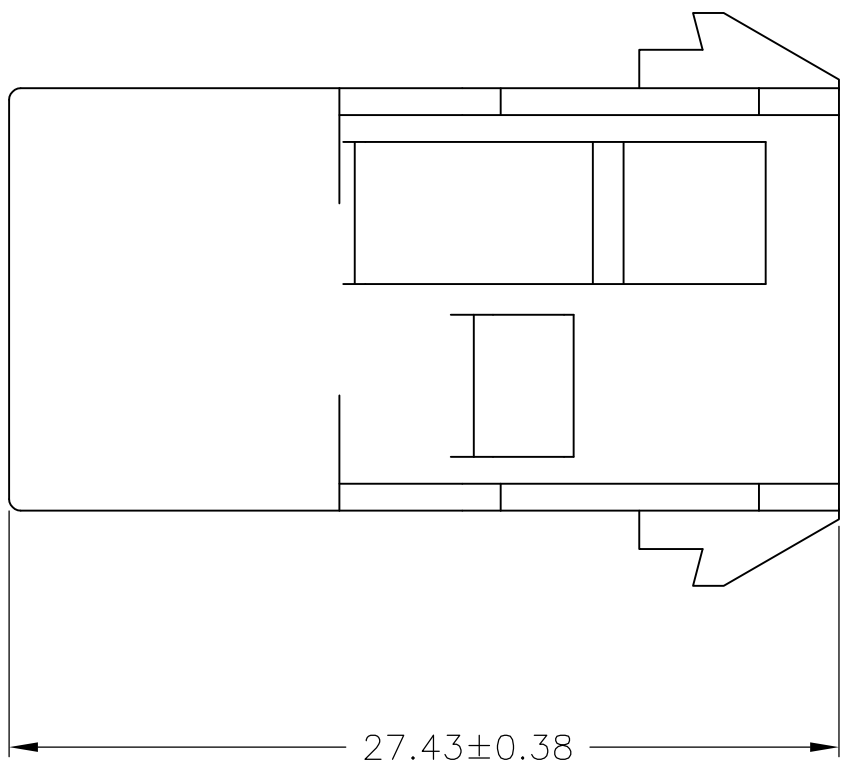
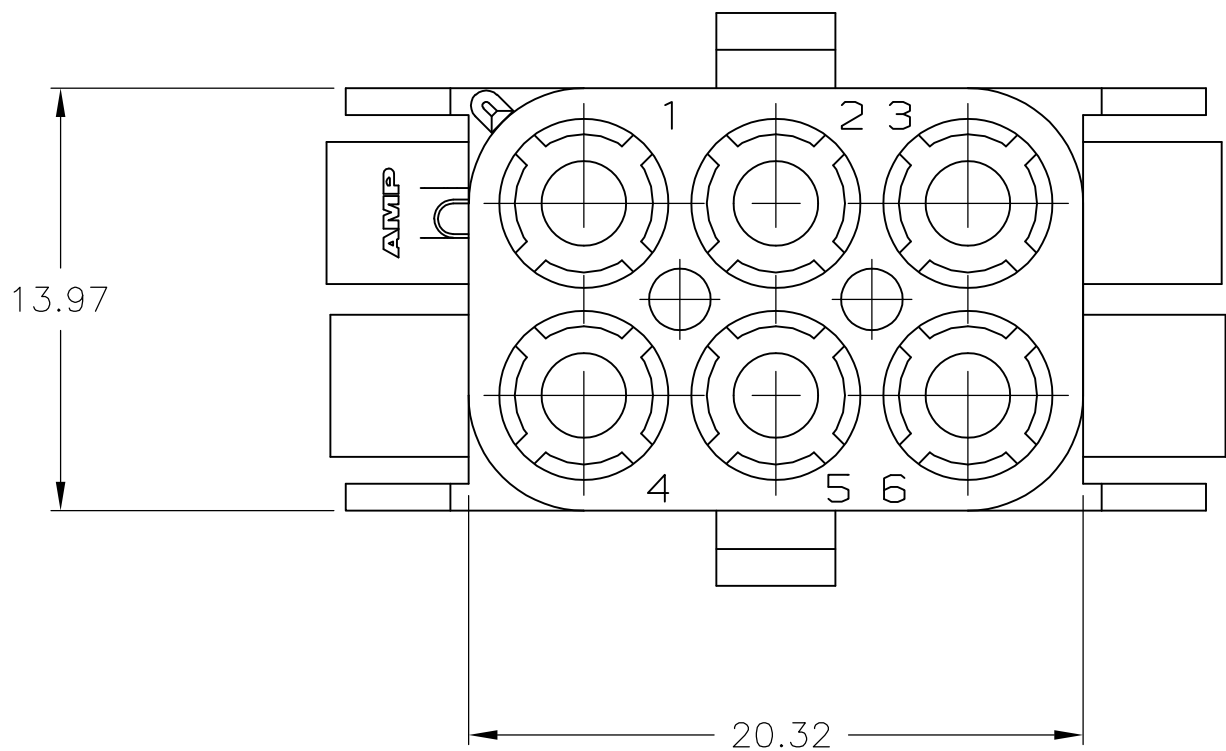
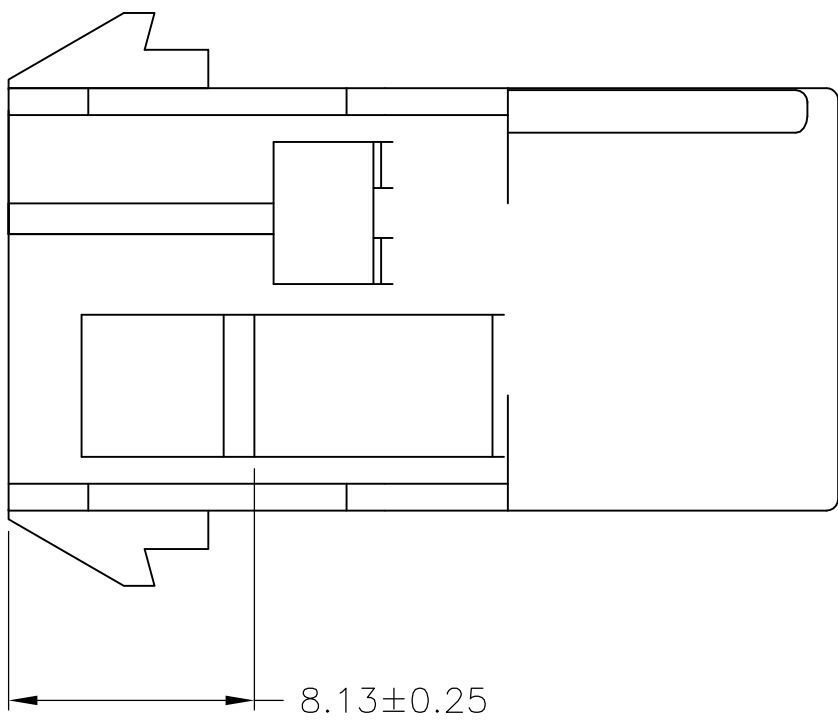


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		—	SEE SHEET 1	—	—	—

- 1
- STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE); CLARIFICATION MARKS UNDER THE 6 & 9.
- 2
- CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
- 3
- VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

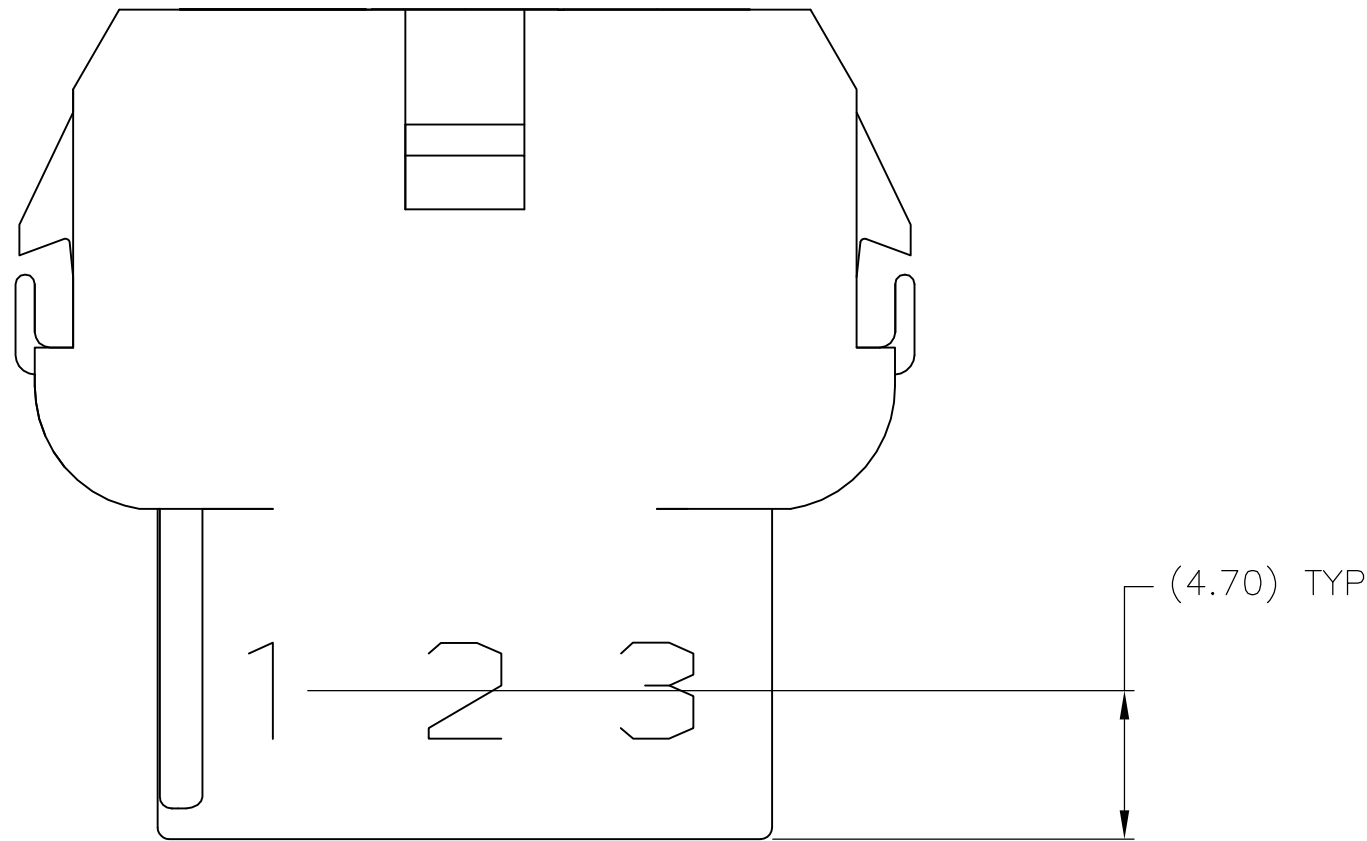

5.08	.200	-	-
4.70	.185	27.43	1.080
3.18	.125	25.91	1.020
0.38	.015	20.32	.800
0.25	.010	13.97	.550
0.13	.005	8.13	.320
MM	IN	MM	IN

CONVERSION TABLE

NATURAL	2-480705-0
COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN K. WHITAKER	28JUL04	 TE Connectivity			
			CHK S. RIDGILL	28JUL04				
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL	28JUL04	NAME	CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™	
		1 PLC ± -		PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO
		1 PLC ± -		APPLICATION SPEC				
		2 PLC ± 0.127				A1	00779	C480705
		3 PLC ± -						
		4 PLC ± -				RESTRICTED TO		
MATERIAL		FINISH		WEIGHT		SCALE		
-		-		-		4:1		
CUSTOMER DRAWING						SHEET		
						2 OF 2		
						REV. AP4		