

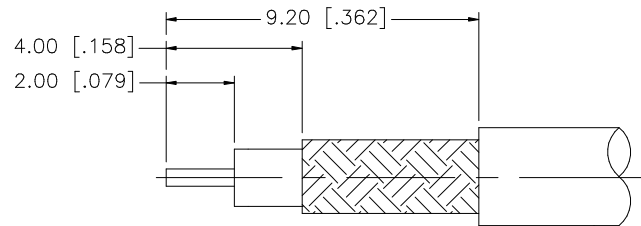
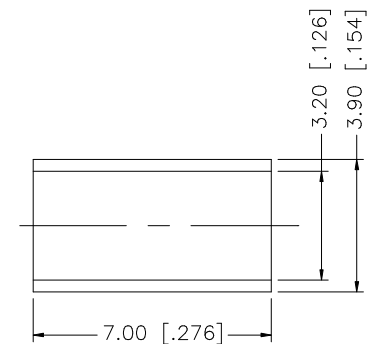


REV.	DATE	DESCRIPTION
NC	01/29/07	INITIAL RELEASE

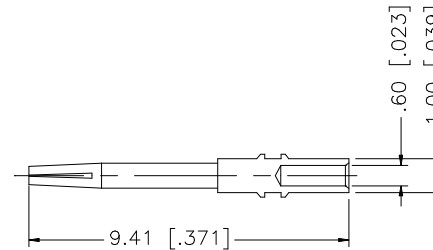

RECOMMENDED
CABLE STRIPPING DIM'S

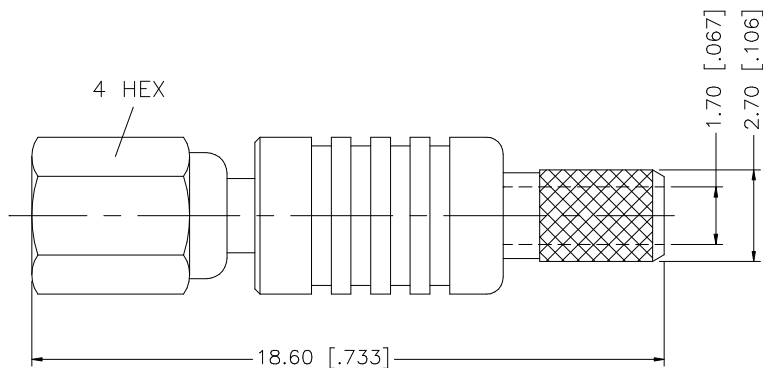

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex									
8						DRAWN	G.R.S.							01/29/07			
7						CHECKED											
6						ISSUED			PART DESCRIPTION								
5						SHEET	1 OF 1		SSMC CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U)								
4									PART NO.								
3	CONTACT PIN	BER. COPPER	GOLD	1					153100								
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO.								
1	BODY	BRASS	GOLD	1					SCALE								
	DESCRIPTION	MATERIAL	FINISH	QTY		C:/153/153100.DWG			DWG. NO.		153100.DWG		REV.	NC	SIZE	A	SCALE