



- **Easy to use: Just twist on wire!**
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13" (3,2 mm) to 7.00" (177,8 mm) diameters.
- For hose and cable **clamps**, see pages 7-30 through 7-35.

Heyco® SunWrap™ - Polyethylene

| BUNDLE RANGE | | | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | | | |
|------------------|------|------------------|-------|-------------|-------------|-------------|--------------------|------|---------|------|-------------|-----|
| Minimum Diameter | | Maximum Diameter | | UV Black | Natural | | A Outside Diameter | | B Pitch | | C Thickness | |
| in. | mm. | in. | mm. | | | in. | mm. | in. | mm. | in. | mm. | |
| .13 | 3,2 | 1.50 | 38,1 | 8904 | 8905 | CW 187 PE* | .19 | 4,8 | .25 | 6,3 | .03 | 0,8 |
| .19 | 4,8 | 2.00 | 50,8 | 8908 | 8909 | CW 250 PE | .25 | 6,3 | .38 | 9,5 | .05 | 1,1 |
| .31 | 7,9 | 3.00 | 76,2 | 8912 | 8913 | CW 375 PE | .38 | 9,5 | .44 | 11,1 | .05 | 1,3 |
| .38 | 9,5 | 4.00 | 101,6 | 8916 | 8917 | CW 500 PE | .50 | 12,7 | .50 | 12,7 | .06 | 1,6 |
| .50 | 12,7 | 4.50 | 114,3 | 8920 | 8921 | CW 625 PE* | .63 | 15,9 | .63 | 15,9 | .06 | 1,6 |
| | | 5.00 | 127,0 | 8924 | 8925 | CW 750 PE | .75 | 19,1 | .75 | 19,1 | .07 | 1,7 |
| 1.00 | 25,4 | 7.00 | 177,8 | 8928 | 8929 | CW 1000 PE | 1.00 | 25,4 | 1.00 | 25,4 | .08 | 2,0 |

Standard colors UV black or natural.
* Parts are not UR recognized.


Material
Certifications



Polyethylene
Recognized under the Component Program of Underwriters' Laboratories File E173954


Conforms to:
Temperature Range

Fed Spec LP390, Mil I-631D, Mil P-21922B
-76°F (-60°C) to 190°F (88°C) - UL rated temp not to exceed 122°F (50°C)

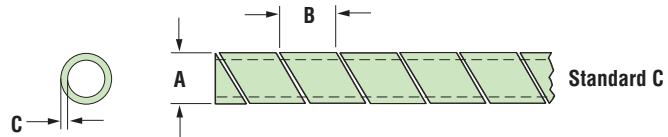

Heyco® SunWrap™ - Heavy Duty Cable Guard

| BUNDLE RANGE | | | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | | | |
|------------------|------|------------------|------|-------------|--|-------------|-----------------|------|---------|------|-------------|-----|
| Minimum Diameter | | Maximum Diameter | | Black | | | A Outside Dia. | | B Pitch | | C Thickness | |
| in. | mm. | in. | mm. | | | in. | mm. | in. | mm. | in. | mm. | |
| .75 | 19,1 | 1.50 | 38,1 | 8964 | | CWG 99 PE | .93 | 23,6 | .95 | 24,1 | .12 | 3,0 |
| 1.00 | 25,4 | 2.00 | 50,8 | 8966 | | CWG 126 PE | 1.12 | 28,4 | 1.25 | 31,8 | .13 | 3,3 |
| 1.25 | 31,8 | 2.50 | 63,5 | 8968 | | CWG 153 PE | 1.37 | 34,8 | 1.35 | 34,3 | .14 | 3,5 |
| 1.50 | 38,1 | 3.00 | 76,2 | 8970 | | CWG 181 PE | 1.62 | 41,1 | 1.50 | 38,1 | .15 | 3,9 |
| 2.00 | 50,8 | 3.50 | 88,9 | 8972 | | CWG 234 PE | 2.09 | 53,1 | 1.60 | 40,6 | .17 | 4,3 |

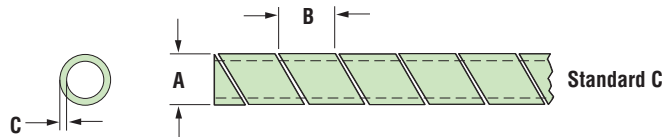

- **Easy to use: Just twist on wire!**
- Designed to shield heavier cables and cable bundles; **extend cable life.**
- Available in a **variety of sizes** that fit cable and cable bundles from .75" (19.1 mm) to 3.50" (88.9 mm) in diameter.
- **Smooth finished interior wall.**
- **Highly flexible** for ease of movement.
- Packaged as one continuous piece, not spooled.
- May be **cut to desired length**, please consult Heyco.

Quick Specs

Material: High Density Polyethylene
Flammability Rating: 94-HB
Temperature Range: 0°F (-18°C) to 165°F (74°C)