

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0850130012](#)
Status: **Active**
Overview: [din_41612](#)
Description: 2.54mm (.100") Pitch DIN 41612 Header, Through Hole, Vertical, Style R Reverse, 64 Circuits, 0.6µm (24µ") Selective Gold (Au), Lead free

Documents:
[3D Model](#) [Product Specification PS-85013-0001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General


Product Family Backplane Connectors
Series [85013](#)
Application Backplane
Comments No Mounting Clips. No Flux Proof
Component Type PCB Header
Overview [din_41612](#)
Product Name IEC 603-2/DIN 41612
Style R

Physical

Circuits (Loaded) 64
Circuits (maximum) 96
Circuits Detail Rows A & C
Durability (mating cycles max) 400
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part Yes
Number of Columns 32
Number of Pairs Open Pin Field
Number of Rows 3
Orientation Vertical
PC Tail Length (in) 0.177 In
PC Tail Length (mm) 4.50 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.062 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Pitch - Term. Interface (in) 0.100 In
Pitch - Term. Interface (mm) 2.54 mm
Plating min: Mating (µin) 24
Plating min: Mating (µm) 0.6
Surface Mount Compatible (SMC) No
Temperature Range - Operating -55°C to +125°C

Electrical

Current - Maximum per Contact 2.5A
Data Rate 622.0 Mbps

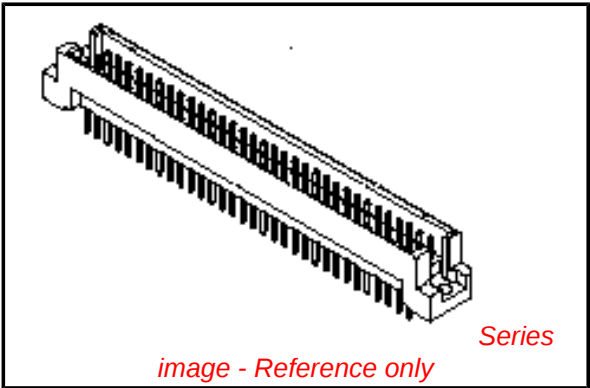

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[85013Series](#)

Mates With
[85042](#) DIN 41612 Receptacle . [85052](#) DIN
41612 Header

Voltage - Maximum	1000V (RMS)
Solder Process Data	
Lead-free Process Capability	Wave Capable (TH only)
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-85013-0001
Sales Drawing	SD-85013-0012, SDA-85013-0001, SDA-85013-0012

This document was generated on 05/17/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

A = 64 STANDARD CONTACTS L = 4.5


A	G2/0	dI-32	cI-32
CONTACT SYMBOL	PERFORMANCE LEVEL	CONTACT POSITION NUMBER	

2d-border.DGN REV A
96/06/12 LEVEL 6







Section A - B
5:1

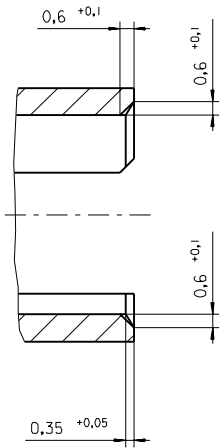

View X
5:1

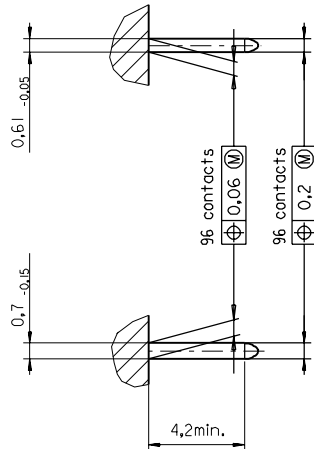

View W
5:1

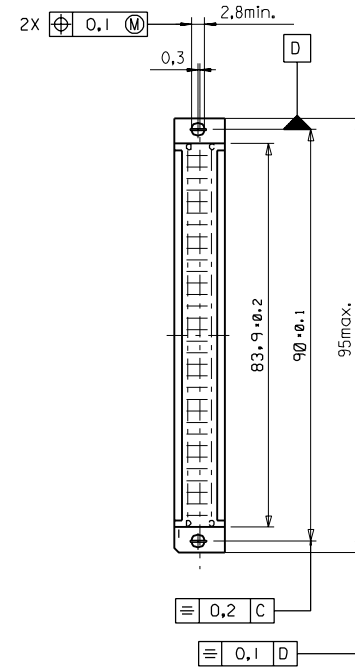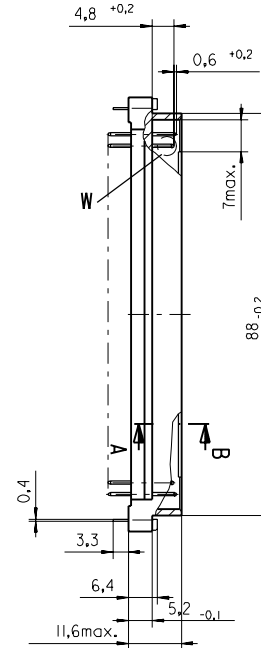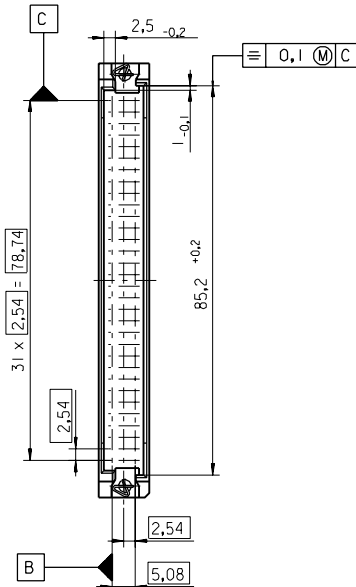

FIRST ANGLE PROJECTION

REVISE ONLY ON CAD SYSTEM

SH. REV.

UNLESS OTHERWISE SPECIFIED
TOLERANCES: ANGULAR $\pm 2^\circ$

	INCH	METRIC
3 PLACE	$\pm .$	$\pm$
2 PLACE	$\pm .$	$\pm$
1 PLACE	$\pm .$	$\pm$

DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

DESIGN DIMENSION ☒ MM
☐ IN.

EQUIVALENT DIMENSION ☐ MM
☐ IN.

IF TWO DIMENSIONS ARE SHOWN THE UPPER IS
THE DESIGN DIMENSION, LOWER IS SECONDARY

DRWG
BY

Ca

CHK'D
BY

KN

APP'D
BY

SCALE

1:1

SIGN

SIGN

SIGN

SCALE

SCALE

SCALE

SCALE

CAD/CAM PROJECT NAME
85013000
611

TITLE

96 pos. Male connector

acc. DIN 41612 Style R

Dimensions

MOLEX EUROPE

MOLEX EUROPE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO
MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SHEET NO. DATE

1 OF 95/06/07

SIZE

SDA-85013-0001

SIZE

SIZE

first release
see ECN No. 1887

LTR

LTR

[illegible][illegible][illegible][illegible][illegible][illegible][illegible]