


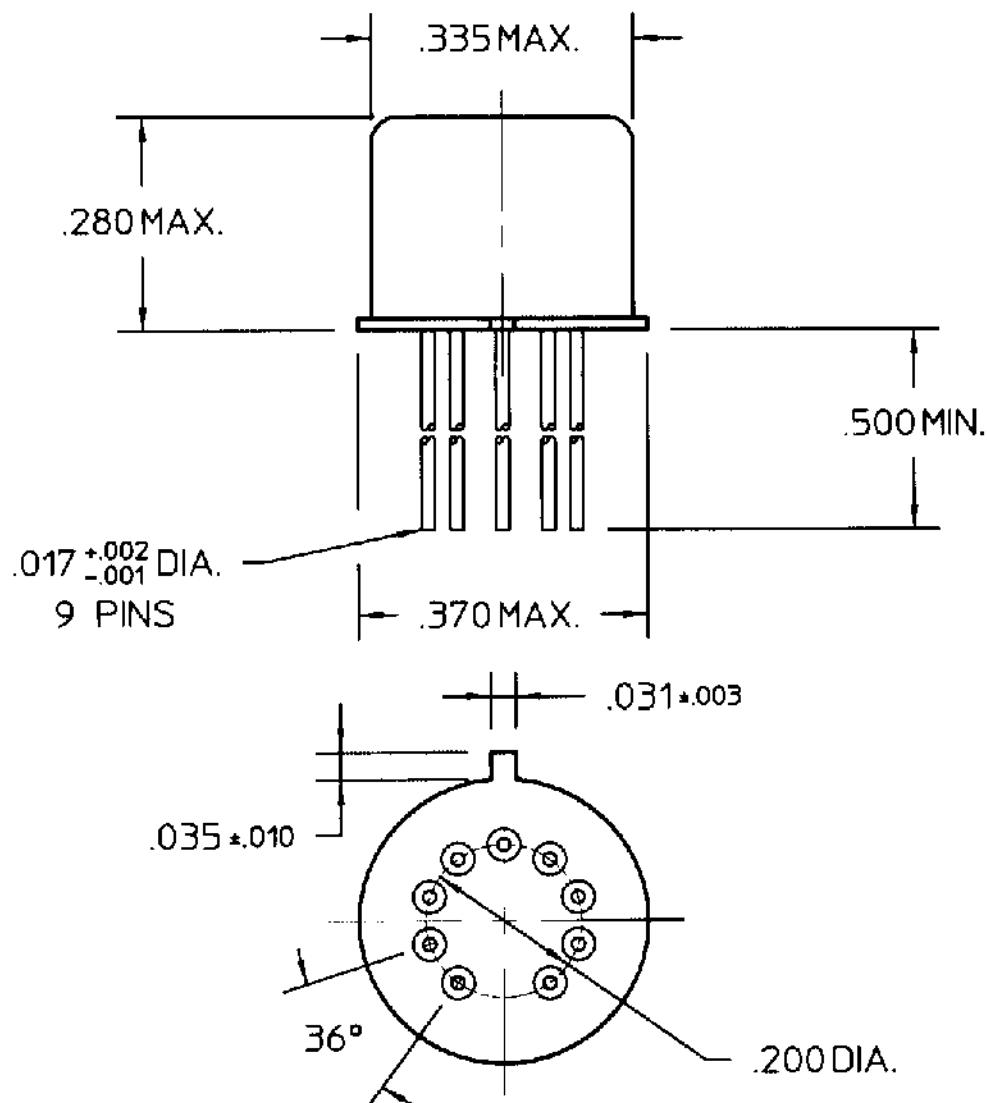

REV. 0

DCO 141534


COIL: @ 25°C  
 RESISTANCE \_\_\_\_\_ 1560 OHMS ±10%  
 NOMINAL VOLTAGE \_\_\_\_\_ 26.5 VDC  
 MUST OPERATE \_\_\_\_\_ 14.2 VDC  
 \_\_\_\_\_ TURN-ON BASE CURRENT 0.13 mADC  
 MUST RELEASE \_\_\_\_\_ 8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:

VIBRATION \_\_\_\_\_ 10 \_\_\_\_\_ CPS TO \_\_\_\_\_ 3000 \_\_\_\_\_ CPS @ \_\_\_\_\_ 30 \_\_\_\_\_ g's  
 SHOCK \_\_\_\_\_ 75 \_\_\_\_\_ g's \_\_\_\_\_ 6 \_\_\_\_\_ MS. DURATION  
 TEMPERATURE \_\_\_\_\_ -65 \_\_\_\_\_ °C TO \_\_\_\_\_ +125 \_\_\_\_\_ °C

NOTES: \_\_\_\_\_ TURN-ON TIME 2.0 MS MAX  
 \_\_\_\_\_ TURN-OFF TIME 7.5 MS MAX  
 \_\_\_\_\_ CONTACT STABILIZATION TIME 2.0 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: \_\_\_\_\_ LOW LEVEL TO 1A  
 \_\_\_\_\_ 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 12/3/99

CK. *[Signature]* 12/3/99



COMMUNICATIONS  
 INSTRUMENTS, INC.

CUST. \_\_\_\_\_ QPL  
 CUST. NO. M28776/1-030M REV. \_\_\_\_\_

JMAT RELAY

JMACT-26XM