


FEMALE PROTECTIVE CAP WITH CHAIN

R161.841.000 SERIES N

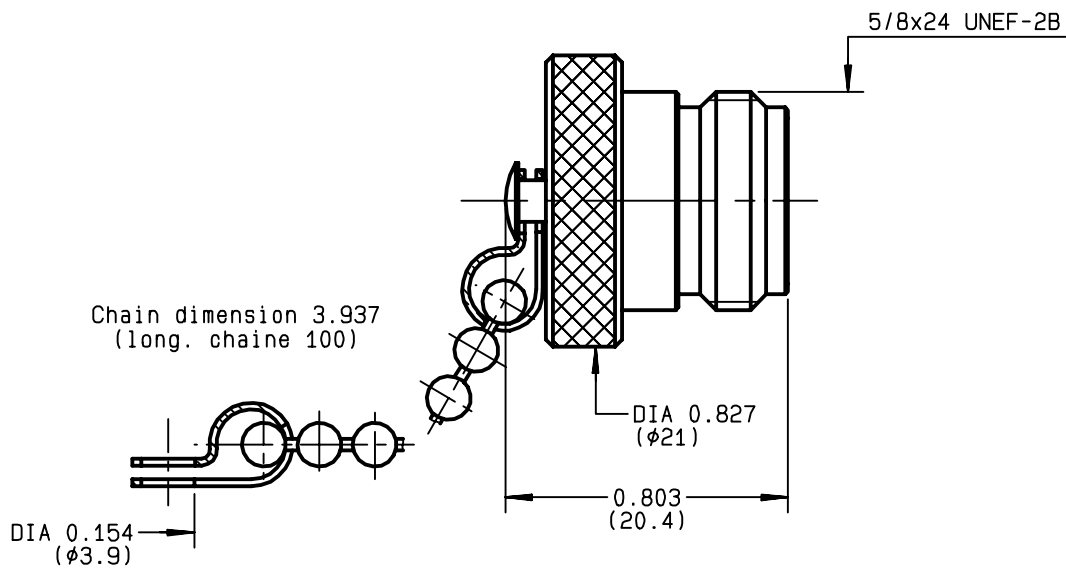

NOMINAL IMPEDANCE	NA	Ω	CABLES :		
FREQUENCY RANGE	NA	GHz			
TEMPERATURE RATING	-55/+155	$^{\circ}\text{C}$			
V.S.W.R	NA	+ x F (GHz)Maxi			
RF INSERTION LOSS	NA	$\sqrt{F}$ (GHz) dB Maxi			
VOLTAGE RATING	NA	Veff Maxi			
DIELECTRIC WITHSTANDING VOLTAGE	NA	Veff Mini			
INSULATION RESISTANCE	NA	M Ω Mini	OTHERS CHARACTERISTICS		
HERMETIC SEAL	NA	Atm.cm ³ /s	CABLE RETENTION	NA	N Mini
LEAKAGE (pressurized only)	NA		CENTER CONTACT RETENTION		
MECHANICAL DURABILITY	500	Cycles	Axial force - mating end	NA	N Mini
WEIGHT	29.5	gr	Axial force - opposite end	NA	N Mini
			Torque	NA	cm.N Mini
SPECIFICATION			RECOMMENDED TORQUES		
			Mating	NA	cm.N
			Panel nut	NA	cm.N
			Clamp nut	NA	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given) in micrometers
BODY	BRASS	BBR 2	
OUTER CONTACT			
CENTER CONTACT			
INSULATOR		-	
GASKET		-	
OTHERS PIECES	BRASS	BBR 2	

ISSUE	CREATION DATE	FILE PART-NUMBER
9726U00	17/06/1993	



The information given here is subject to change without notice.
Design changes may be in order to improve the product .

Connect to the future