

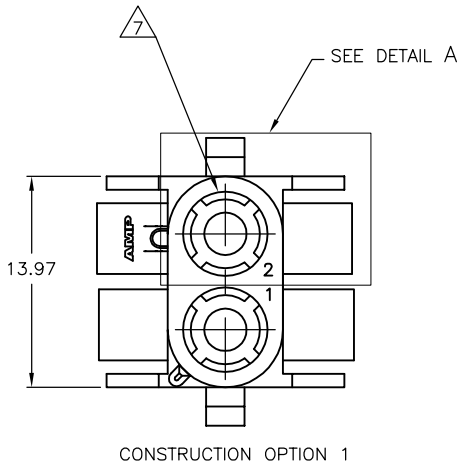
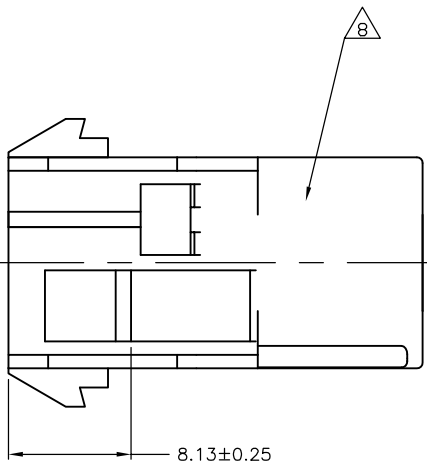


REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APP'D
AG8	13DEC2017	REVISED ECR-17-018148	SC	BH	


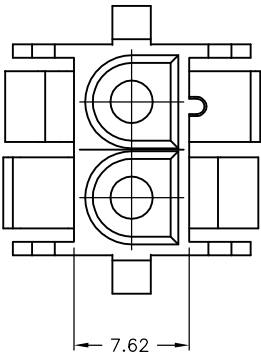


- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
- RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
- PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- OPTIONAL FOR KEYING HOUSING IN PANEL.
- CIRCUIT NUMBER 1 LOCATION.
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- CONSTRUCTION OPTION 1 ONLY ALLOWED
CONSTRUCTION OPTIONS 2 AND 3 NOT PERMISSIBLE
- PREPRODUCTION- FASR REQUIRED
- MATERIAL: PA66, UL94 V-0, GWIT 775°C

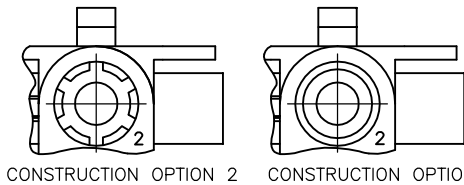


CONSTRUCTION OPTION 2 CONSTRUCTION OPTION 3

DETAIL A
OPTIONAL CONSTRUCTIONS

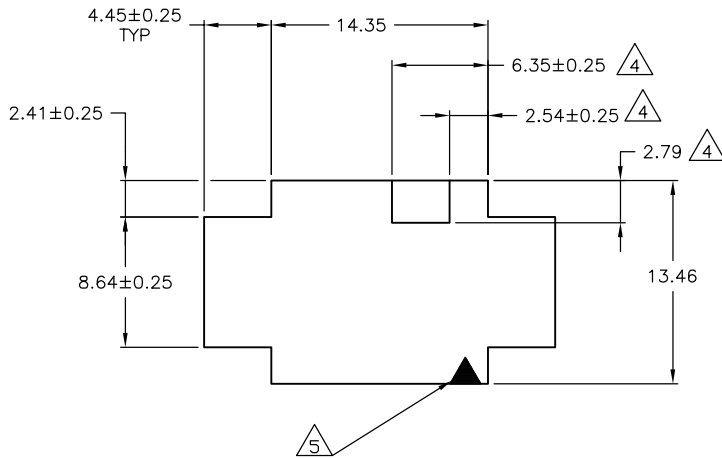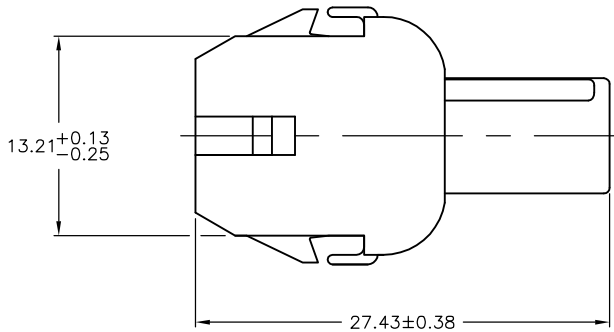

RECOMMENDED PANEL CUTOUT

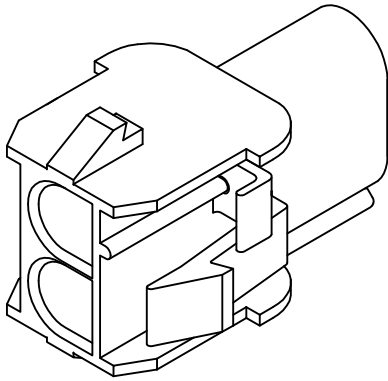

3-DIMENSIONAL MODEL
NTS

4.45	.175	27.43	1.080
2.79	.110	14.35	.565
2.54	.100	13.97	.550
2.41	.095	13.46	.530
2.29	.090	13.21	.520
0.76	.030	8.64	.340
0.38	.015	8.13	.320
0.25	.010	7.62	.300
0.13	.005	6.35	.250
MM	IN	MM	IN

CONVERSION TABLE

12	NATURAL	3-480699-0
10	NATURAL	2-480699-0
	BLACK	1-480699-9
	GREY	1-480699-8
	BLUE	1-480699-6
	GREEN	1-480699-5
	YELLOW	1-480699-4
	ORANGE	1-480699-3
	RED	1-480699-2
	BROWN	1-480699-1
	NATURAL	1-480699-0
	COLOR	PART NO.

9 SUPERSEDED BY 1-480699-0
10 OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 24JUL92	TE Connectivity	
DIMENSIONS: mm		CHK R. SWING 24JUL92	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		AP'D D. SELF 27JUL92	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		SIZE
1 PLC ± -		WEIGHT		CAGE CODE
2 PLC ± 0.13		CUSTOMER DRAWING		DRAWING NO
3 PLC ± -		SCALE 4:1		SHEET 1 of 1
4 PLC ± -		REV AG8		RESTRICTED TO
ANGLES ± 1° 0'				
FINISH -				
MATERIAL NYLON, UL94 V-2				