
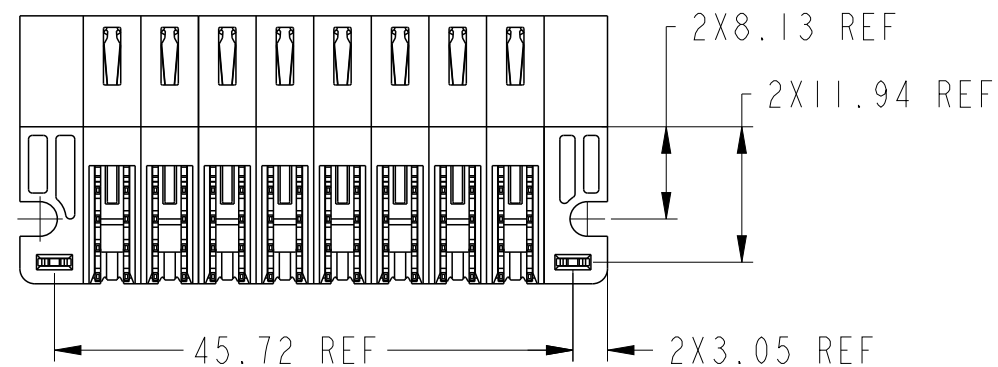
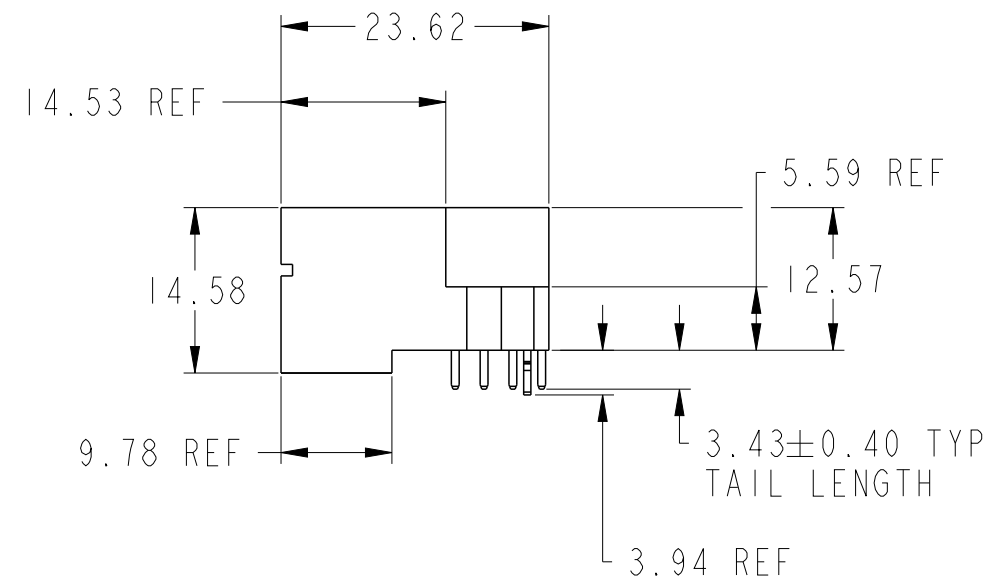
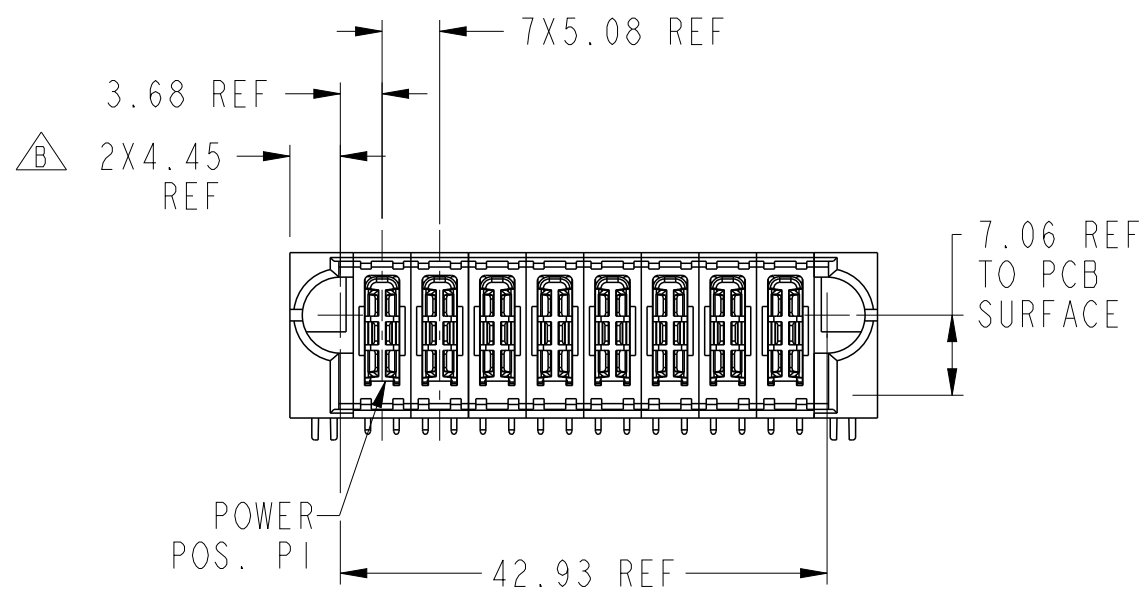


PRODUCT NUMBER SEE SHEET 2

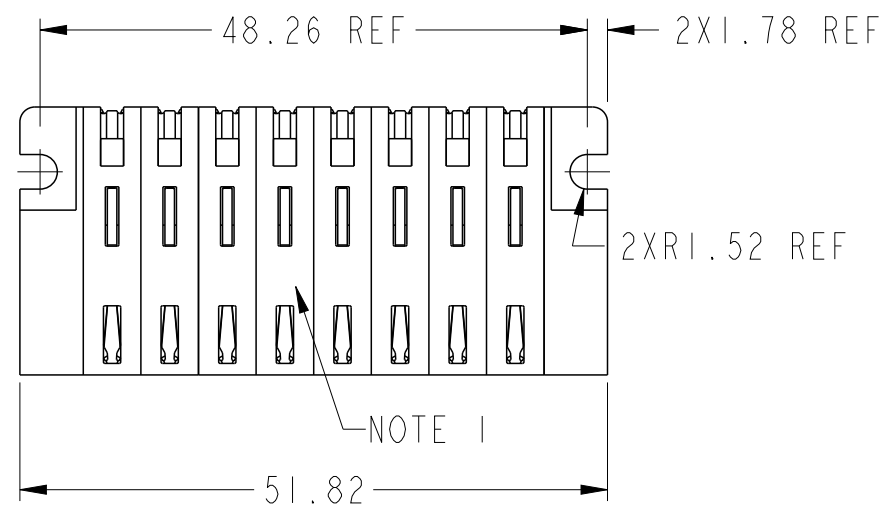

spec ref *				dr Peng-Bing Fu		2012/04/23		projection	MM	size A3		scale 3:2		
tolerance std				eng Peng-Bing Fu		2012/11/14				ecn no ELX-DG-013143-1				
ASME Y14.5				chr Shao-Qi Kuang		2012/11/15				rel level Released				
				appr Pei-Ming Zheng		2012/11/15				product family PwrBlade+				
surface		linear	0.X	±0.5		title 8HDP RA STB HEADER				dwg no 10106132-8000001		rev B		
			0.XX	±0.25										
			0.XXX	±0.10										
ASME Y14.5		angular	0°	±2°	www.fci.com		cat. no.		Product - Customer Drw				sheet 1 of 3	

A

B

C

D

A

B

C


D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
-  9) A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.



Copyright FCI.

dr	Peng-Bing Fu	2012/04/23	projection 	MM 	size	A3	scale	3:2	
eng	Peng-Bing Fu	2012/11/14							
chr	Shao-Qi Kuang	2012/11/15							
appr	Pei-Ming Zheng	2012/11/15	product family		PwrBlade+	ecn no	ELX-DG-013143-1		
					rel level	Released			
			title		8HDP			rev	
			RA STB HEADER		dwg no			B	
www.fci.com			cat. no.		Product - Customer Drw			sheet 3 of 3	
					10106132-8000001				