

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0464371003
Status: Active
Overview: EXTreme Ten60Power™ High-Current Connector
Description: 2.54mm, 5.50mm Pitch EXTreme Ten60Power™ Right Angle Plug Assembly with Guide Pins, 24 Signal Circuits, 6 Power Circuits

Documents:

[Drawing \(PDF\)](#) [Application Specification AS-46436-100 \(PDF\)](#)
[Product Specification PS-46436-100 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
TUV R72081037
UL E29179

General

Product Family PCB Headers
Series 46437
Application Board-to-Board, Power, Signal
Comments See PS-46436-100 for details
Overview EXTreme Ten60Power™ High-Current Connector
Product Name EXTreme Ten60Power™
UPC 800756953847

Physical

(p)ower-(s)ignal Configuration 6p - 24s
Breakaway No
Circuits (Loaded) 30
Circuits (maximum) 30
Color - Resin Black
Durability (mating cycles max) 200
First Mate / Last Break No
Flammability 94V-0
Glow-Wire Compliant No
Guide to Mating Part Yes
Keying to Mating Part None
Lock to Mating Part No
Mated Height 18.00mm
Material - Metal Copper
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 23.629/g
Number of Rows 1
Orientation Right Angle
PC Tail Length 2.84mm
PCB Locator Yes
PCB Retention None
PCB Thickness - Recommended 1.58mm
Packaging Type Tray
Pitch - Mating Interface 2.54mm, 5.50mm
Polarized to Mating Part Yes
Polarized to PCB Yes
Shrouded No
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -40°C to +105°C

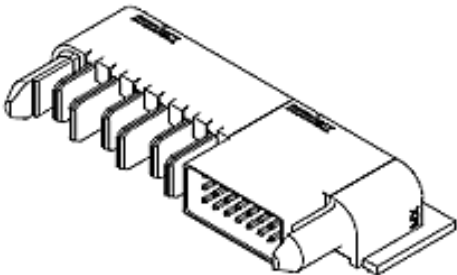

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Contains SVHC(2014
December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product
environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

46437 Series

Mates With

46562-1003 EXTreme Ten60Power™
Vertical Receptacle, 46436-1003 EXTreme
Ten60Power™ Right Angle Receptacle

Termination Interface: Style	Through Hole - Compliant Pin
Electrical	
Current - Maximum per Contact	2.5A, 60.0A
Voltage - Maximum	600V AC / 250V DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	040
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-46436-100
Product Specification	PS-46436-100
Sales Drawing	SD-46437-103

This document was generated on 07/27/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION