

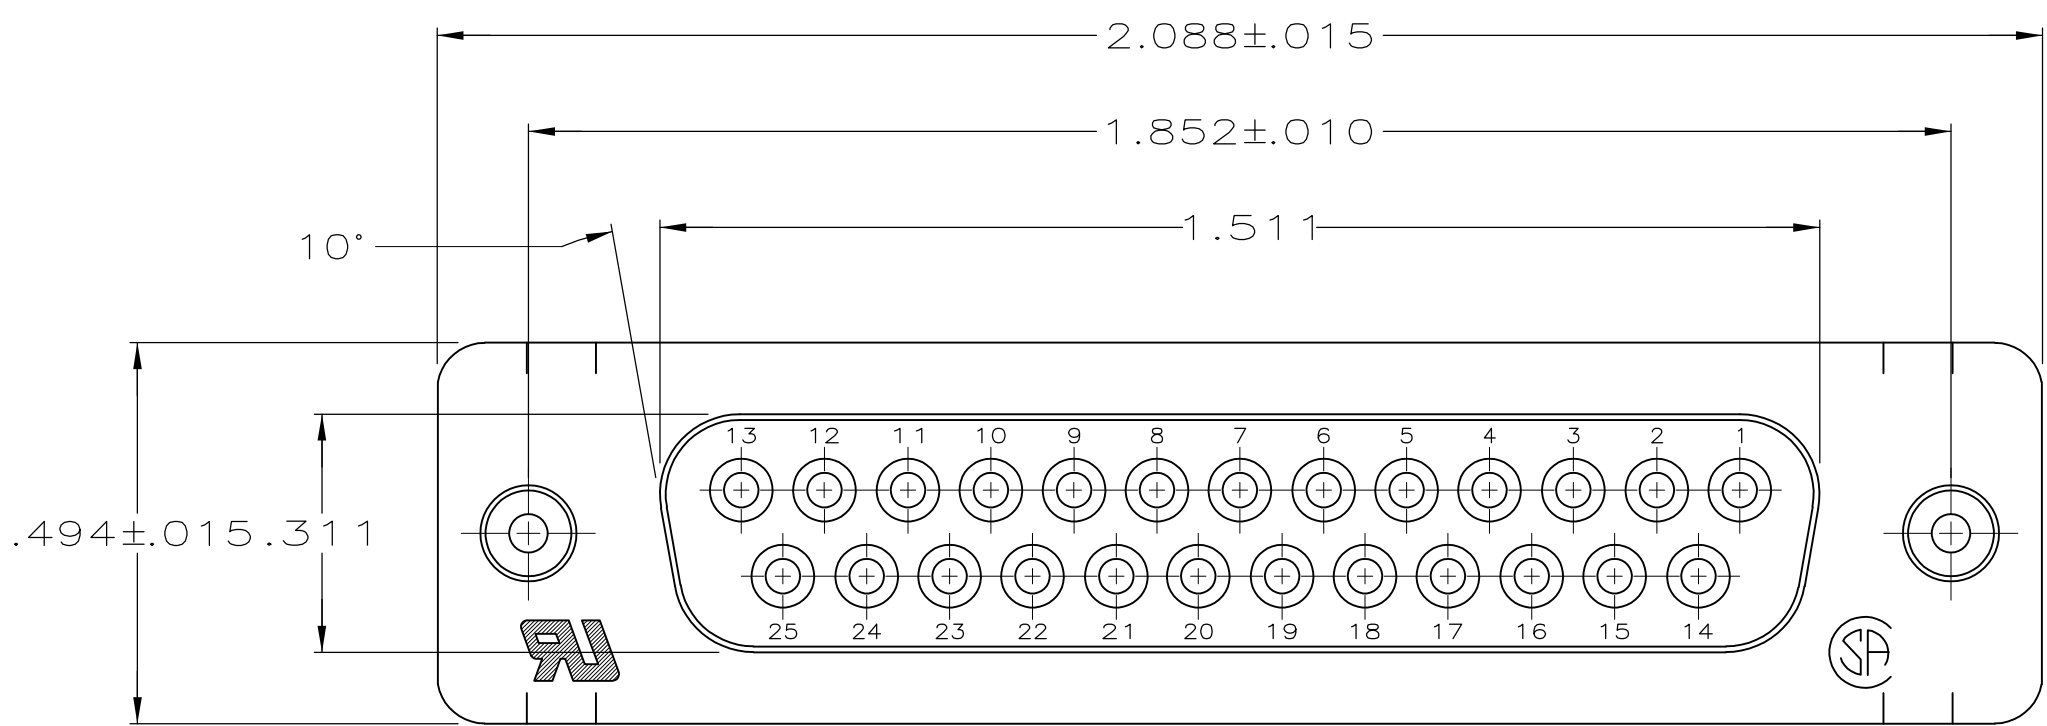


REVISIONS					
REV	LTR	DESCRIPTION	DATE	OWN	APVD
B		REVISED PER ECO-16-001548	23FEB2016	AP	DG

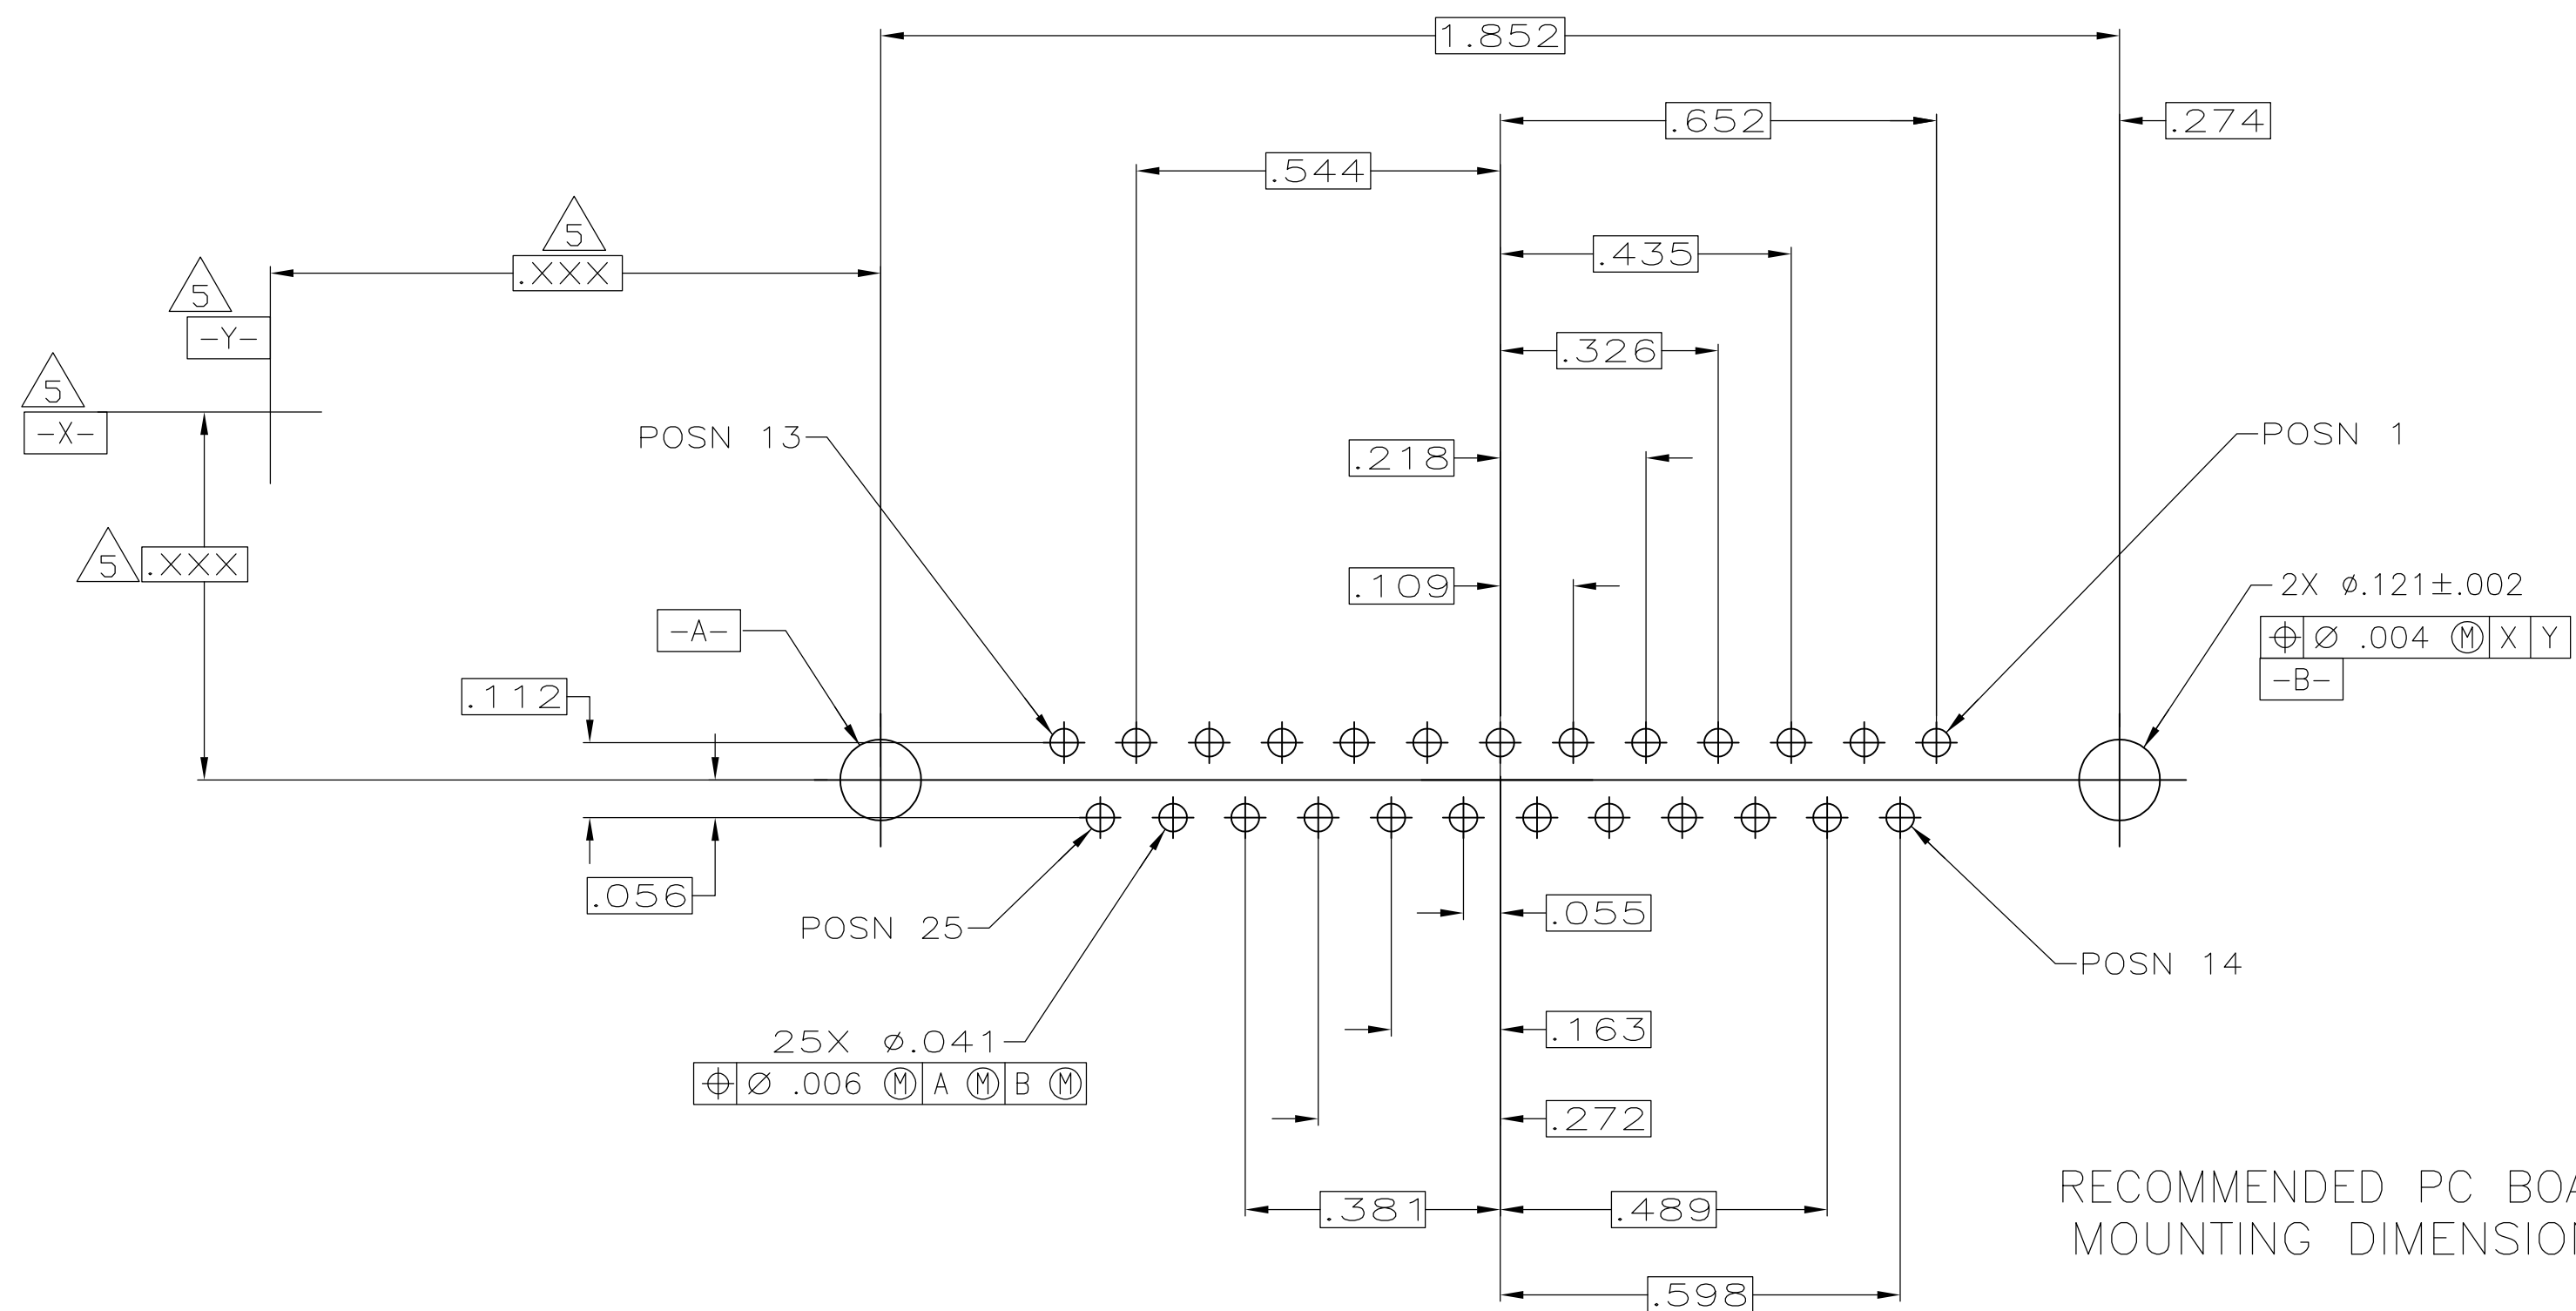

- 1 HOUSING: FLAME RETARDANT, 94V-0 RATED, THERMOPLASTIC;
COLOR: BLACK
SHELL: CARBON STEEL
CONTACTS: PHOS BRONZE.
INSERT BOARDLOCKS: BRASS.
- 2 SHELL: .000200 MIN TIN OVER .000100 MIN COPPER.
CONTACTS: SEE TABLE.
INSERT BOARDLOCKS: .000150 MIN TIN OVER .000100 MIN COPPER.
- 3 GOLD FLASH FOR LENGTH OF .100 MIN FROM MATING
END, .000100 MIN TIN ON TERMINATION END, ALL OVER .000050
MIN NICKEL ON ENTIRE CONTACT.
- 4 .000030 MIN GOLD FOR LENGTH OF .100 MIN FROM MATING
END, .000100 MIN TIN ON TERMINATION END, ALL OVER .000050
MIN NICKEL ON ENTIRE CONTACT.
- 5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 .110 MAX IN SHELL TAB CLINCH AREAS.

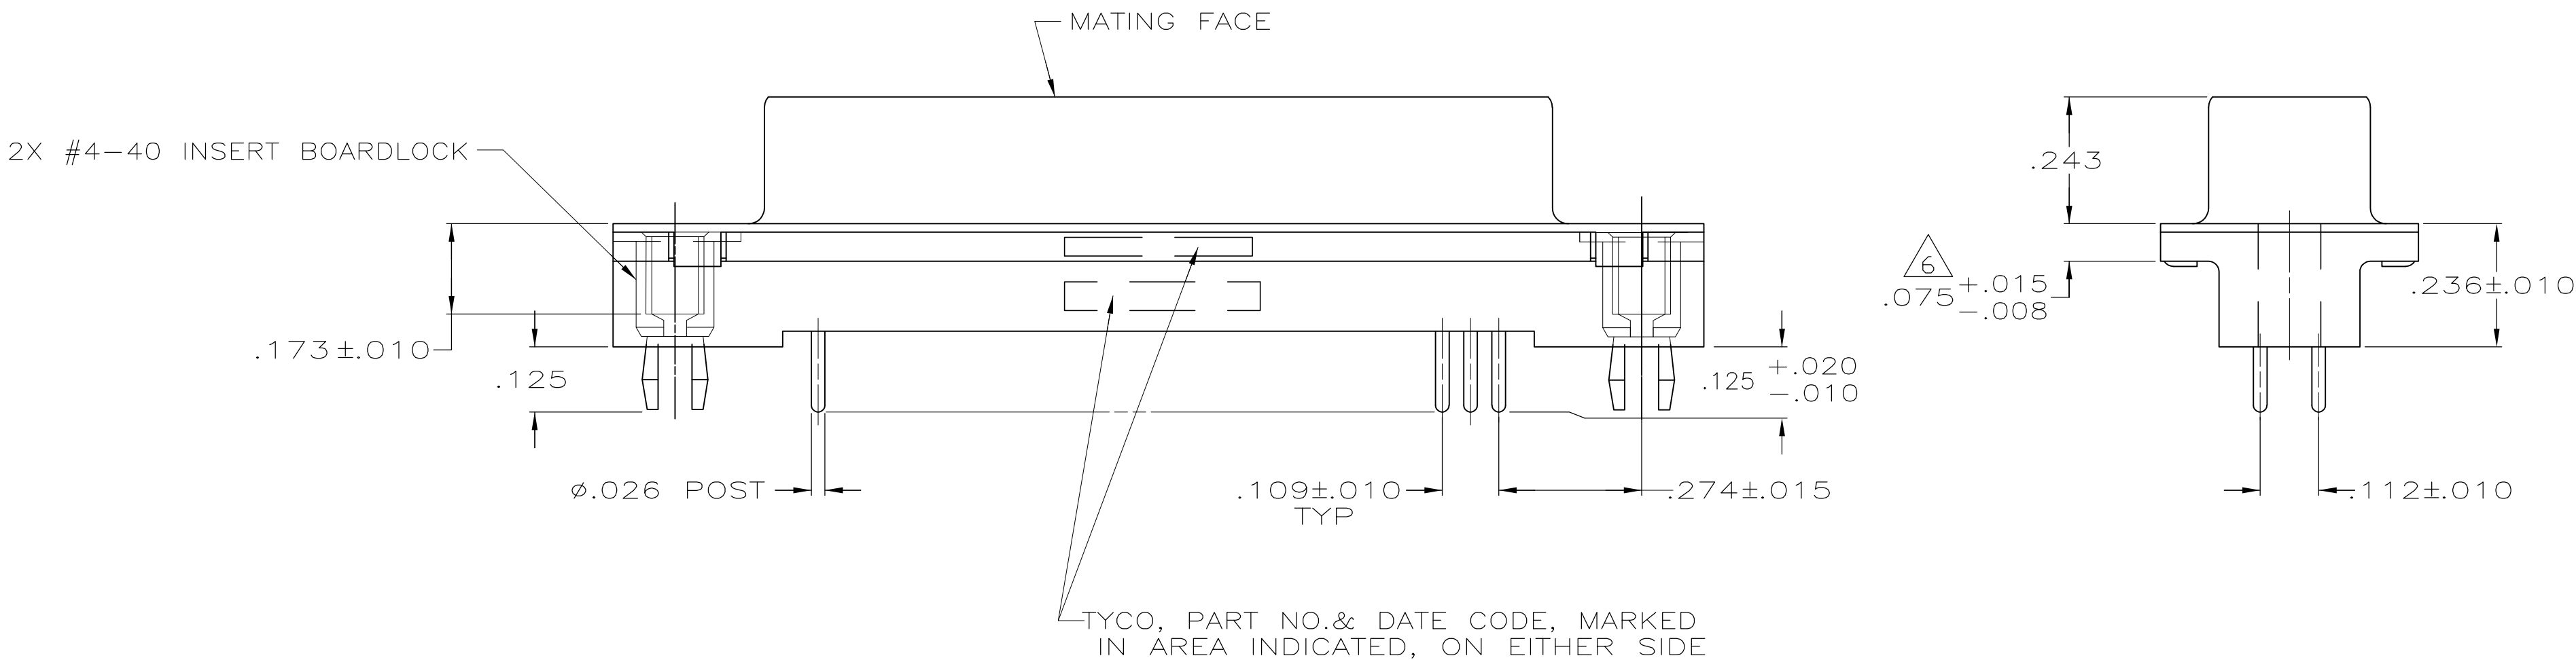

RECOMMENDED PC BOARD
MOUNTING DIMENSIONS

**COPYRIGHT 2005
TYCO ELECTRONICS CORP
ALL RIGHTS RESERVED**

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LATTUCA	27SEPT05	TE Connectivity	
		CHK S. BOLASH	27SEPT05		
DIMENSIONS: INCHES		APVD M. WALMSLEY	27SEPT10	NAME	RECEPTACLE ASSEMBLY, SIZE 3, 25 POS., VERTICAL, .026 DIA. POSTS, FRONT SHELL, RETENTION INSERTS, AMPLIMITE HD-20
		PRODUCT SPEC		SIZE	108-40025
		APPLICATION SPEC		SIZE	114-40023
MATERIAL		FINISH	WEIGHT	SIZE	100779
1		2	—	SIZE	5747708
CUSTOMER DRAWING		SCALE	4:1	SHEET	1 of 1
		REV	B		