


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
	G1	REVISED PER ECR-17-009545	04AUG2017	AS	RS

1 COPPER ALLOY.

2 TIN-LEAD PLATE PER ASTM-B-545, 2.54 μm [.000100]
MIN THICKNESS, WITH SUPPLEMENTAL ANTI FRETTING LUBRICANT.

3 TIN PLATE PER ASTM-B-545, 2.54 μm [.000100]
MIN THICKNESS, WITH SUPPLEMENTAL ANTI FRETTING LUBRICANT.

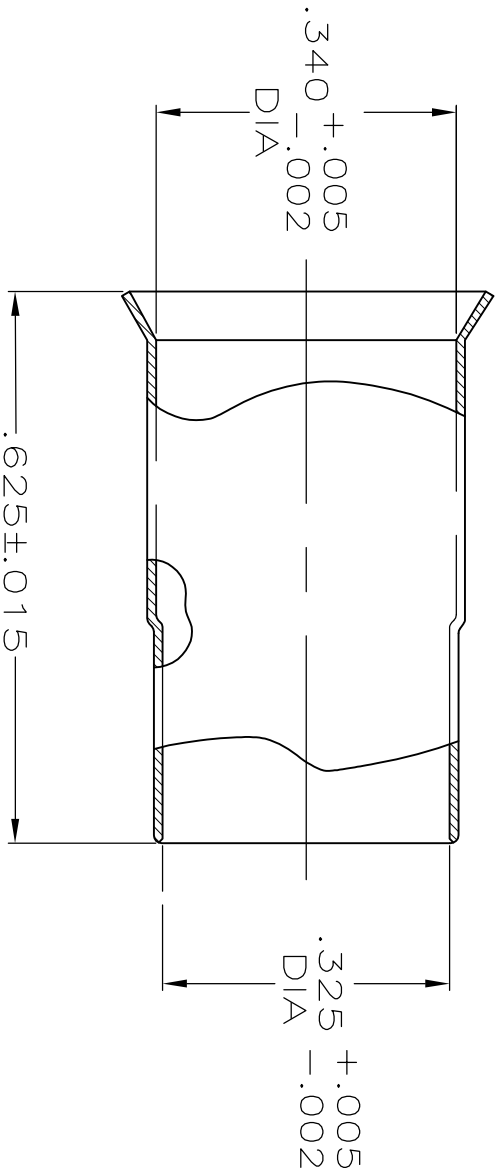

SUPERCEDED BY 9-331256-0	3	9-331256-1
	3	9-331256-0
	-	1-331256-4
	1	1-331256-0
OBSOLETE	2	331256

FINISH	PART NUMBER
--------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN M. SNEED 24SEP82	STE TE Connectivity		
DIMENSIONS: INCHES		CHK D. SMITH 12OCT82			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. SNEED 12OCT82			
PRODUCT SPEC		NAME			
0 PLC ± -		FERRULE, STEPDOWN			
1 PLC ± -					
2 PLC ± -					
3 PLC ± -					
4 PLC ± -		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL		WEIGHT	A300779G331256		-
1		CUSTOMER DRAWING			