

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	DESCRIPTION CORRECTED FROM SOLDER TO SCREW TERMINAL IN TITLE BLOCK	13NOV2014	CR	JK


1 MATERIAL: ITEM NO. 1: HOUSING - ZINC DIECASTING, NICKEL PLATED, PBT
 ITEM NO. 2: CONTACT BODY - PA
 ITEM NO. 3: CONTACT - CuSn (brass)
 CONTACT FINISH - Au (gold)

2 ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATED

3 MEASUREMENT REFERENCE ONLY

4 PACKAGING: 1 PIECE IN A BAG




TECHNICAL DATA	3-2271125-2	4-2271125-2
RATED VOLTAGE	250V	125V
RATED IMPULSE VOLTAGE	2500V	1500V
POLLUTION DEGREE	3	3
OVERVOLTAGE CATEGORY	II	II
MATERIAL GROUP	III	III
RATED CURRENT	4A	4A
VOLUME RESISTIVITY	≤ 3mΩ	≤ 3mΩ
DEGREE OF PROTECTION	IP67	IP67
UPPER TEMPERATURE	+85 °C	+85 °C
LOWER TEMPERATURE	-40 °C	-40 °C

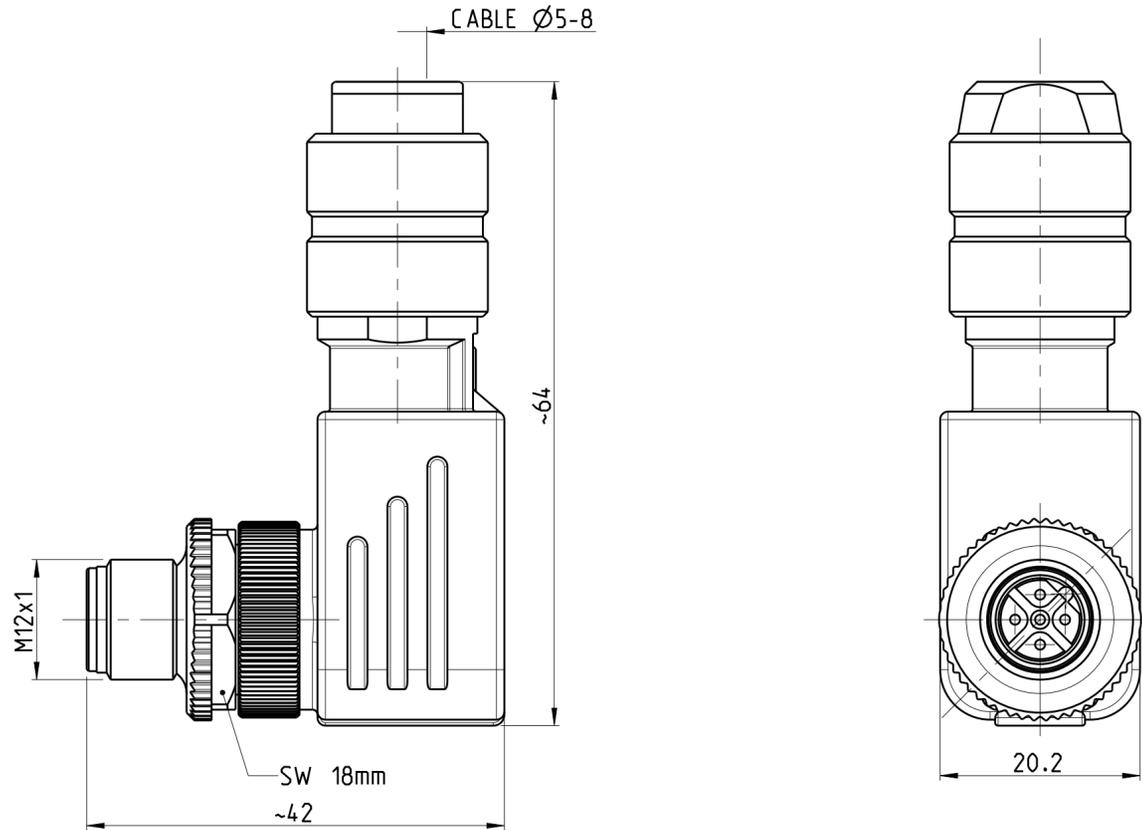

PIN ARRANGEMENT B-CODING (SCALE 2:1)

3-2271125-2

4-2271125-2

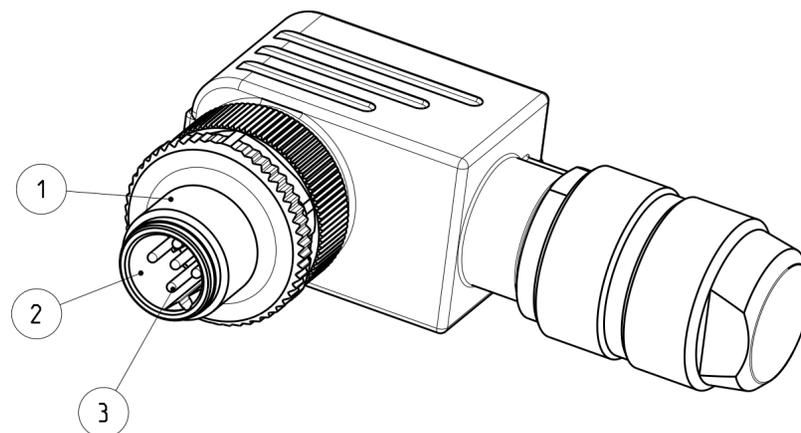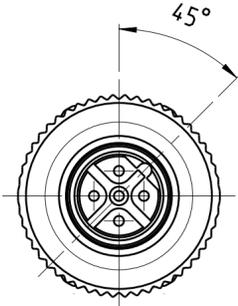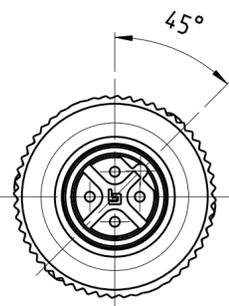

4-2 AS SHOWN WIE GEZEICHNET

CABLE FEED-THROUGH mm	WIRES AWG / mm ²	MATERIAL	NUMBER OF POLES	TE-PART-NO.
5-8	20 / 0.50mm ²	⚠	5	4-2271125-2
5-8	20 / 0.50mm ²	⚠	4	3-2271125-2

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS). THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).

DIMENSIONS: MASSEINHEITEN: (mm)	TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN
0 PLC ±	0.15
1 PLC ±	0.15
2 PLC ±	0.15
3 PLC ±	0.15
4 PLC ±	0.15
ANGLES/WINKEL	± 0.5
FINISH/OBERFLAECHE/FARBE	-

MATERIAL: -

DWN YASHKUMAR 22MAY2014	CHK M.STRELOW 22MAY2014	APVD C.SCHREITLINGER 22MAY2014
NAME: M12 MALE 90 DEG ANGLED FIELD INSTALLABLE, SHIELDED CONNECTOR, SCREW TERMINALS, B-CODING		
SIZE A2	CAGE CODE 00779	DRAWING NO. ZEICHNUNGS-NR. C-2271125
Customer Drawing	/KUNDENZEICHNUNG	SCALE MASSSTAB 2:1
SHEET BLATT 1 OF 1	REV A2	RESTRICTED TO NUR FÜR -

SIZE ISO 14405 (E)