

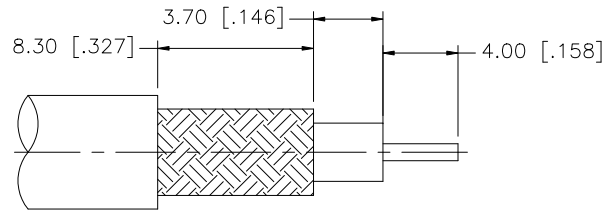
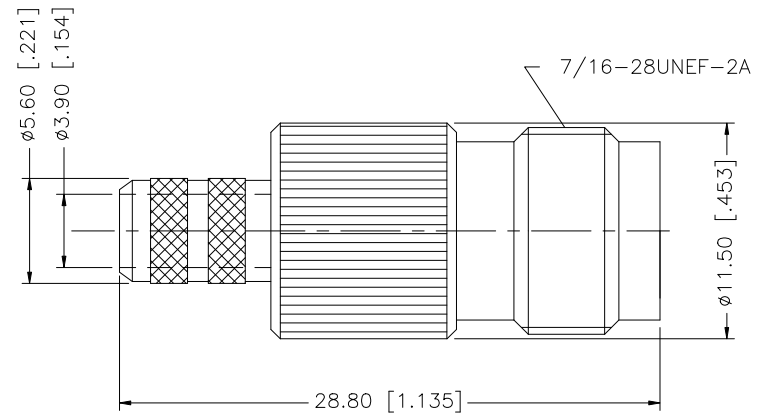


REV.	DATE	ECR NO.	DESCRIPTION
NC	02/03/09	—	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

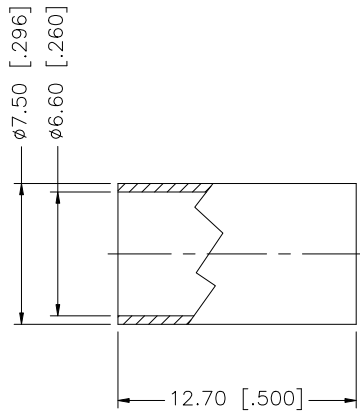

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex								
8						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN	GRS	02/03/09										
7						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"		CHECKED			PART DESCRIPTION									
6								ISSUED			TNC CRIMP JACK									
5	FERRULE	COPPER	NICKEL	1				SHEET	1 OF 1		PART NO.									
4	CONTACT PIN	PHOS. BRONZE	GOLD	1							122124									
3	INSULATOR	PTFE	NATURAL	1				CAD FILE			DWG. NO.		122124.DWG	REV.	NC	SIZE	A	SCALE	NA	
2	BODY	BRASS	NICKEL	1				C:/122/122124.DWG												
1	HOUSING	BRASS	NICKEL	1																
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING															