



0660



0660-0-15-XX-30-XX-10-0

Solder mount in .051 min. mounting hole


0677



0677-0-15-XX-30-XX-10-0

Solder mount in .051 min. mounting hole


0555



0555-0-15-XX-20-XX-10-0

Solder mount in .053 min. mounting hole
Also available on 16mm wide carrier tape: 1,800 parts per 13" reel.
Order as: 0555-0-57-XX-20-XX-10-0


0558

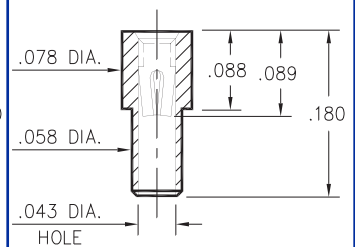

0558-0-15-XX-30-XX-10-0

Solder mount in .061 min. mounting hole

0675/0679




Basic Part Number	Length L
0675-0	.145
0679-0	.203

067X-0-15-XX-30-XX-10-0

Solder mount in .054 min. mounting hole

1065/1066/7065




Basic Part Number	Length L
1065-0	.190
1066-0	.160
7065-0	.181

X06X-0-15-XX-30-XX-10-0

Solder mount in .055 min. mounting hole


0682



0682-0-15-XX-32-XX-10-0

Solder mount in .056 min. mounting hole
Also available on 16mm wide carrier tape: 1,500 parts per 13" reel.
Order as: 0682-0-57-XX-32-XX-10-0


0667



0667-0-15-XX-30-XX-10-0

Solder mount in .057 min. mounting hole
Also available on 16mm wide carrier tape: 1,700 parts per 13" reel.
Order as: 0667-0-57-XX-30-XX-10-0


0665



0665-0-15-XX-30-XX-10-0

Solder mount in .061 min. mounting hole

4286

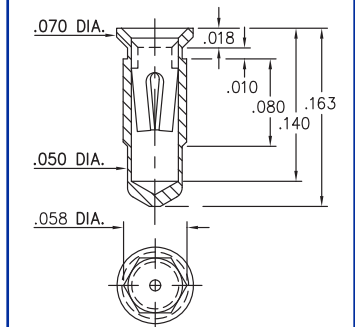

4286-0-15-XX-30-XX-10-0

Hex press-fit in .055 plated thru hole

SPECIFICATIONS

SHELL MATERIAL:
Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
Beryllium Copper Alloy 172, HT

DIMENSION IN INCHES
TOLERANCES ON:
LENGTHS: ±.005
DIAMETERS: ±.002
ANGLES: ±.002°

ORDER CODE: XXXX - X - 15 - XX - XX - XX - 10 - 0

BASIC PART #

SPECIFY SHELL FINISH:

- 01 200μ" TIN/LEAD OVER NICKEL
- ◇ 80 200μ" TIN OVER NICKEL (RoHS)
- ◇ 15 10μ" GOLD OVER NICKEL (RoHS)



SPECIFY CONTACT FINISH:

- 02 100μ" TIN/LEAD OVER NICKEL
- ◇ 84 100μ" TIN OVER NICKEL (RoHS)
- ◇ 27 30μ" GOLD OVER NICKEL (RoHS)

SELECT CONTACT

#30 or #32 CONTACT (DATA ON PAGE 219)