
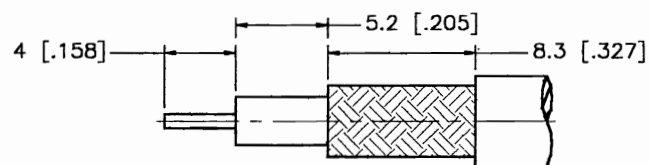
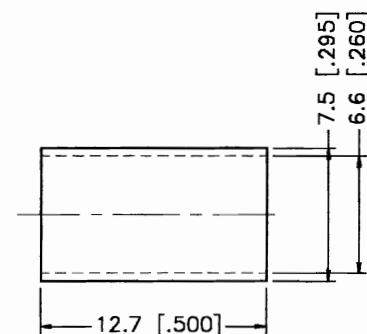
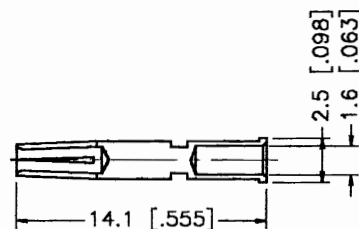


RECOMMENDED
MOUNTING HOLE

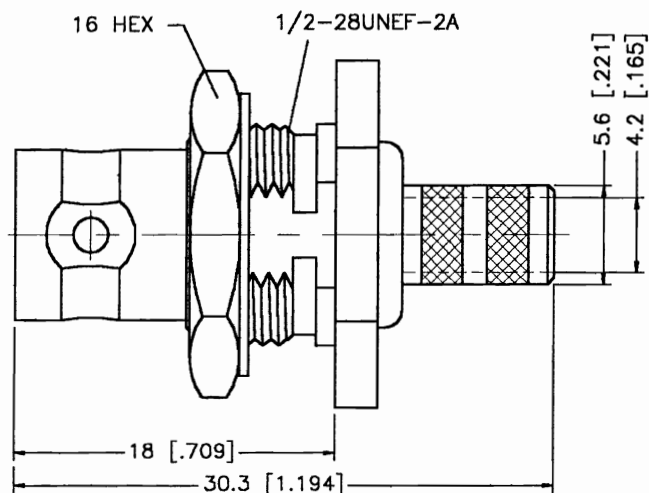

RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	DESCRIPTION
NC	08/18/98	INITIAL RELEASE

	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE										
1	BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.	08/18/98	TITLE BNC BULKHEAD JACK – LMR 240								
2	INSULATOR	TEFLON	NATURAL		CHECKED											
3	CONTACT PIN	PHOS. BRONZE	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5–6 = ± 0.2 6–30 = ± 0.4 30–120 = ± 0.6 120–315 = ± 1 315–1000 = ± 1.6 1000–2000 = ± 2.4	ISSUED			SIZE A			FSCM NO. 99001		DWG. NO. 112602.DWG		REV. NC	
4	FERRULE	COPPER	NICKEL													
5																
6																
7																
8				DO NOT SCALE DRAWING			SCALE	NA	PART NO.	112602	SHEET	1 OF 1				

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1
315-1000 = ± 1.6
1000-2000 = ± 2.4

DO NOT SCALE DRAWING