

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
MINNEAPOLIS, MINN.

FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING

10BS210

10BS210

M

DRAWING
NUMBER

ISSUE

REPLACES

RELEASE NO. SR 9212

CHECK

REVISIONS

A	C080053
JALA 5 APR 95	

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

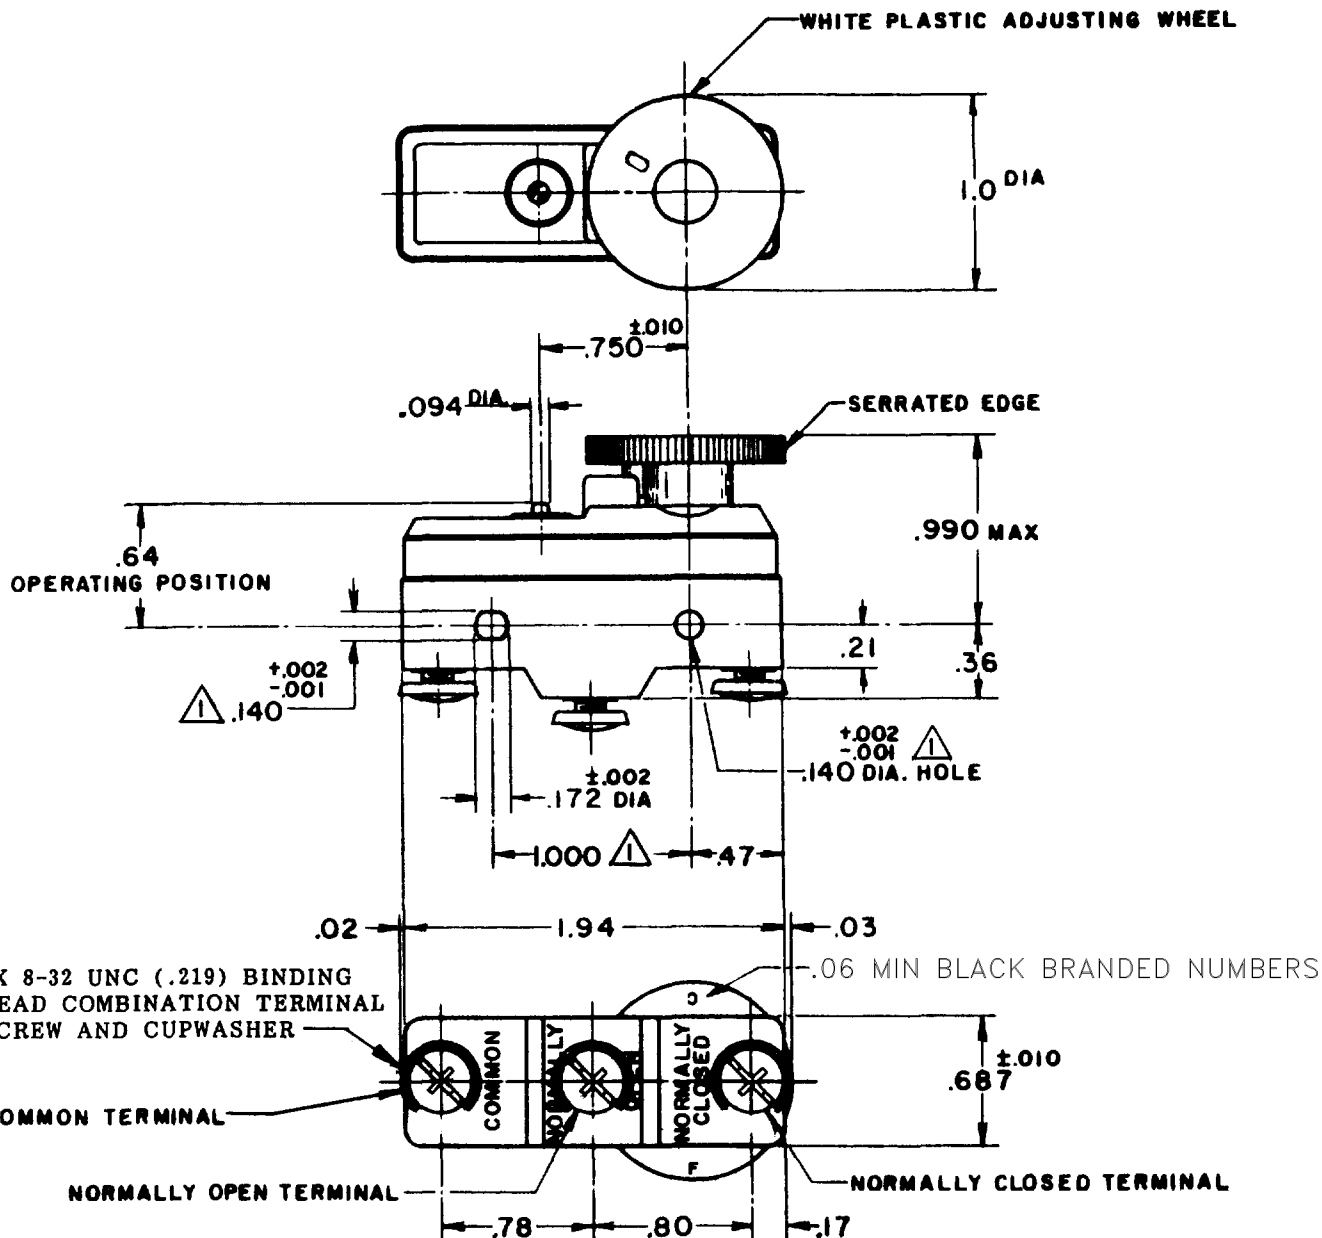

NOTE:

- △ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON 1.000^{±.002} CENTERS.
- 2-DIAL WHEEL IS SHOWN AT THE MAX SETTING OF BREAK DISTANCE.
- 3-DIAL WHEEL ROTATION 300°

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS (AT MIN SETTING)

AT MIN SETTING
OPERATING FORCE — — — — — 11-20 OZ
RELEASE FORCE — — — — — 10 OZ MIN
DIFFERENTIAL TRAVEL — — — — .0015-.0025

AT MAX SETTING
DIFFERENTIAL TRAVEL — — — — .007 MIN
OVERTRAVEL — — — — .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L17

20A 125, 250 OR 480 VAC
3/4 HP 125 VAC, 1 1/2 HP 250 VAC

W C

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED

DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.000
TWO PLACE (.00) ±.010
THREE PLACE (.000) ±.005
ANGLES ± 10°

WEIGHT

FORMTEK

DRAWN

MBF

31 AUG 60

31 AUG 60

31 AUG 60

31 AUG 60

31 AUG 60

31 AUG 60

31 AUG 60

31 AUG 60

31 AUG 60

31 AUG 60