

5


4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75.01-802


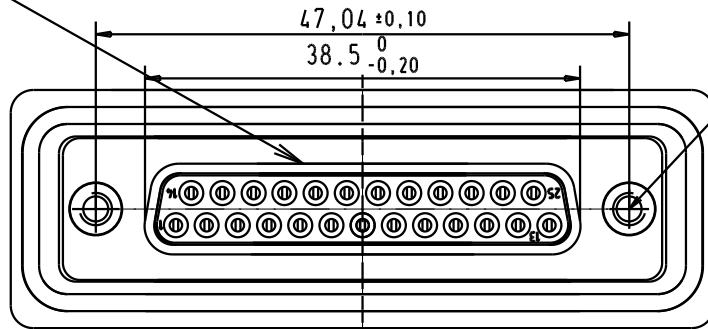


4-40 UNC -2B
length of engagement 3.5

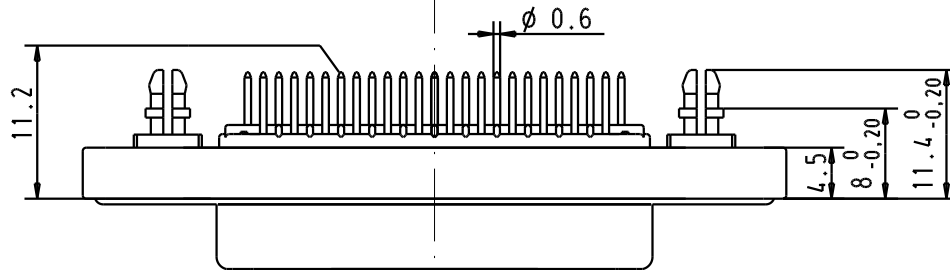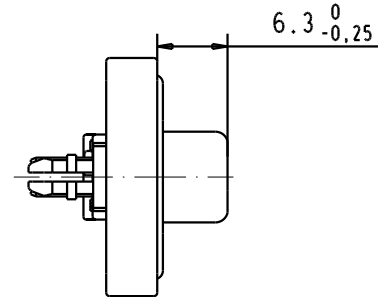

1) Protection standard IP 67 according to IEC 529 / DIN 40050.

PCB layout hole
component side
(PCB holes plating : Tin)

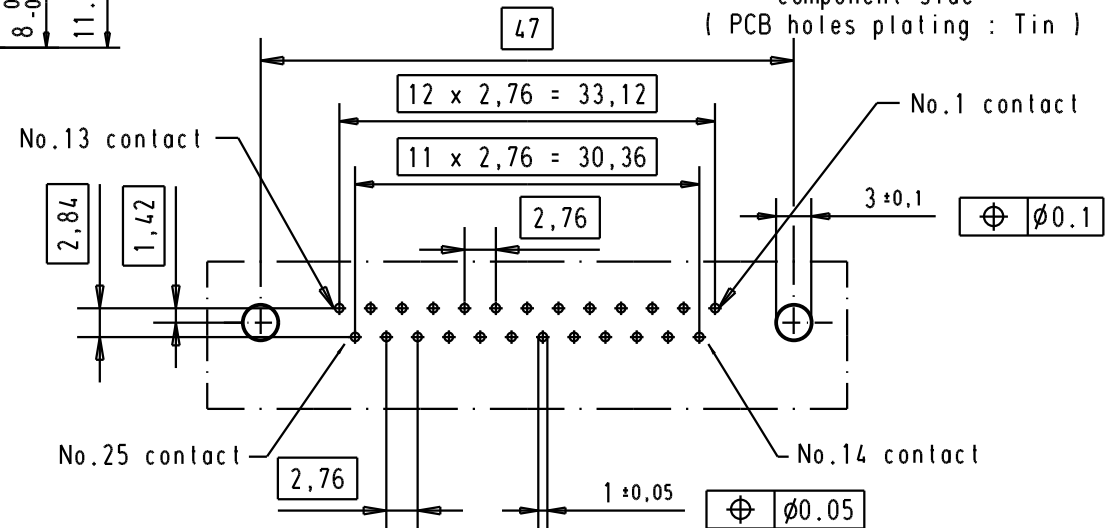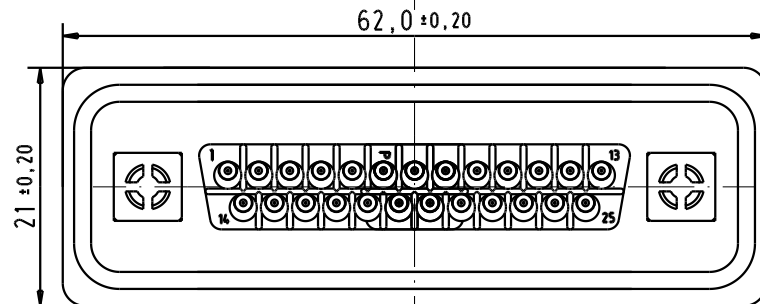

09 67 525 6775

Au plating 0,76 µm mini

Dat.

Name



All Dim. in mm
Orig. Size DIN A 4

D-SUB IP67 female 25 Poles
straight solder pin with
4-40 UNC Spacer and clip

Moßstab/
Scale

Detail. 08/01/04 S.H.

Insp.

Stand.

HARTING ELEKTRONIK
F-95972 Paris



TB 09 67 525 6775

Blatt/ Page

Part Number

Performance Level

31587

08/01/04

S.H.

Mod.

Dat.

Name

Sub.