


REV.	DATE	DESCRIPTION
NC	01/17/06	UPDATE DRAWING FORMAT

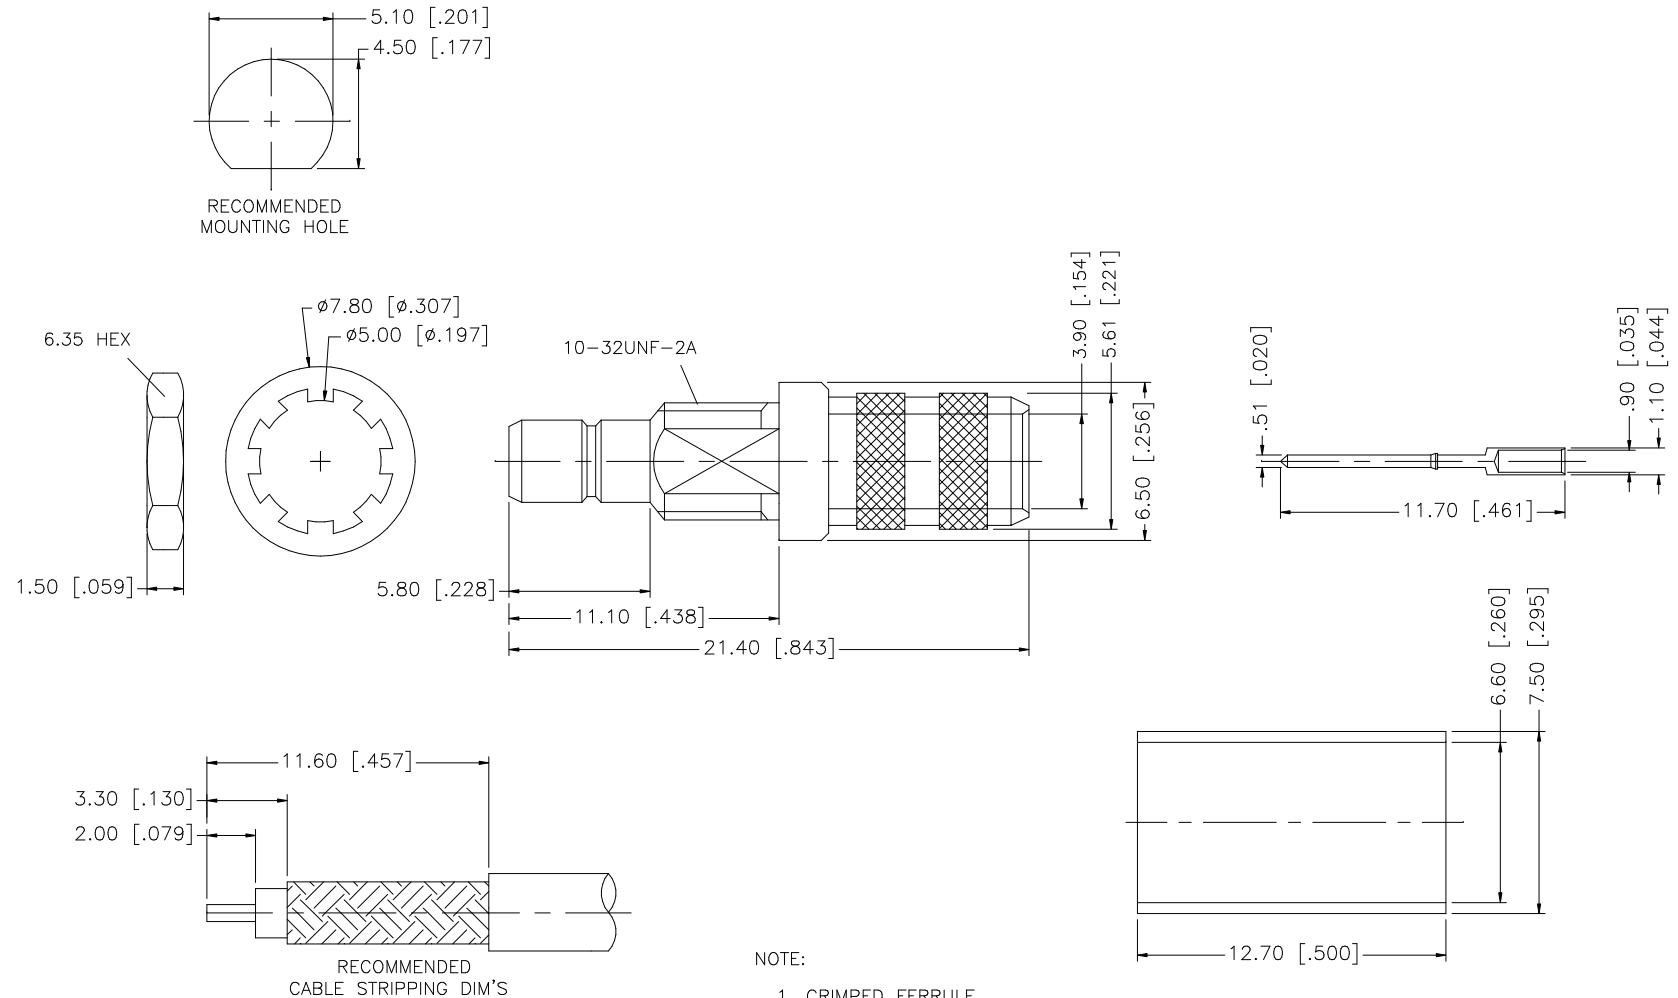

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.					01/17/06			
7						CHECKED			PART DESCRIPTION MINI 75ohm SMB CRIMP JACK (FOR RG-59/U 20AWG CABLE)						
6	HEX NUT	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	ISSUED									
5	LOCK WASHER	BRASS	GOLD	1		SHEET	1 OF 1		PART NO. 142337-75						
4	FERRULE	COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	CAD FILE C:/142/142337-75.DWG		DWG. NO.					142337-75.DWG	REV.	NC
3	CONTACT PIN	BRASS	GOLD	1		DO NOT SCALE DRAWING									
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	GOLD	1											
DESCRIPTION		MATERIAL	FINISH	QTY											