NOTES:

I. MATERIALS AND FINISHES:

BODY - BRASS, NICKEL PLATING CONTACT PIN - PHOSPHOR BRONZE, GOLD PLATING

INSULATOR - PTFE, NATURAL

LOCK RING - BRASS, GOLD PLATING FERRULE - BRASS, NICKEL PLATING

2. ELECTRICAL:

A. IMPEDANCE: 75 OHM

B. FREQUENCY RANGE: DC - 12 GHz

C. RETURN LOSS (VSWR): 20dB (1.22) DC-6 GHz

15dB (1.43) 6-12 GHz

D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.

3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.

B. TEMPERATURE RANGE: -30°C TO +85°C

4. CRIMPED FERRULE

HEX. CRIMP SIZE .255"

5. CRIMPED CONTACT PIN HEX. CRIMP SIZE 0.042" SHOWS CABLE ENTRY DIMENSIONS


7. PACKAGING:

A. QUANTITY: SINGLE PACK

B. BAG TO BE MARKED: AMPHENOL RF 31-70555-12G

YYWW

THIRD ANGLE PROJ. 🕀 🖯 REVISIONS DESCRIPTION Α RELEASE TO MFG.

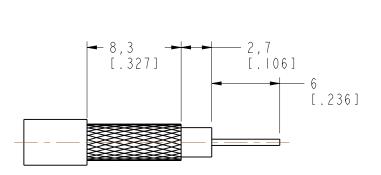

SCALE 2.000

DATE


24-Sep-18 09442


ECN

APPR

SV

RECOMMENDED CABLE STRIPPING DIMENSIONS

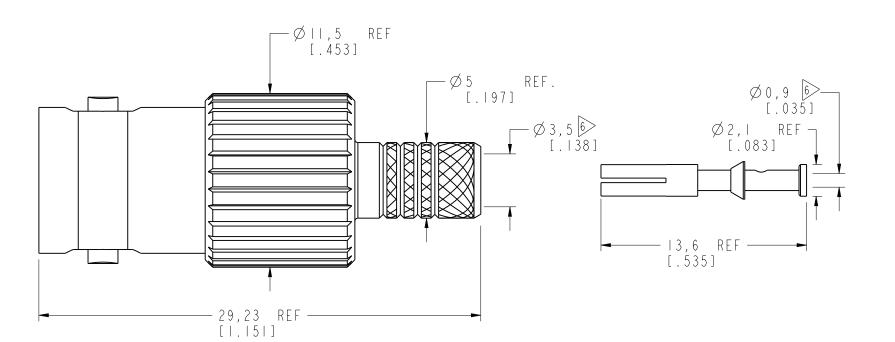

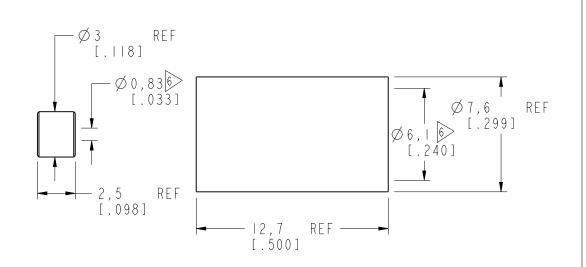

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

I ONLESS OTHERWISE STECTIFIED, D	IMENSIONS AND I	METRIC AND TOLLNANCES AND.
<0.5mm 0.5 - 6mm	6 - 30mm	30 - I20mm ANGLES
$\pm$ 0.05mm $\pm$ 0.1mm	$\pm$ 0.2mm	$\pm$ 0.3mm $\pm$ 1 $^{\circ}$
NOTICE - These drawings, specific	ations, or other	data (I) are, and remain the
property of Amphenol corp. (2) m		
confidential and not to be disclo		
are given by Amphenol Corp. the		
other data by Amphenol Corp., or		
not to be regarded by implication		
rights to permitting such holder		
any product, process or design, p		
related to or disclosed by said d	rawings, speciti	cations, or other data.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

MATERIAL	DRAWN	DATE	TITLE
SEE NOTES	S.VO	11-Jun-18	IRNC (
	ENGINEER	DATE	7///
REFERENCE	S.VO	- Jun -   8	I CAN
EAR# 8258	APPROVED	DATE	J C A B L 1
REF:			SCALE:
CONFIGURATION LEVEL: In Work	CAD FILE		
FINISH			

IIILE			
BNC CRIMP	JACK -	-75 OHN	4
(CANARE L-3.3CUHD			
CABLE)			
SCALE: 4.0:1.0	SHEET 2 0	F 2	7
DWG SIZE		REV	ᆛ

Amphenol Kt			
www.amphenolrf.com			
DRAWING NO	. 31-70555-12G		
ITEM NO.	3   - 7 0 5 5 5 -   2 G		
PART NO.	31-70555-12G		